
PART NUMBER	GT-NE6E1925T	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
12.13.06	E.C.N. #11148.		Α
01.03.12	E.C.N. #10BRDR. & REDRAWN.		В

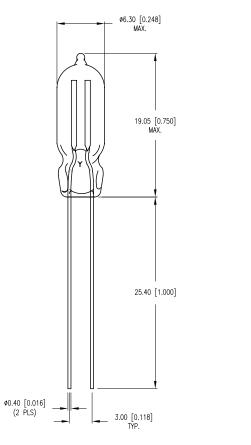

ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNITS
OPERATING VOLTAGE STARTING VOLTAGE(AC) OPERATING CURRENT LIGHT OUTPUT LIFE HOURS	90	5.0 500 15,000	115 85	V V mA mLM HOURS

NOTES:
1. EXTERNAL RESISTOR VALVE 8.2K OHMS.
2. LEADS TINNED.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+}$ $^{-}$ INCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

NEON LAMP, 6.3mm DIA. HIGH BRIGHTNESS. **THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.**

CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. SECEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMMATION TO ALL THIRD PARTIES.

ON	DIVCL	111/1/10	ED DOCUMENT		
D	ATE:	01.03.12		DRAWN BY:	AB
P	PAGE:	1 OF 1	_	CHKD BY:	SS
S	SCALE:	NTS		APRVD BY:	JD
U	UNIT: mm [INCH]		Pb)		