


PART NUMBER	GT-CZ3-200	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
12.12.06	E.C.N. #11148.		A
01.03.12	E.C.N. #10BRDR. & REDRAWN.		B

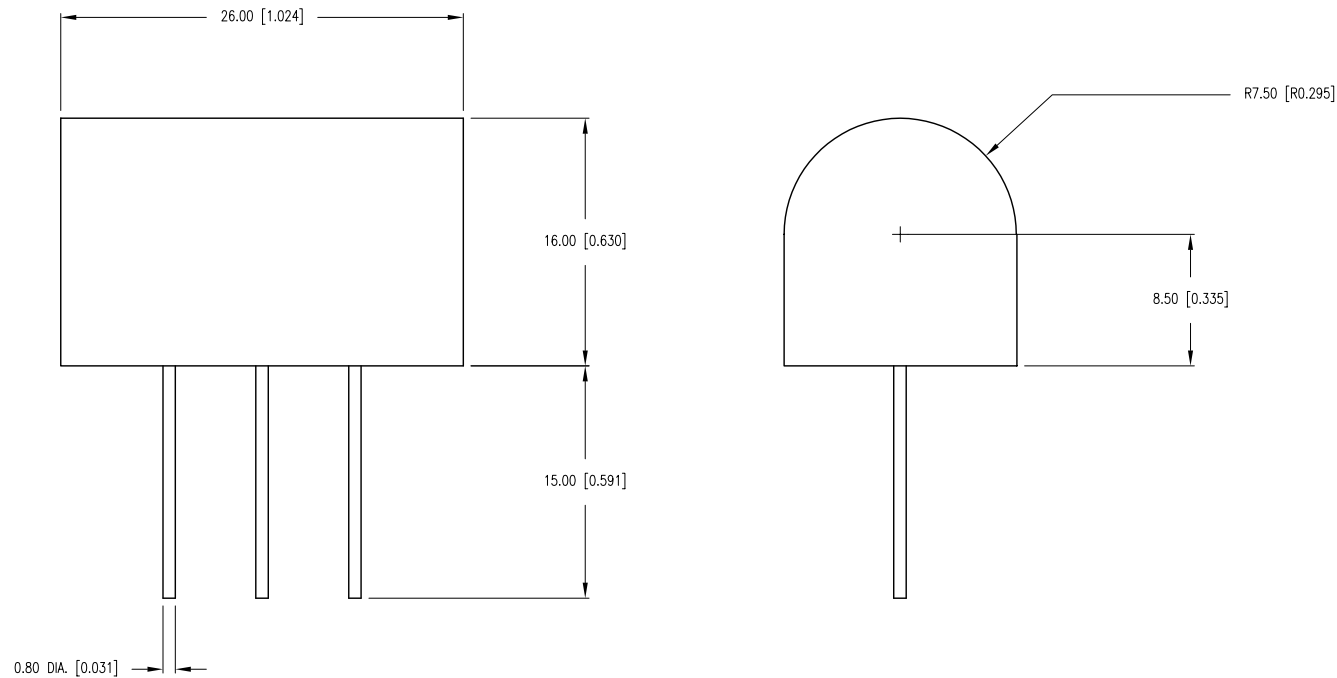

CIRCUIT VOLTAGE AC	PEAK CIRCUIT VOLTS AC	CLAMPING VOLTS MAX.	CURRENT LOAD	INSULATION RESISTANCE	CAPACITANCE MAX.
220	2000	700	1250 A	100 M MIN.	3 pF

NOTES:

1. RAMP SPEED 2000V/ μ S.
2. 8/20 S WAVE FORM.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= $\begin{matrix} +\text{DECIMAL PRECISION} \\ -0.00 \end{matrix}$ MAX.= $\begin{matrix} +0.00 \\ -\text{DECIMAL PRECISION} \end{matrix}$

UNCONTROLLED DOCUMENT

LUMEX Creating LED and LCD Solutions Together™	290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM	D.C. CIRCUIT PROTECTOR PACK.		DATE: 01.03.12	DRAWN BY: AB
		THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.		PAGE: 1 OF 1	CHKD BY: SS
		CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		SCALE: NTS	APRVD BY: JD
				UNIT: mm [INCH]	Ⓟ