


PART NUMBER	GT-NE6H1325	REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
10.07.96	E.C.N. #10257.		A
12.14.06	E.C.N. #11148.		B
01.03.12	E.C.N. #10BRDR. & REDRAWN.		C

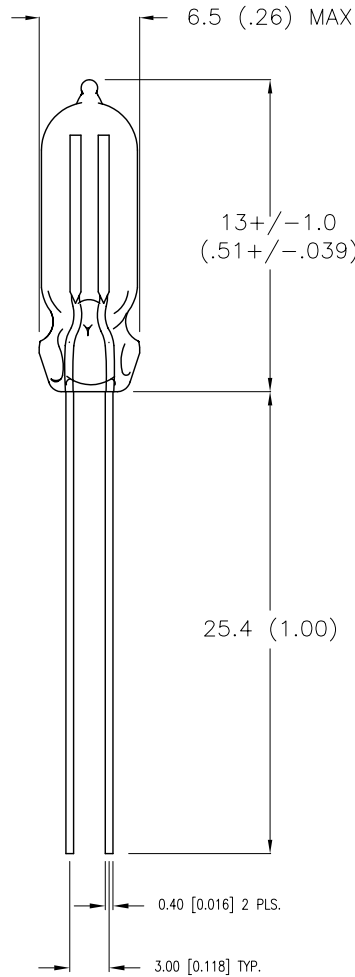

ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNITS
OPERATING VOLTAGE	90		115	VOLT
STARTING VOLTAGE (AC)			95	VOLT
(DC)			135	VOLT
OPERATING CURRENT		1.5		mA
LIGHT OUTPUT		120		mLM
LIFE HOURS		25,000		HOURS

NOTES:

- EXTERNAL RESISTOR VALUE 33K OHMS
- LEAD FINISH UNTINNED (UT) OR TINNED (T).

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= ^{+DECIMAL PRECISION}/_{-0.00} MAX.= ^{+0.00}/_{-DECIMAL PRECISION}

UNCONTROLLED DOCUMENT

 290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM	NEON LAMP, 6.3 DIA. HIGH BRIGHTNESS.		DATE: 01.03.12	DRAWN BY: AB
	THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.		PAGE: 1 OF 1	CHKD BY: SS
	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		SCALE: NTS	APRVD BY: JD
			UNIT: mm [INCH]	Ⓟ