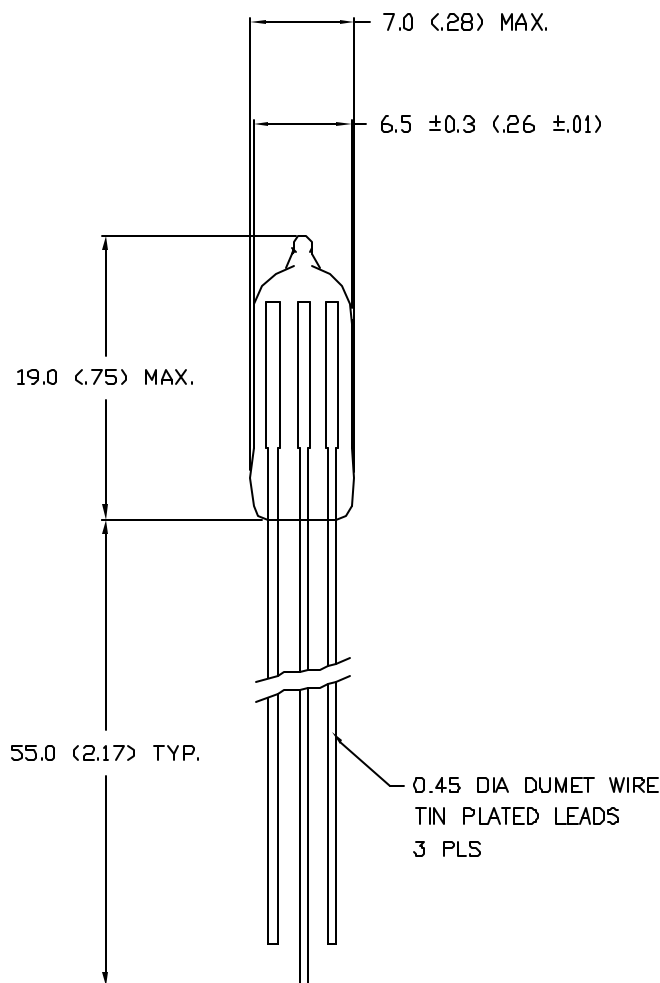


UNCONTROLLED DOCUMENT

PART NUMBER
GT-RLSA3080DREV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	12.18.06

ELECTRICAL SPECIFICATIONS

D.C. FIRING VOLTAGE (dv/dt 500V/s):	300 $\pm$ 30%
IMPULSE FIRING VOLTAGE ($dv/dt=5kv/\mu s$):	1000 VDC MAX
PEAK IMPULSE CURRENT (8/20 μs FORM):	2.5KA
IMPULSE SURGE LIFE (8/20 μs 500A):	1000 TIMES MIN.
D.C. HOLDOVER VOLTAGE:	50VDC
A.C. DISCHARGE CURRENT (1s X 5):	1 AMP
A.C. FOLLOW-ON CURRENT:	1 AMP
INSULATION RESISTANCE (50VDC MIN.):	$10^{10} \Omega$
INTER-ELECTRODE CAPACITANCE:	2pF

ENVIRONMENTAL TESTING

THERMAL SHOCK:	MIL-STD-202 METHOD 107 TEST COND B
HUMIDITY:	MIL-STD-202 METHOD 103B TEST COND B
TEMP CYCLING:	MIL-STD-202 METHOD 102A TEST COND C
OPERATING TEMP.:	-40°C TO +100°C



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00, MAX= +0.00 -DECIMAL PRECISION

REV.
APART NUMBER
GT-RLSA3080D

LIGHT DUTY RADIAL LEAD ARRESTOR.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 12.18.06
JC			PAGE: 1 OF 1
			SCALE: N/A