


UNCONTROLLED DOCUMENT

UNDER REVISION

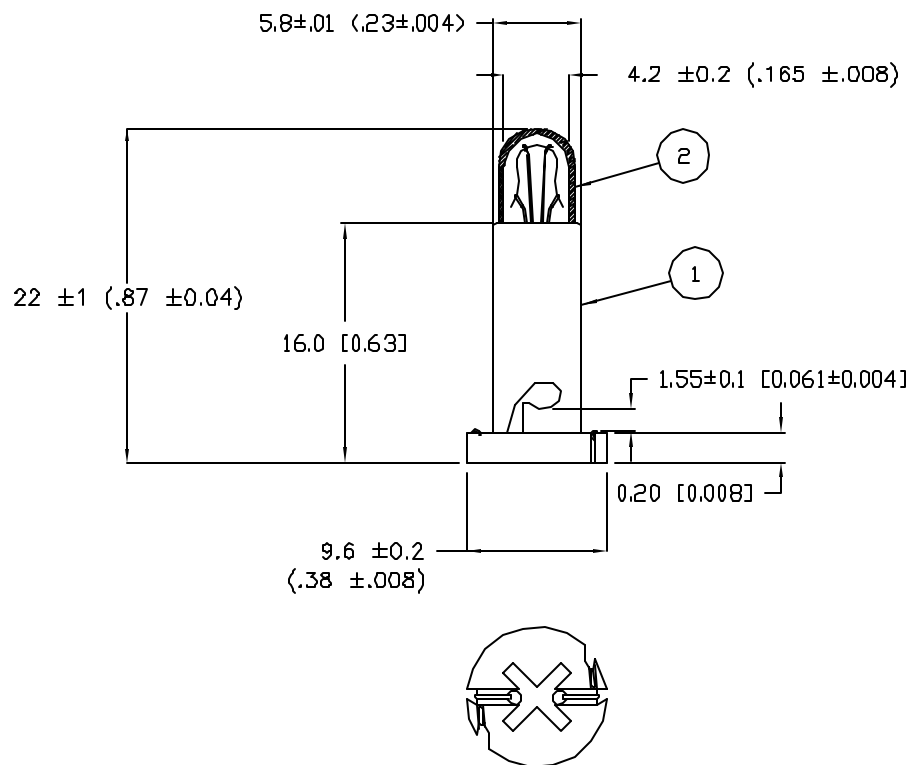

BILL OF MATERIALS

1. IFL-NWEB414100-5
2. IFL-LX39-4-B275

NOTE

X,Y COORDINATES WITH
SILICON ATTACHED
≈ X=0.190 Y=0.400


PART NUMBER
IFL-EB414100-B275REV.
C

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	UPDATED RATES INTENSITY./	12.20.94
B	E.C.N. #10BRDR./	10.13.97
C	E.C.N. #11148.	12.22.06

ELECTRICAL SPECIFICATIONS

OPERATING VOLTAGE	14
OPERATING CURRENT	100 mA
Ⓐ RATED INTENSITY *	.438 M.S.C.P.
RATED LIFE, AVG. @ 14V (HRS)	10,000 HRS
FILAMENT SHAPE:	C-2F

* MEASURED WITHOUT SILICON BOOT

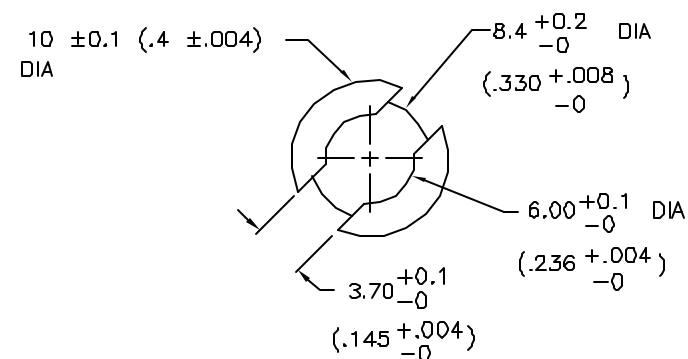

RECOMMENDED PANEL CUT-OUT



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX= +0.00 -DECIMAL PRECISION

REV.

C

PART NUMBER

IFL-EB414100-B275

T-1 1/4 EXTENDED BASE NEO-WEDGE LAMP, 14V, 100mA
WITH SILICON BOOT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 12.20.94

PAGE: 1 OF 1

SCALE: N/A