


UNCONTROLLED DOCUMENT

PART NUMBER
IFL-LX1252-24

REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	12.27.06

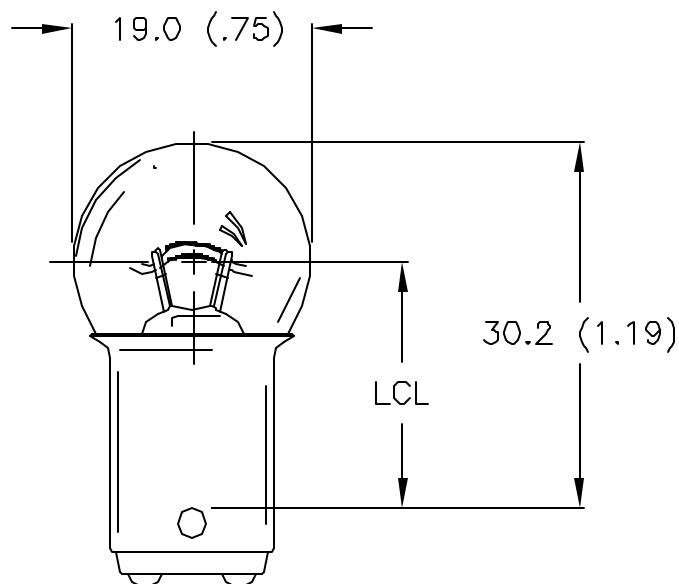

ELECTRO-OPTICAL SPECIFICATIONS

OPERATING VOLTAGE:	24 VDC OR VAC
OPERATING CURRENT @24V:	220mA
INITIAL LIGHT OUTPUT @24V:	2.5 MSCP
AVERAGE LIFE @24AC:	5,000 HRS. AVG.

MECHANICAL SPECIFICATIONS

BULB TYPE/SHAPE:	G18 METRIC .66 AMERICAN
BASE TYPE:	BA15D METRIC OR DOUBLE CONTACT BAYONET, NICKEL PLATED BRASS

APPLICABLE INDUSTRY FEDERAL SPECS

FEDERAL STOCK NBR:	6240-00-019-0877
FEDERAL SPECIFICATION:	W-L-00111/125-24

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING:	MIL-E-5400N GRAPH IV
SHOCK TEST:	MIL-STD-883 METHOD 2002 TEST CON A
OPERATING TEMPERATURE:	-50 TO +100°C
STORAGE TEMPERATURE:	-50 TO +125°C
SOLDERABILITY OF LEADS:	N/A



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.
A

PART NUMBER
IFL-LX1252-24

G18 INCANDESCENT LAMP, BA15D BASE.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 12.27.06
JC			PAGE: 1 OF 1
			SCALE: N/A