


UNCONTROLLED DOCUMENT

PART NUMBER
IFL-LX1820GPT

REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	12.27.06

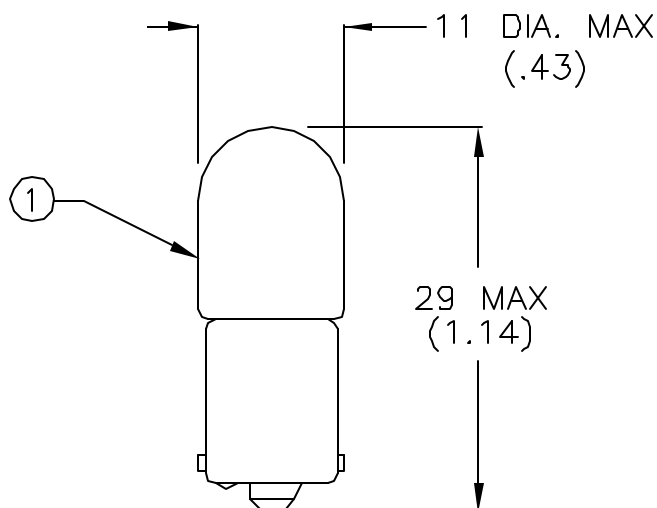

ELECTRO-OPTICAL CHARACTERISTICS

OPERATING VOLTAGE:	28 VAC OR 28 VDC
FORWARD CURRENT @ 28 V:	100 mA
INTENSITY:	1.6 MSCP (2)
AVERAGE LIFE @ 14 VAC:	1000 HRS
BASE TYPE:	BA9S

NOTES

- (1) GLASS ENVELOPE PAINTED COMMERCIAL GREEN PER SPP# 7001.
- (2) INTENSITY OF UNPAINTED LAMP.



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.
A

PART NUMBER
IFL-LX1820GPT

T-3 1/4 INCANDESCENT LAMP, GREEN PAINTED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 12.27.06
JC			PAGE: 1 OF 1
			SCALE: N/A