

UNCONTROLLED DOCUMENT


PART NUMBER

IFL-LX464

REV.

A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	04.10.07

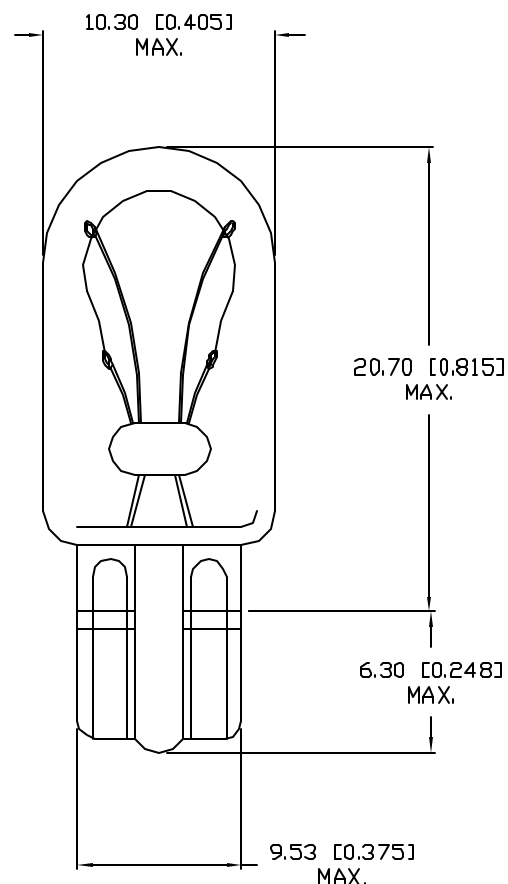

ELECTRO-OPTICAL SPECIFICATIONS

OPERATING VOLTAGE VAC OR VDC	24-30
DESIGN VOLTAGE VDC OR VAC:	28.0
CURRENT DRAW @ DESIGN VOLTS:	170 mA
M.S.C.P. @ DESIGN VOLTS:	3.0 M.S.C.P.
AVERAGE LIFE @ DESIGN VOLTS:	600 HRS

MECHANICAL SPECIFICATIONS

BULB SIZE AND SHAPE:	T-10 TUBULAR
BULB GLASS TYPE	KG12 SEMI SOFT
BASE OR LEAD FINISH:	WEDGE
FILAMENT SHAPE:	C-2F
L.C.L. IF APPLICABLE:	N/A
MANUFACTURING PSS:	IFL/T-10WB

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING:	MIL-E-5400N, GRAPH IV
SHOCK TEST :	MIL-STD-883 METHOD 2002 TEST CON A
OPERATING TEMPERATURE:	-50 TO +100 °C
STORAGE TEMPERATURE:	-50 TO +125 °C



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

REV.

A

PART NUMBER

IFL-LX464

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

T-3 1/4 (T10 x 27mm) ALL GLASS WEDGE BASE LAMP.

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
JC			4.9.91
			PAGE: 1 OF 1
			SCALE: N/A