


UNCONTROLLED DOCUMENT

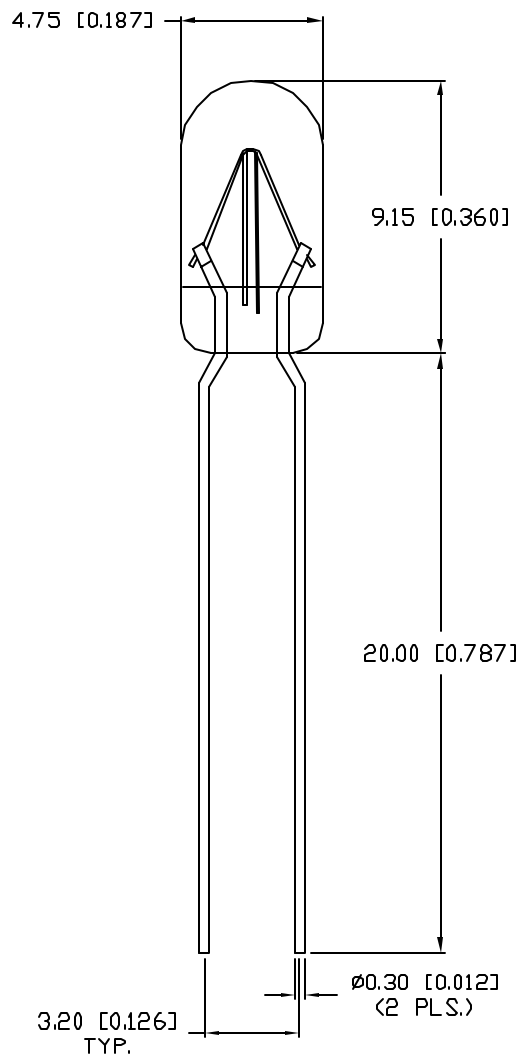

PART NUMBER		REV.
IFL-LX514135-LF		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	01.11.07

ELECTRICAL SPECIFICATIONS	W/OUT BOOT ATTACHED
OPERATING VOLTAGE VAC. OR VDC.	12-16V
DESIGN VOLTAGE VAC. OR VDC.	14V
CURRENT DRAW @ DESIGN VOLTS	135mA
M.S.C.P. @ DESIGN VOLTS	80±25%M.S.C.P.
AVERAGE LIFE @ DESIGN VOLTS (AC)	10,000 HOURS

MECHANICAL SPECIFICATIONS	
BULB SIZE & SHAPE	T4mm TUBULAR
BASE OR LEAD FINISH	UNTINNED
FILAMENT SHAPE	C-2V
MANUFACTURING P55	T3nW 3044

ENVIRONMENTAL SPECIFICATIONS	
VIBRATION TESTING	MIL-E-5400N, GRAPH IV
SHOCK TEST	MIL-STD-883 METHOD 2002
	TEST CONDITION A
OPERATION TEMP.	-50 TO +100°C
STORAGE TEMP.	-50 TO +125°C
SOLDERABILITY OF LEADS	MIL-STD 202F, METHOD 208D



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX= +0.00 -DECIMAL PRECISION

REV.	PART NUMBER	CONFIDENTIAL INFORMATION		LUMEX INC.	
A	IFL-LX514135-LF	THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw	
T-4mm (T-1 1/2) SUB MINIATURE LAMP, 14 VOLTS, 135mA, GLASS BI PIN, LEAD FREE.		RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		DRAWN BY: JC	CHECKED BY: APPROVED BY: DATE: 11.10.03 PAGE: 1 OF 1 SCALE: N/A

UNCONTROLLED DOCUMENT