


UNCONTROLLED DOCUMENT

PART NUMBER
IFL-LXA66024050

REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.13.07

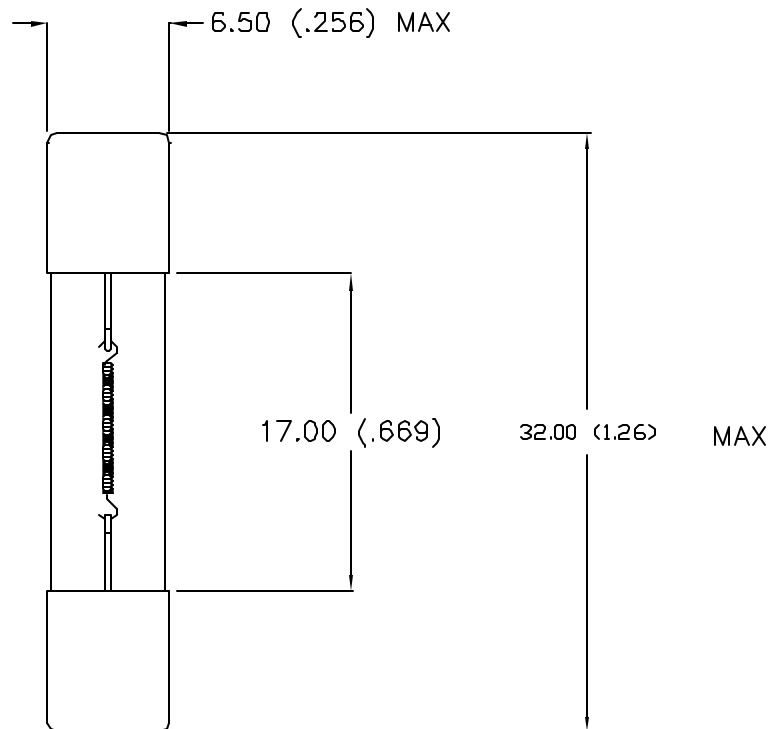

ELECTRO-OPTICAL CHARACTERISTICS $T_A=20mA$

OPERATING VOLTAGE:	24 VOLTS AC/DC
OPERATING VOLTAGE RANGE:	20 - 28V
OPERATING CURRENT @24V:	50mA $\pm 10\%$
OPERATING MSCP @24V:	0.30 $\pm 25\%$
OPERATING LIFE @24V AC:	2000 HRS. MIN.

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING:	MIL-E-5400N, GRAPH IV
SHOCK TEST:	MIL-STD-883 METH 2002 TEST CON A
OPERATING TEMPERATURE:	-50 TO +100 °C
STORAGE TEMPERATURE:	-50 TO +125 °C
SOLDERABILITY OF LEADS:	N/A

MATERIAL SPECIFICATIONS

GLASS TUBING: 6.5mm SOFT GLASS
LEAD WIRES: 0.3mm DUMET
END CAPS: SF6/6 (2)
GAS/VACUUM: VACUUM TYPE



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.
A

PART NUMBER
IFL-LXA66024050

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

T6.5 FESTOON LAMP, SF6/6 END CAPS.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 8.21.85 PAGE: 1 OF 1 SCALE: N/A
-----------------	-------------	--------------	---