
UNCONTROLLED DOCUMENT

PART NUMBER IFL-LXAL563150 REV.

REV. E.C.N. NUMBER AND REVISION COMMENTS DATE E.C.N. #11148. 4,16,07

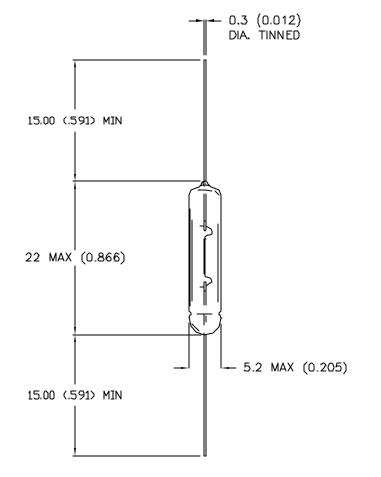

ELECTRO-OPTICAL CHARACTERISTICS AT =20mA

DPERATING VOLTAGE: 6.3V

150mA+/-10% FORWARD CURRENT

INTENSITY 0.27 M.S.C.P. AVERAGE LIFE 10,000 HRS BASE TYPE AXIAL LEADS

LEAD FINISH TINNED

UNCONTROLLED DOC

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0,039), XXX=±0.5 (±0,020), XXXX=±0.127 (±0,005). LEAD SIZE=±0.05 (±0,002), LEAD LENGTH=±0.75 (±0,030). NN=+DECINAL PRECISION MAX.= +0.01 (±0,005).

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE: 8.11.92 PAGE: 1 OF 1

SCALE:

N/A

AXIAL LAMP.

REV.

PART NUMBER

IFL-LXAL563150

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX N.G. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SANE IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

JC