


IFL-LXW414060

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.18.07

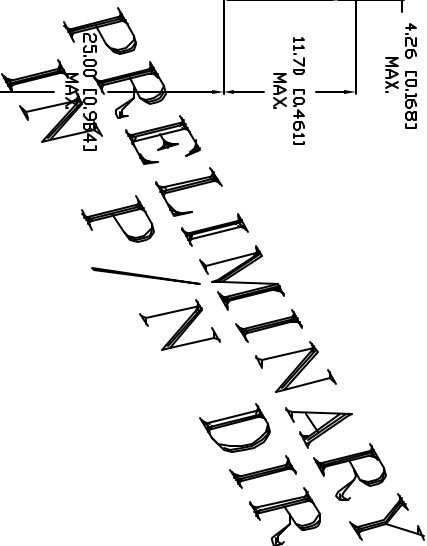

ELECTRICAL SPECIFICATIONS W/O BOOT ATTACHED

OPERATING VOLTAGE VAC. OR VDC.	12-16V
DESIGN VOLTAGE VAC. OR VDC.	14V
CURRENT DRAW * DESIGN VOLTS	60 nA
M.S.C.P. * DESIGN VOLTS	.16 M.S.C.P.
AVERAGE LIFE * DESIGN VOLTS	15,000 HOURS

MECHANICAL SPECIFICATIONS

BULB SIZE & SHAPE	T4.2mm TUBULAR
BULB GLASS TYPE	KG12 SEMI SOFT
BASE OR LEAD FINISH	TINNED
FLAMENT SHAPE	C-2F
MANUFACTURING P55	IF/L/T 4.2WMM

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING	MIL-E-5400N, GRAPH IV
SHOCK TEST	MIL-STD-883 METHODE 2002
OPERATION TEMP.	TEST CONDITION A
STORAGE TEMP.	- 50 TO +100 °C
SOLDERABILITY OF LEADS	- 50 TO +125 °C
	MIL-STD 202F, METHODE 208D

[illegible]

REV.	PART NUMBER	CAUTION: INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND REDEMATION TO ALL THIRD PARTIES. RELIABILITY NOTICE OUR MANY YEARS OF EXPERIENCE HAVE ACCUMULATED INSIGHT THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND PREMATURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.	
A	IFL-LXW414060		
T-1 1/4 (42000) WIRE TERMINAL LAMP.		280 E. HELEN ROAD PALATINE, IL 60067-8978 PHONE: +1.847.358.2780 FAX: +1.847.358.2780 WWW: www.lumex.com E-MAIL: info@lumex.com TW WEBB: www.lumex.com/tw	
DRAWN BY: J.C.		CHECKED BY: APPROVED BY: DATE: 12.24.97 PAGE: 1 OF 1 SCALE: N/A	