

UNCONTROLLED DOCUMENT

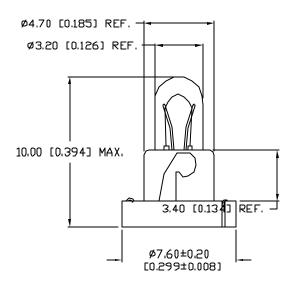

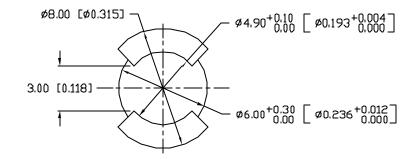

RECOMMENDED PANEL CUT-OUT

RECOMMENDED PANEL THICKNESS .059

PART NUMBER

IFI - NW3025100

REV. E.C.N. NUMBER AND REVISION COMMENTS DATE Α E.C.N. #10BRDR, & REDRAWN. 8-10-98 E.C.N. #11148. 01.16.07 В

ELECTRICAL SPECIFICATIONS

W/OUT BOOT ATTACHED

OPERATING VOLTAGE VAC. OR VDC. DESIGN VOLTAGE VAC. OR VDC. CURRENT DRAW @ DESIGN VOLTS

2.0 - 3.0V2.5V 100mA

REV.

В

M.S.C.P. @ DESIGN VOLTS

0.10±0.15% M.S.C.P.

AVERAGE LIFE @ DESIGN VOLTS (AC)

10,000 HOURS

/MECHANICAL SPECIFICATIONS

BULB SIZE & SHAPE BULB GLASS TYPE BASE OR LEAD FINISH

T3mm TUBULAR K 12 SOFT GLASS BLACK NYLON 66, 15% GLASS

FILAMENT SHAPE MANUFACTURING P55

C-2F T3nW 3044

/ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING

MIL-E-5400N, GRAPH IV

SHOCK TEST

MIL-STD-883 METHOD 2002 TEST CONDITION A

OPERATION TEMP. STORAGE TEMP.

- 50 TO + 100 °C - 50 TO + 125 °C

SOLDERABILITY OF LEADS

N/A

NOTE:

BASE COLOR: BLACK



*UNLESS OTHERWISE SPECFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0,039), XX=±0.5 (±0,020), XXX=±0.25 (±0,010), XXXX=±0.127 (±0,005). LEAD SIZE=±0.05 (±0,002), LEAD LENGTH=±0.75 (±0,030). MN=+DECIMAL PRECISION MAX.=+0.000

PART NUMBER REV. IFL-NW3025100

> T3 INCANDESCENT LAMP. WITH TWIST AND LOCK BASE,

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847,359,2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 11.5.97 PAGE: 1 OF 1 SCALE: N/A

JC