


DATE	REVISIONS	REV
3-4-97	E.C.N. #10315./	A
10-13-97	E.C.N. #10BRDR./	B

DRAWING NUMBER
IFL-NW414090-B27.5

REV
B


UNDER REVISION

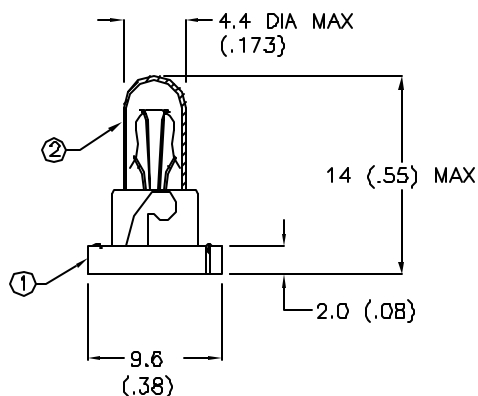

ELECTRICAL SPECIFICATIONS

OPERATING VOLTAGE	14
OPERATING CURRENT	90 mA
RATED INTENSITY *	.48 M.S.C.P.
RATED LIFE, AVE @ 14V (HRS)	25,000 HRS
FILAMENT SHAPE:	C-2F

* MEASURED WITHOUT SILICON BOOT

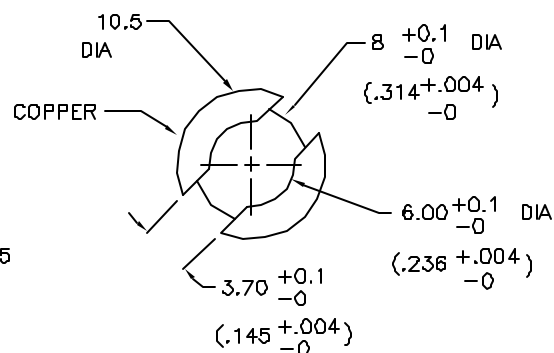

BILL OF MATERIALS:

- IFL-NW414090.
- ILF-LX39-4-B27.5

RECOMMENDED PANEL CUT-OUT

NOTE
X,Y COORDINATES WITH
SILICON ATTACHED
≈ X=0.190 Y=0.400

UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm .25\text{mm}$ ($\pm 0.010''$)

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(847) 359-2790

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED.
EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT
SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 1-26-93	DWN:	CHK'D:	APPD:
SCALE: N/A			

T 4.4 x 14 NED WEDGE 10.5/6 CUT-OUT
WITH BLUE BOOT ATTACHED

PAGE 1 OF 1

DRAWING NUMBER
IFL-NW414090-B27.5

REV
B