
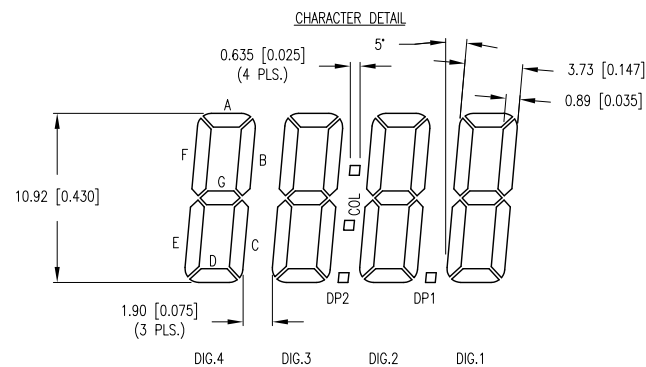
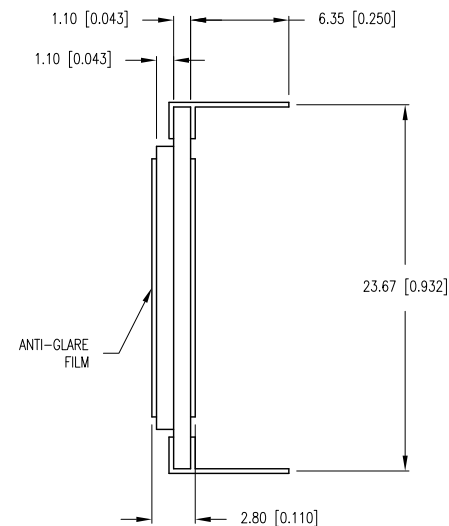


PART NUMBER	LCD--UH401M43TF-1	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
04.17.07	E.C.N. #11148.		A
10.30.12	E.C.N. #10BRDR. & REDRAWN.		B

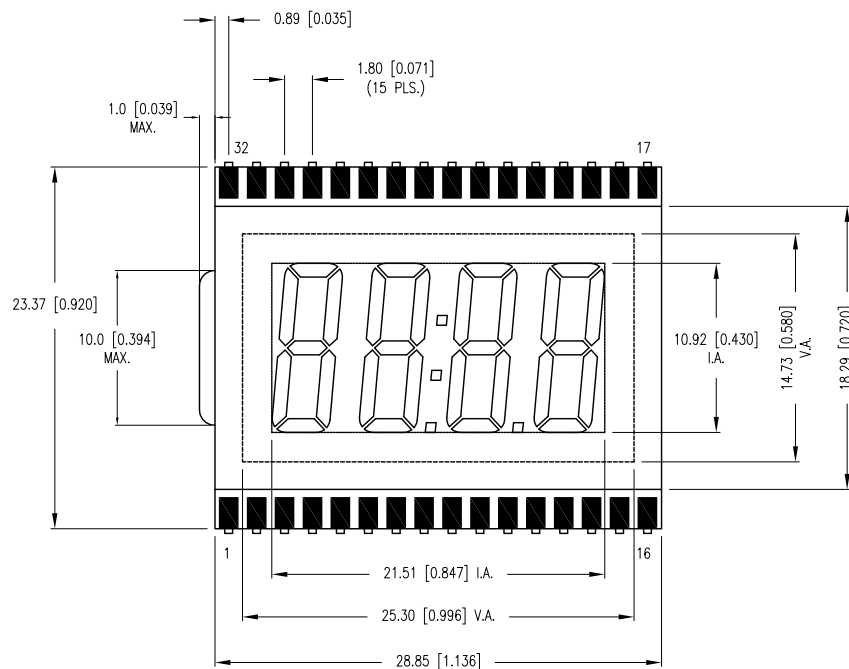

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	11:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V AC
OPERATING TEMP.	-40°C TO +80°C
STORAGE TEMP.	-40°C TO +80°C
DRIVING METHOD	STATIC
CONNECTION TYPE	32 PINS

PIN	1	2	3	4	5	6	7	8
SEG	COM	E4	D4	C4	E3	D3	C3	DP2
PIN	9	10	11	12	13	14	15	16
SEG	E2	D2	C2	DP1	E1	D1	C1	B1
PIN	17	18	19	20	21	22	23	24
SEG	A1	F1	G1	G2	B2	A2	F2	COL
PIN	25	26	27	28	29	30	31	32
SEG	B3	A3	F3	G3	B4	A4	F4	G4

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION} -0.00 ^{-DECIMAL PRECISION} MAX.= ^{+DECIMAL PRECISION} -0.00 ^{-DECIMAL PRECISION}

UNCONTROLLED DOCUMENT

0.43" CHAR HEIGHT, 4 DIGIT CUSTOM LCD PANEL, TN, TRANSFLECTIVE, 12:00 VIEW, EXTENDED OPERATING TEMP.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	10.30.12	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Ⓢ