
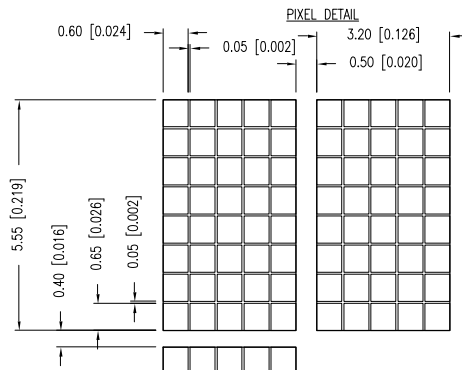


UNCONTROLLED DOCUMENT
PROPRIETARY PART

PART NUMBER
LCD-H02002DSR-A

REV.

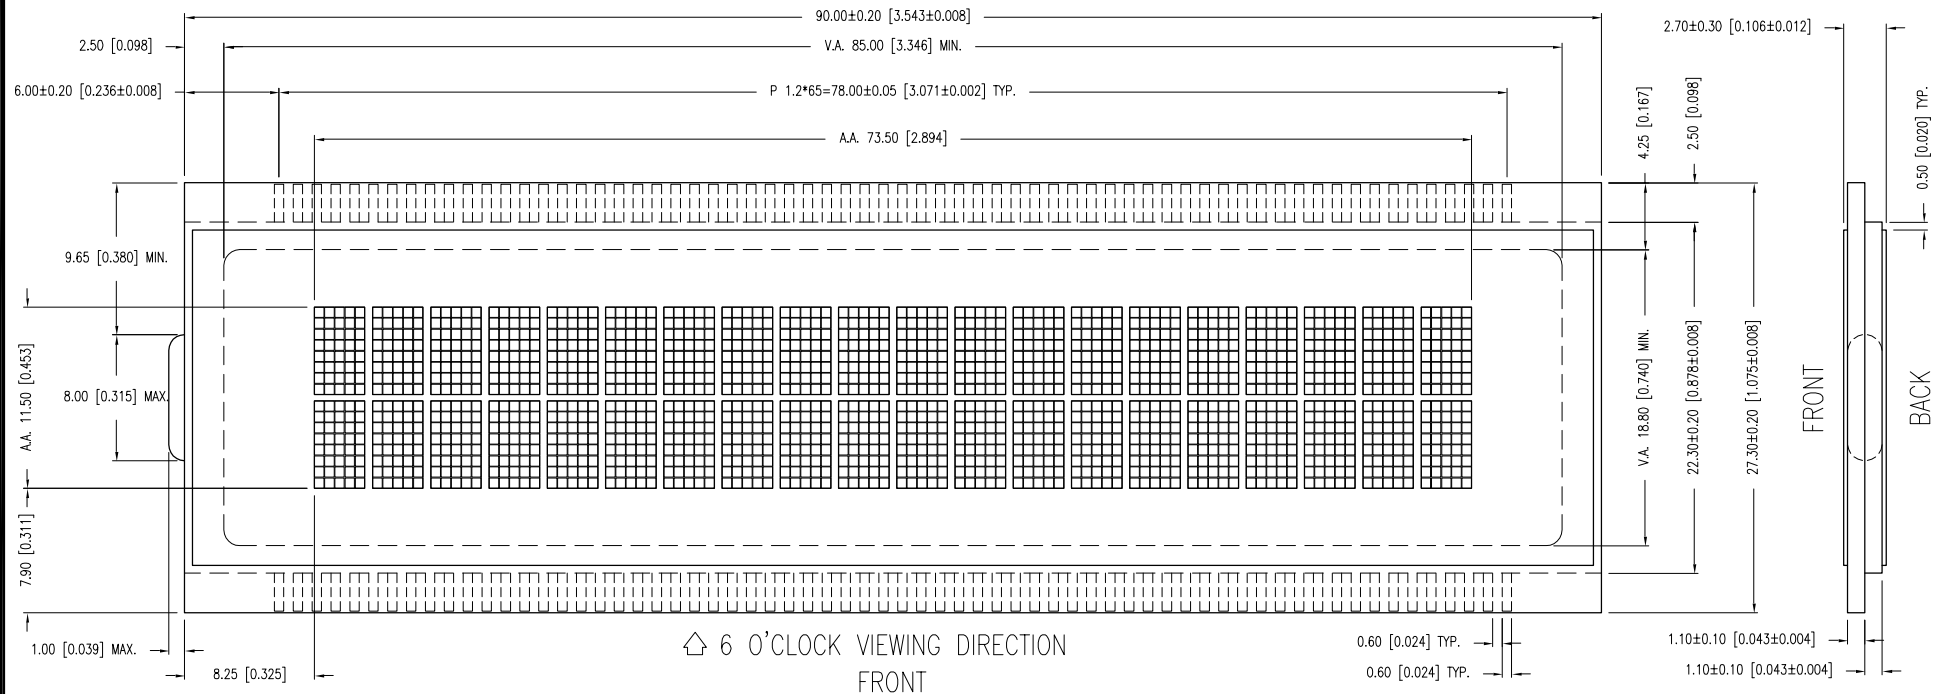

CHARACTERISTICS	
DISPLAY TYPE	STN/GRAY
VIEWING DIRECTION	6 O'CLOCK
POLARIZER MODE	REFLECTIVE/POSITIVE
DRIVE METHOD	1/16 DUTY, 1/4 BIAS
OPERATING VOLTAGE	4.5V (REF. VOLTAGE)
OPERATING TEMP.	-20°C TO +70°C
STORAGE TEMP.	-30°C TO +80°C
CONNECTION	ZEBRA

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER
LCD-H02002DSR-A

20x2 LCD PANEL, STN GRAY, 6 O'CLOCK VIEWING ANGLE.
REFLECTIVE.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 08.20.02
--			PAGE: 1 OF 1
			SCALE: N/A