



PROPRIETARY PART

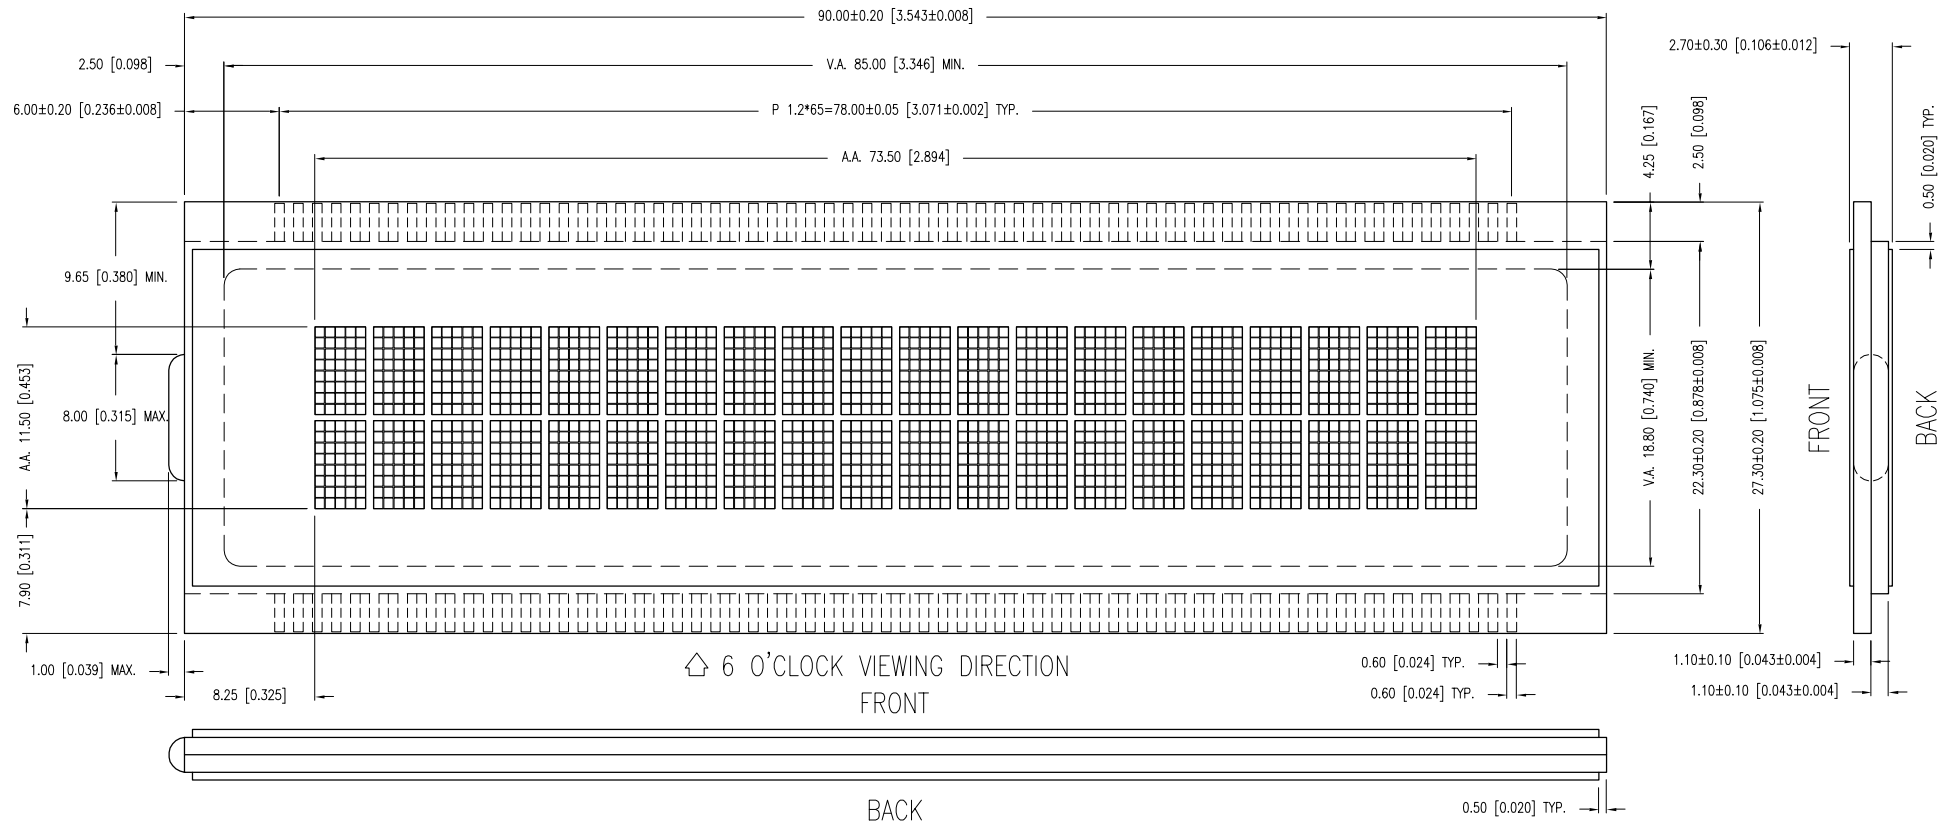

PIXEL DETAIL

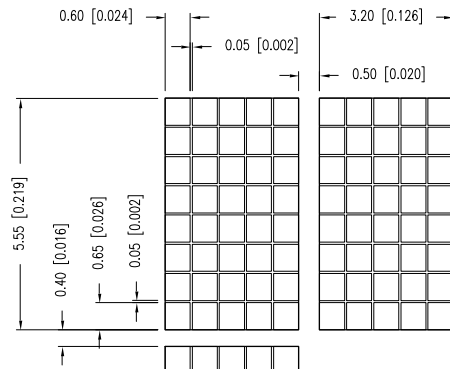

CHARACTERISTICS	
DISPLAY TYPE	STN/GRAY
VIEWING DIRECTION	6 O'CLOCK
POLARIZER MODE	REFLECTIVE/POSITIVE
DRIVE METHOD	1/16 DUTY, 1/4 BIAS
OPERATING VOLTAGE	4.5V (REF. VOLTAGE)
OPERATING TEMP.	-20°C TO +70°C
STORAGE TEMP.	-30°C TO +80°C
CONNECTION	ZEBRA

PROPRIETARY PART

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

20x2 LCD PANEL, STN GRAY, 6 O'CLOCK VIEWING ANGLE, RELECTIVE.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 12.09.10	DRAWN BY: AB
PAGE: 1 OF 1	CHKD BY: --
SCALE:	APRVD BY: --
UNIT: mm [INCH]	(P)

UNCONTROLLED DOCUMENT