






UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H201M40TF-1D

REV.

B

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10634.	6.29.00
B	E.C.N. #11148	03.13.07

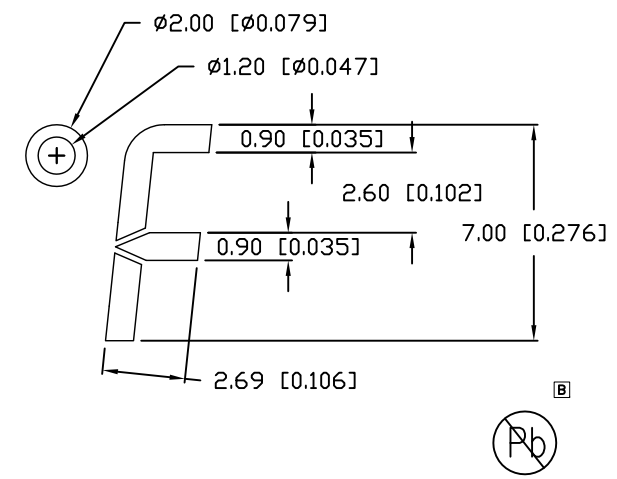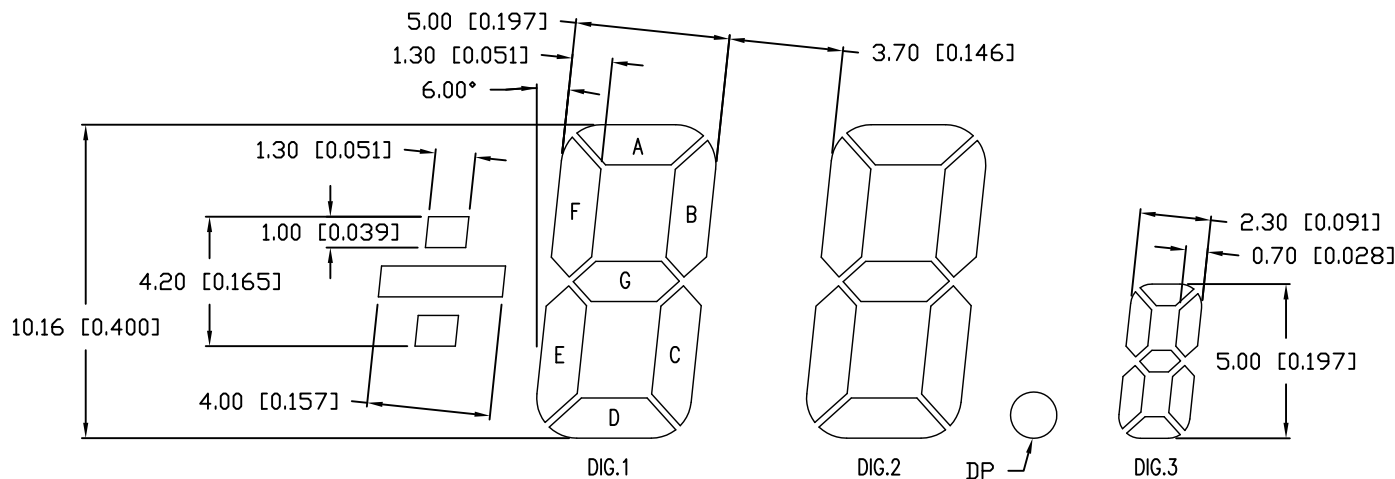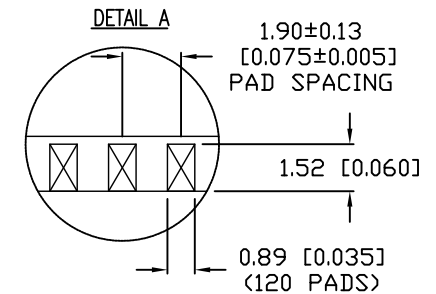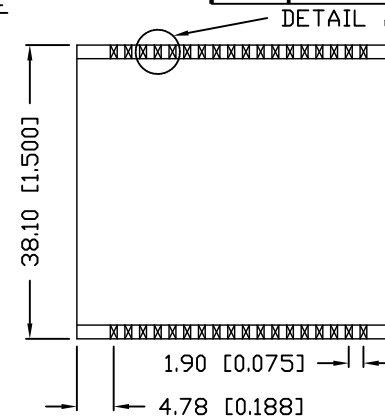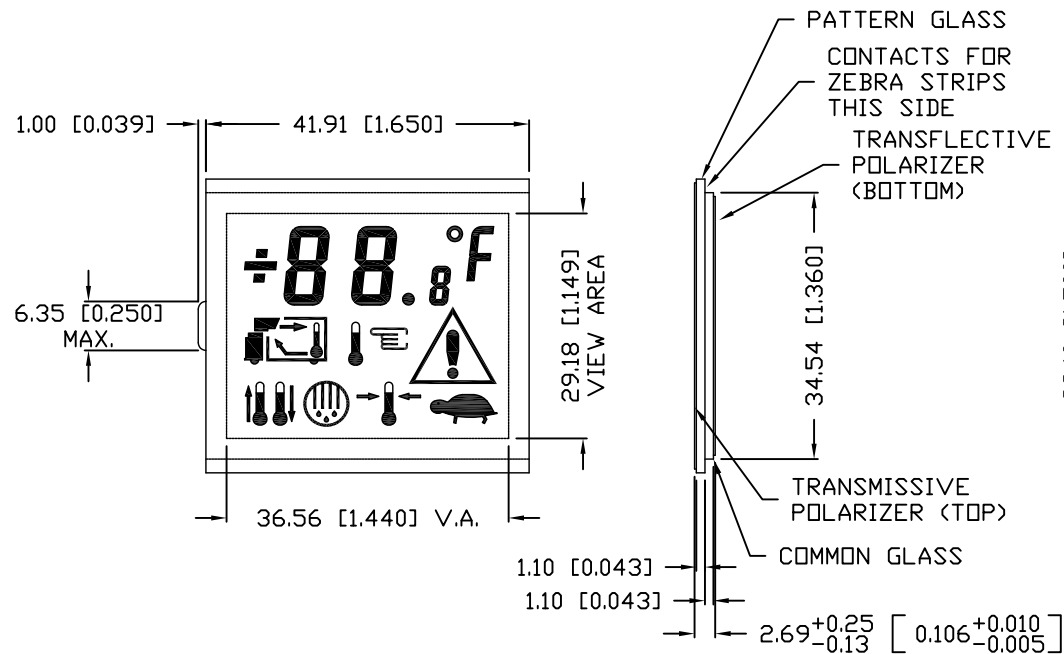

CUSTOMER PART #: 0842-0124-0000


*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

REV.	PART NUMBER
B	LCD-H201M40TF-1D
2 DIGIT CUSTOM LCD GLASS PANEL, TN, TRANSFLECTIVE, TOP VIEW, NO PINS, EXTENDED OPERATING TEMPERATURE.	

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.
RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw	
DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 3.27.00
JC			PAGE: 1 OF 2
			SCALE: N/A

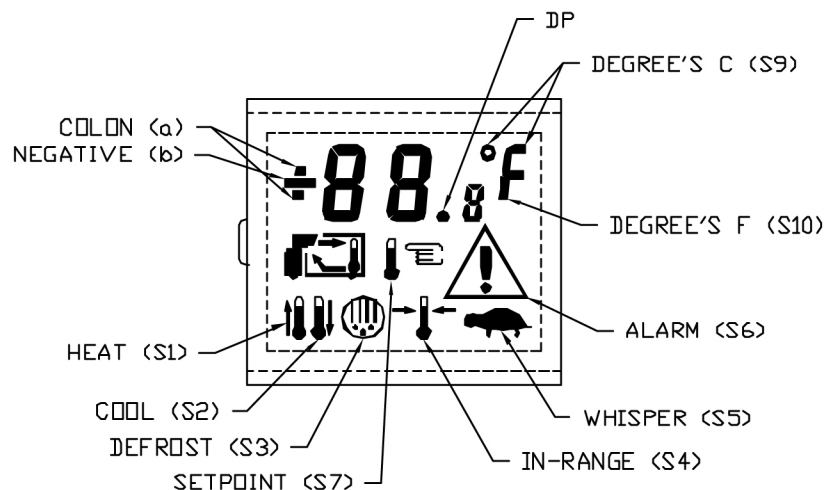




PIN	SEG.	PIN	SEG.	PIN	SEG.	PIN	SEG.
1	COM	10	S7	19	COM	28	2G
2	b	11	S4	20	3G,3F	29	1E
3	a	12	DP	21	3G	30	1D
4	X1	13	3B,3E	22	2E	31	1C
5	X2	14	3A,3D	23	2D	32	1B
6	S8	15	S5	24	2C	33	1A
7	S1	16	S6	25	2B	34	1F
8	S2	17	S10	26	2A	35	1G
9	S3	18	S9	27	2F	36	COM

ICONS

- a - COLON
 b - NEGATIVE
 S1 - HEAT
 S2 - COOL
 S3 - DEFROST
 S4 - IN RANGE
 S5 - WHISPER
 S6 - ALARM
 S7 - SETPOINT
 S8 - TRUCK
 S9 - DEGREE'S C
 S10 - DEGREE'S F
 X1 - DISCHARGE AIR
 X2 - RETURN AIR
 DP - DECIMAL POINT

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	NEUTRAL
VIEWING DIRECTION:	12:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	5.0V
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD:	STATIC
CONNECTION TYPE:	ELASTOMER

A DETAILS

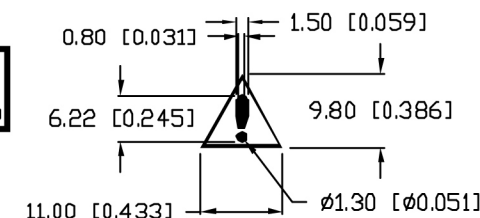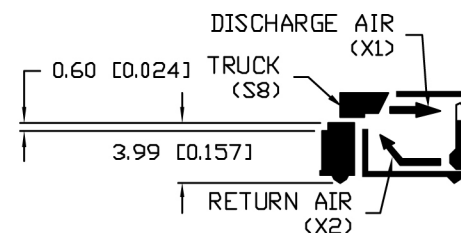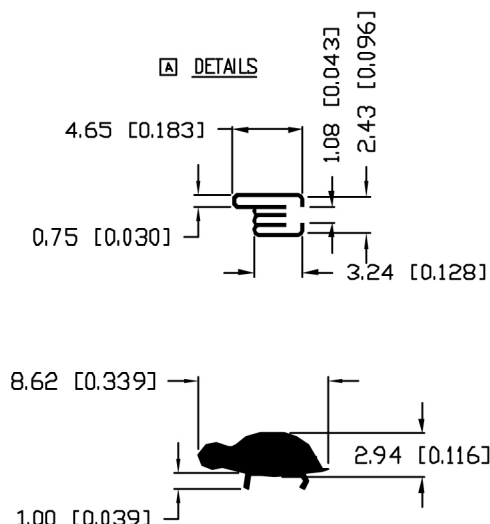

B NOTES:

1. LINE THICKNESS FOR S3, AND S8 IS 0.40mm.
2. LINE THICKNESS FOR S6 IS 0.50mm AND SIZE IS INCREASED TO AS IN DETAIL.
3. REDUCE SIZE OF SETPOINT (S7), HAND ONLY. (SEE DETAILS)
4. INCREASE SIZE OF TURTLE (S5). (SEE DETAILS)
5. INCREASE SIZE OF FRONT CABIN OF TRUCK (S8). (SEE DETAILS)

CUSTOMER PART #: 0842-0124-0000

*TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-H201M40TF-1D

2 DIGIT CUSTOM LCD GLASS PANEL, TN, TRANSFLECTIVE,
TOP VIEW, NO PINS, EXTENDED OPERATING TEMPERATURE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: (847) 359-2790
WEB: <http://www.lumex.com>

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 3-27-00

SA/DU

PAGE: 2 OF 2

SCALE: N/A