
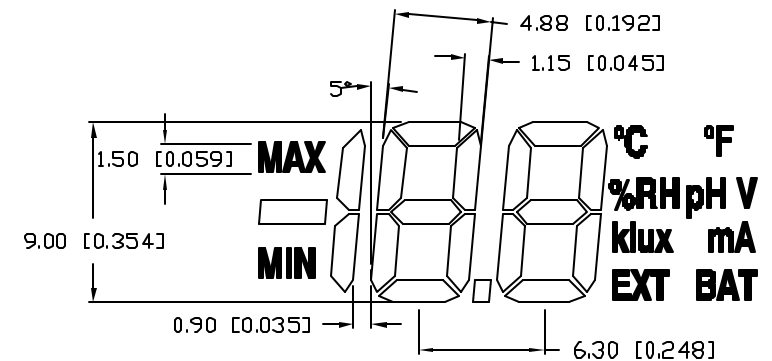


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H2X1M30TR-3REV.
P1

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.06.07

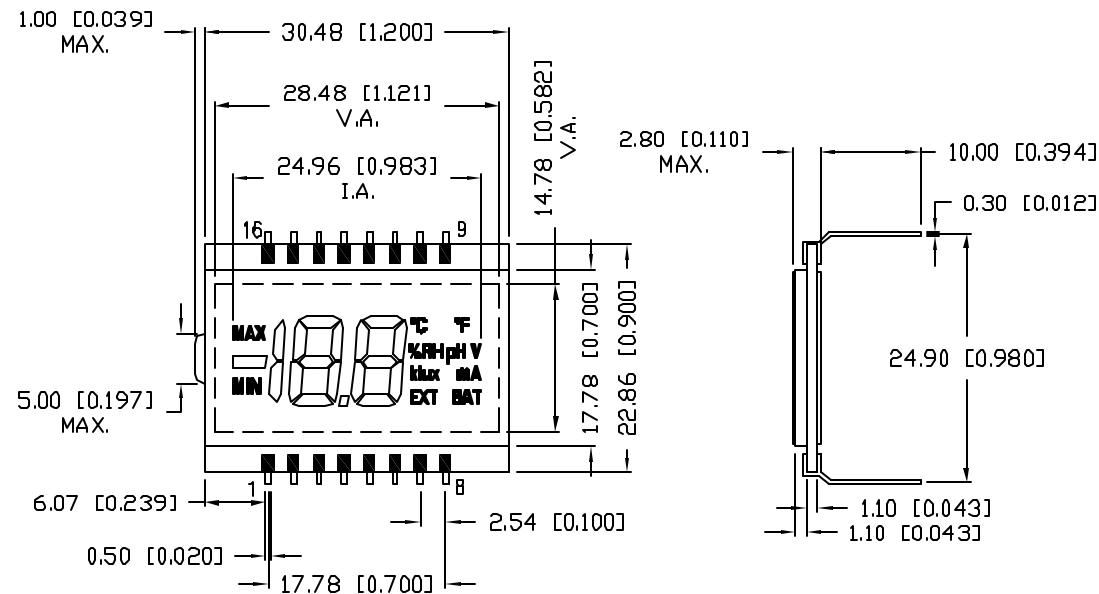

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	COM1	MIN	1BC	2E	DB2	3E	%RH	EXT	klux	pH	°C	3G	3F	2G	2F	✓
COM2	✓	MAX	-	2D	2C	3D	3C	BAT	mA	V	°F	3B	3A	2B	2A	COM2

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GREY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	2.8V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	16

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.
P1PART NUMBER
LCD-H2X1M30TR-3

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

2.5 DIGIT CUSTOM LCD PANEL, REFLECTIVE, 6:00 VIEW,
HIGH OPERATING TEMP, V_{op} = 2.8V, 1/2 DUTY, 16 PINS.

DRAWN BY:
JC

CHECKED BY:

APPROVED BY:

DATE: 11.28.05
PAGE: 1 OF 1
SCALE: N/A