
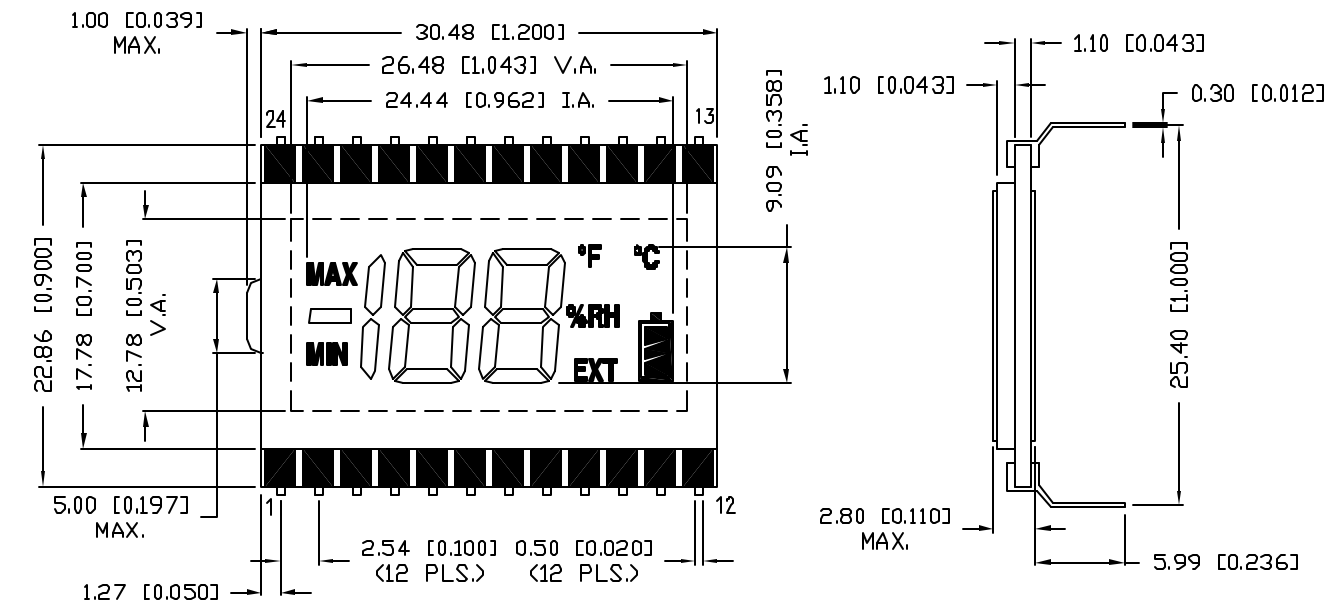


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H2X1M39TRREV.
AREV. E.C.N. NUMBER AND REVISION COMMENTS
A E.C.N. #11148.DATE
02.06.07

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD	STATIC
CONNECTION TYPE	24 PINS

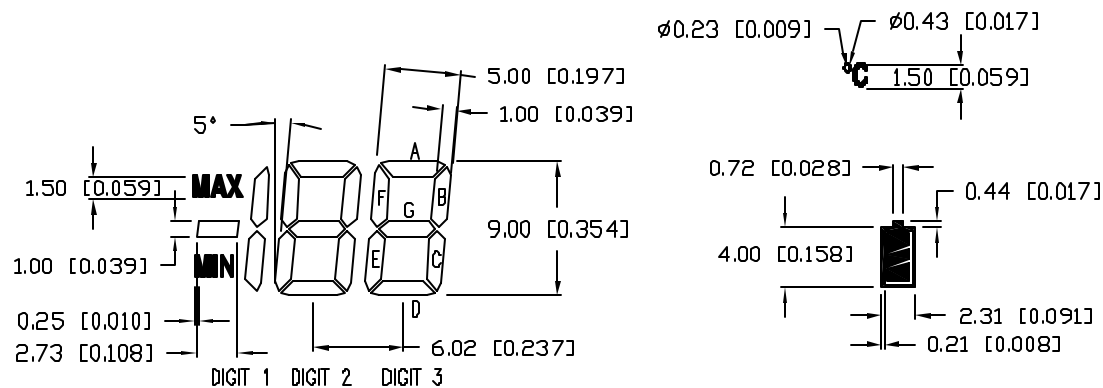

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
SEGMENT	-	MIN	1BC	2E	2D	2C	3E	3D	3C	EXT	%RH	BAT
PIN NO.	13	14	15	16	17	18	19	20	21	22	23	24
SEGMENT	°C	°F	3G	3B	3A	3F	2G	2B	2A	2F	MAX	COM



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.
APART NUMBER
LCD-H2X1M39TR2 1/2 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
-20°C TO 70°C OPERATING TEMPERATURE, 24 PINS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 3.19.02

PAGE: 1 OF 1

SCALE: N/A