
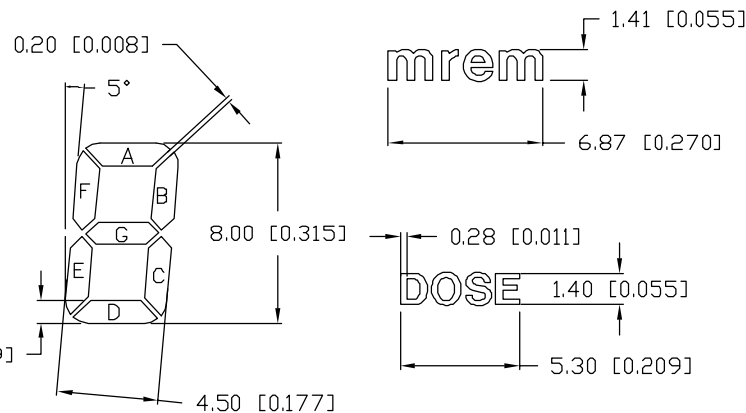
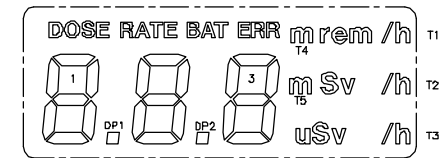
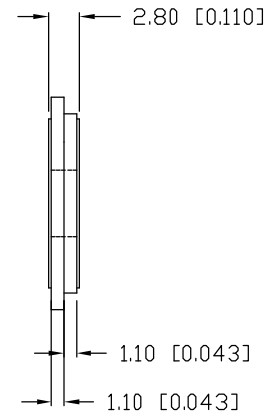


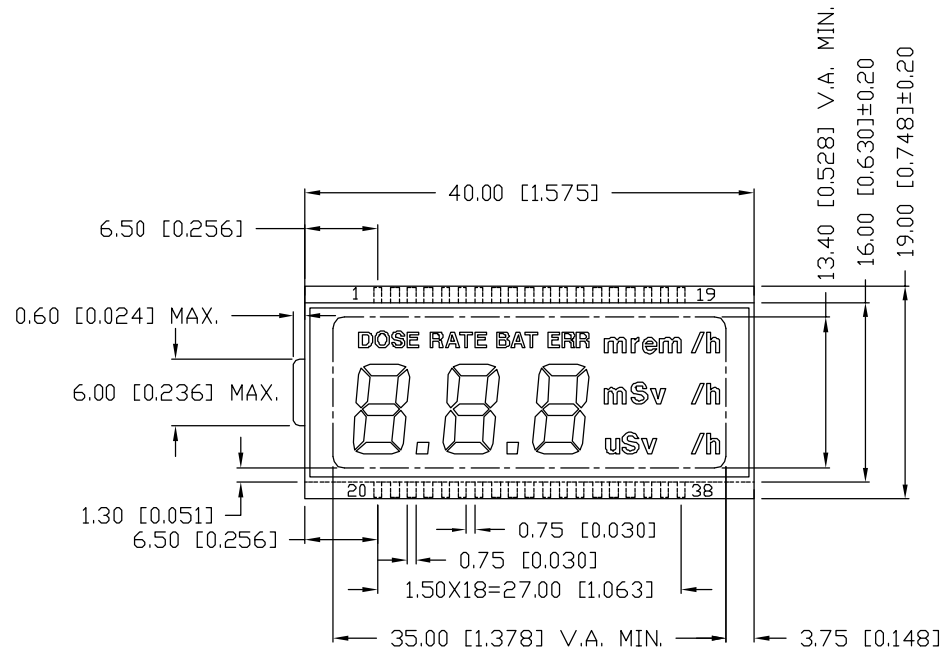

PIN NO.	1	2	3	4	5	6	7	8
SEGMENT	COM	1A	1B	DOSE	RATE	2A	2B	BAT
PIN NO.	9	10	11	12	13	14	15	16
SEGMENT	ERR	3A	3B	T5	SV	rem	T4	T1
PIN NO.	17	18	19	20	21	22	23	24
SEGMENT	T2	-	-	1F	1E	1D	1C	G1
PIN NO.	25	26	27	28	29	30	31	32
SEGMENT	DP1	2F	2E	2D	2C	2G	DP2	3F
PIN NO.	33	34	35	36	37	38		
SEGMENT	3E	3D	3C	3G	uSv	T3		

CHARACTERISTICS	
FLUID TYPE:	TN, POSITIVE
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	2.3V A.C.
OPERATING TEMP.	-30°C TO 80°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	ZEBRA STRIPS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-H301M32KR-D

0.315" CHARACTER HEIGHT, TRIPLE DIGIT

CUSTOM LED GLASS, TN, REFLECTIVE, HIGH TEMP.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE:

PAGE: 1 OF 1

SCALE: N/A