


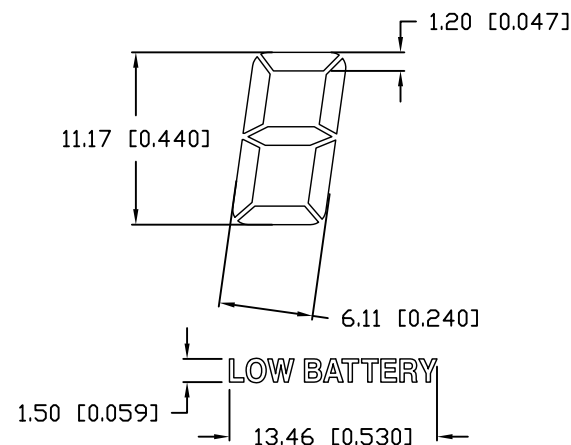


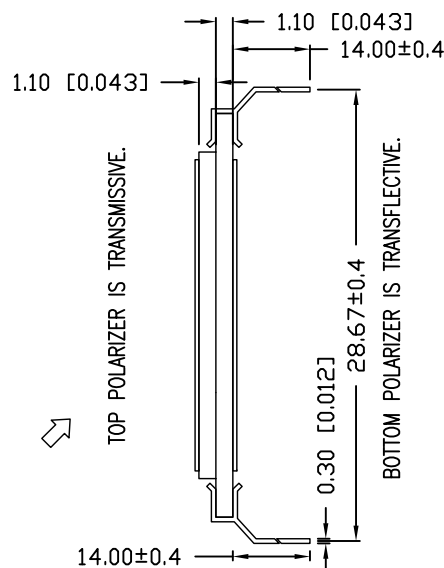

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.3 V A.C.
OPERATING TEMP.	-30°C TO 80°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/3 DUTY, 1/2 BIAS
CONNECTION TYPE	16 PINS

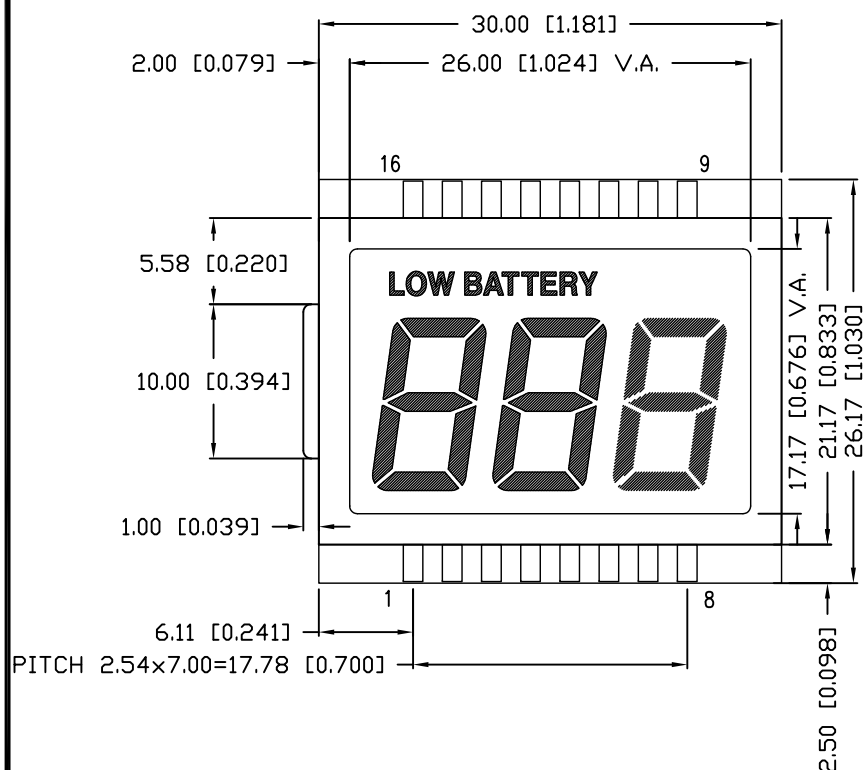

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	COM1								LOW	1A	1F	1B	1G	1E	1C	1D
COM2		COM2							/	2A	2F	2B	2G	2E	2C	2D
COM3			COM3						/	3A	3F	3B	3G	3E	3C	3D

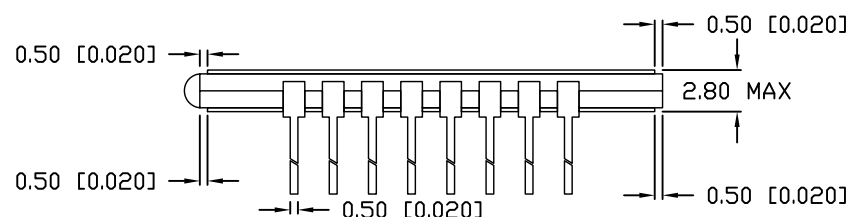

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-H301M50TF39134

3 DGT CUSTOM LCD PANEL, TN, TRANSFLECTIVE,
3.3 V, 1/3 DUTY 1/2 BIAS, 16 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 8.15.07

PAGE: 1 OF 1

SCALE: N/A