


LCD-H301M58TR/A




PRELIMINARY IN P/N DIR

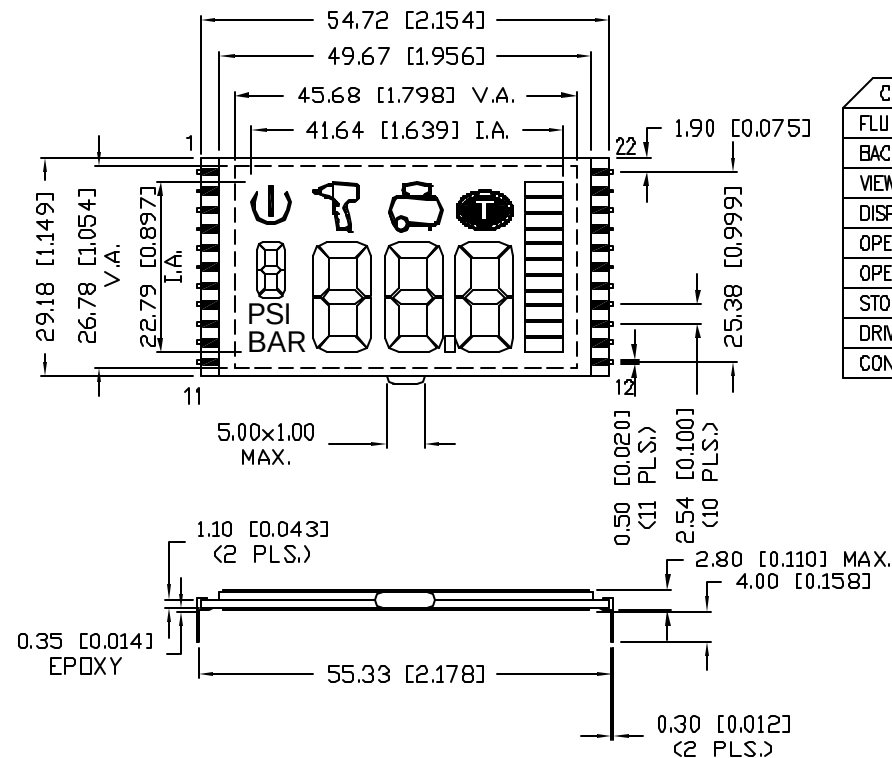


CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GREY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/3 DUTY, 1/3 BIAS
CONNECTION TYPE	22

DETAIL ICON VIEW


ICON LINE THICKNESS: 0.30mm

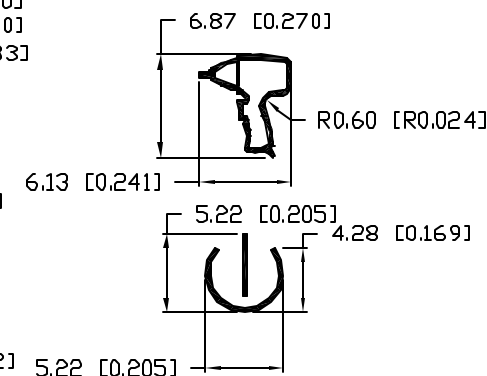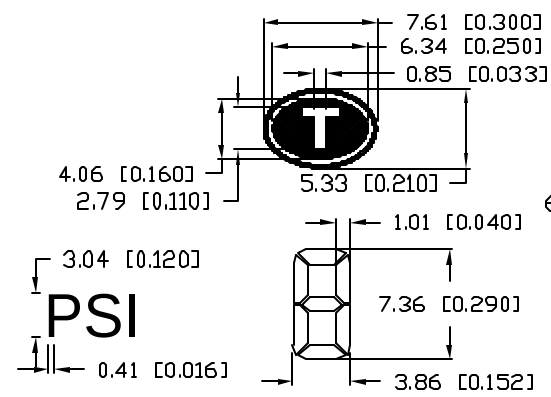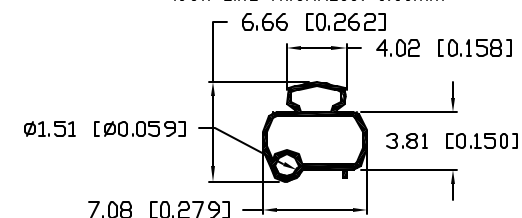

PIN	1	2	3	4	5	6	7	8	9	10	11
COM1	/	/	4C	4D	4E	1E	1D	1C	2E	2D	2C
COM2	/	/	4B	4G	4F	1F	1G	1B	2F	2G	2B
COM3	/	/	T1	4A	PSI	BAR	1A	T2	/	2A	T3
PIN	12	13	14	15	16	17	18	19	20	21	22
COM1	DP	3E	3D	3C	B1	B6	B5	B1	COM1	/	/
COM2	/	3F	3G	3B	B10	B7	B4	B2	/	COM2	/
COM3	/	/	3A	T4	B9	B8	B3	/	/	/	COM3

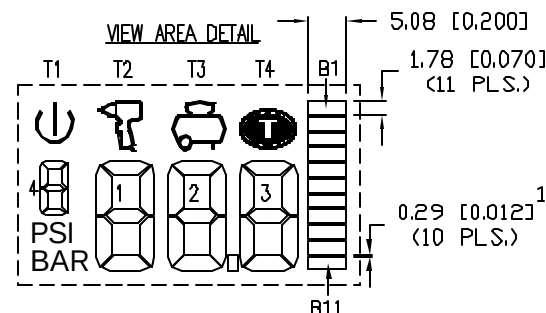

DIGIT DETAIL

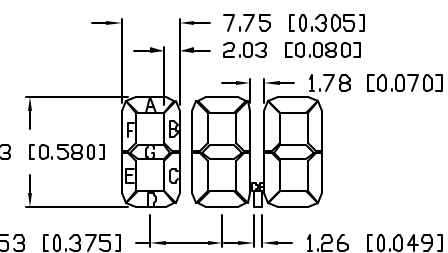

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-H301M58TR/A

3 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
1/2 DUTY, 1/2 BIAS, 5V, 16 PINS, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 11.15.04

PAGE: 1 OF 1

SCALE: N/A

JD