


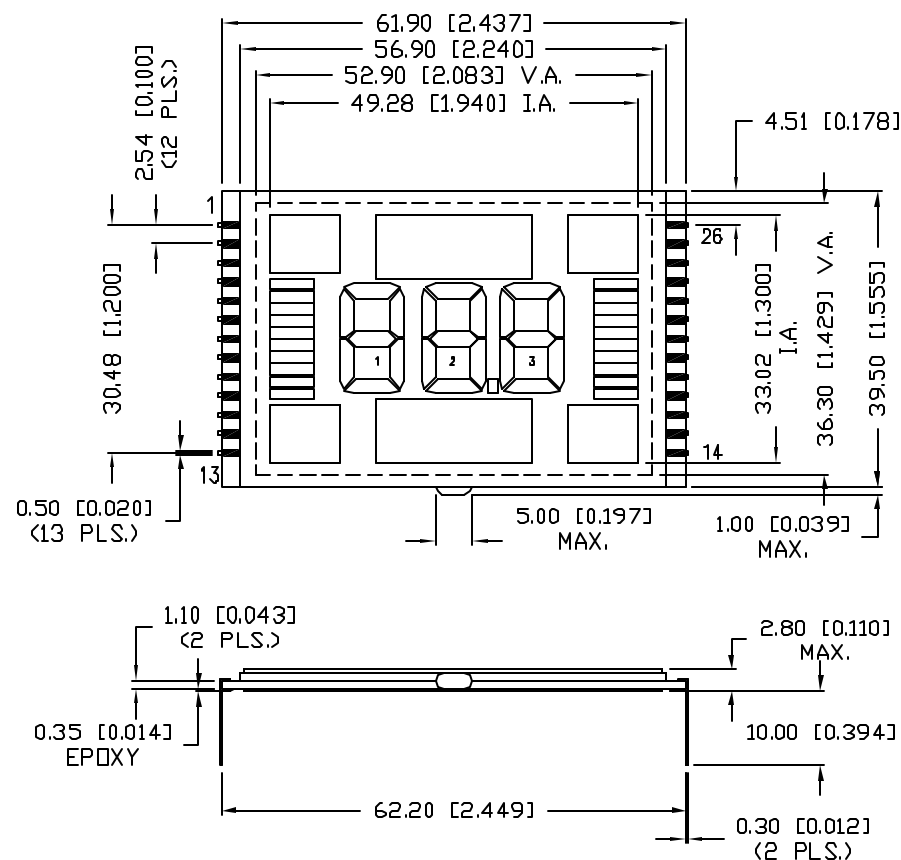

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GREY
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	26 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1	COM1	/	1A	1B	1C	S5	S6	BAR1	BAR3	BAR5	BAR7	BAR9	S4
COM2	/	COM2	1F	1G	1E	1D	S1	BAR2	BAR4	BAR6	BAR8	BAR10	2D
PIN NO.	14	15	16	17	18	19	20	21	22	23	24	25	26
COM1	BAR12	BAR14	BAR16	BAR18	BAR20	S3	S3	3B	3A	S2	2A	2B	2C
COM2	BAR11	BAR13	BAR15	BAR17	BAR19	3D	3E	3C	3F	DP	2F	2G	2E

Pb

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.
P1PART NUMBER
LCD-H301M75TF-1

3 DIGIT CUSTOM LCD PANEL, TN, TRANSFLECTIVE,
1/2 DUTY, 1/2 BIAS, 5V, 26 PINS, 12.00 VIEW.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JD


CHECKED BY:

APPROVED BY:



DATE: 8.16.04

PAGE: 1 OF 2

SCALE: N/A

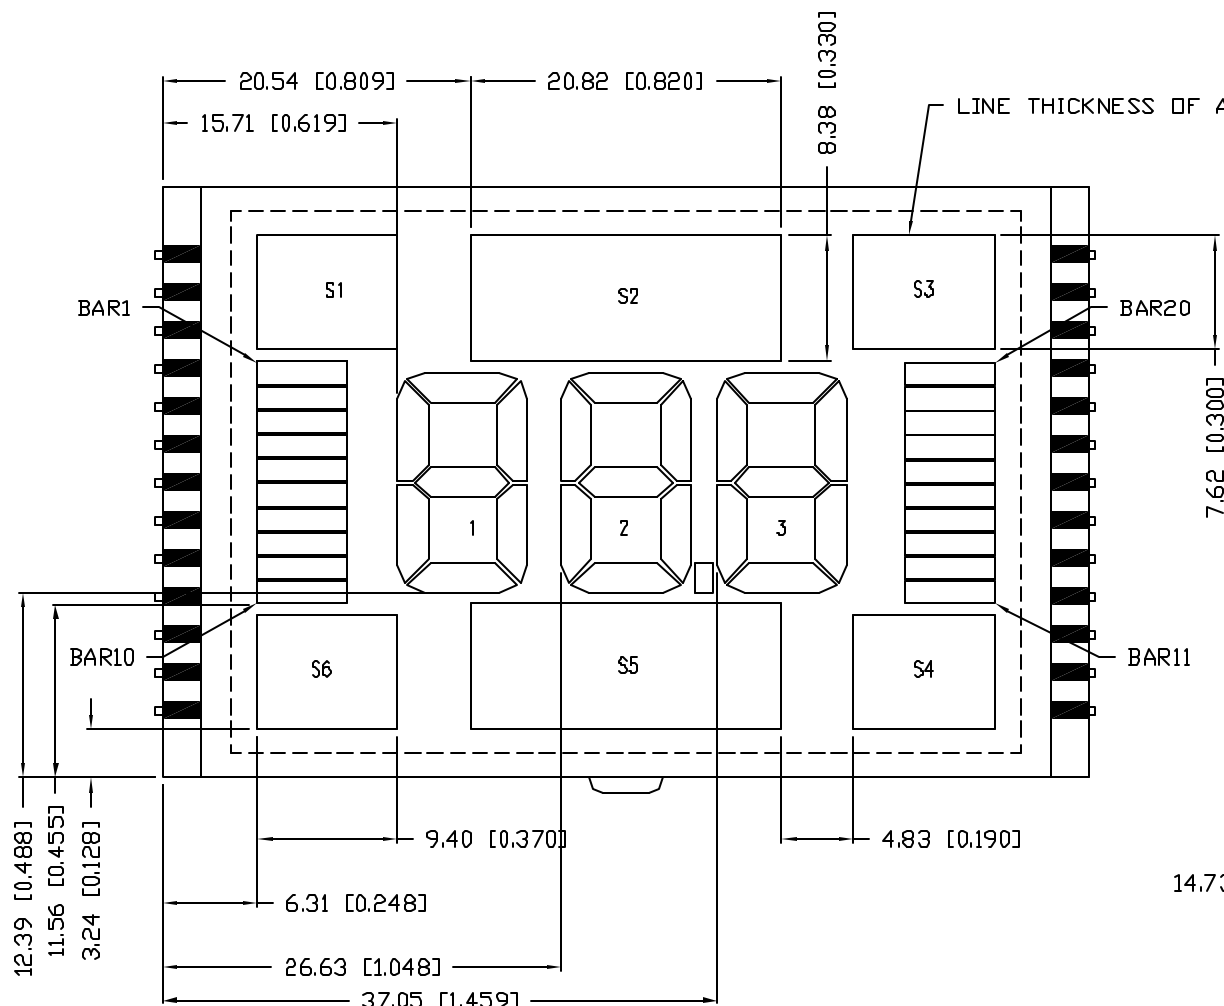

LINE THICKNESS OF ALL BOXES = 0.10mm

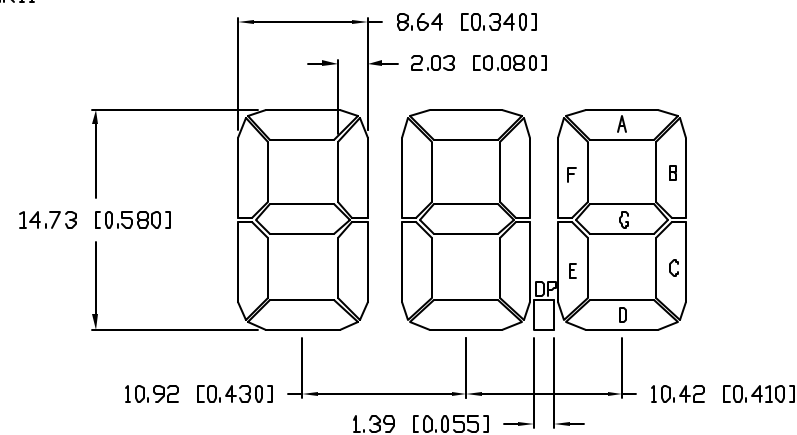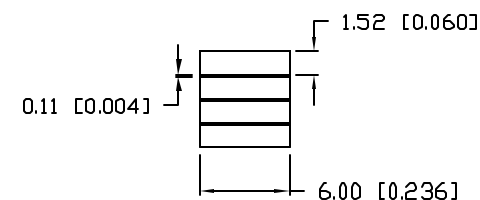

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.
P1PART NUMBER
LCD-H301M75TF-1

3 DIGIT CUSTOM LCD PANEL, TN, TRANSFLECTIVE,
1/2 DUTY, 1/2 BIAS, 5V, 26 PINS, 12:00 VIEW.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 8.16.04

PAGE: 2 OF 2

SCALE: N/A