UNCONTROLLED DOCUMENT


SC:0.50

PART NUMBER

LCD-H302M16TR

PRELIMINARY IN P/N DIR

REV.

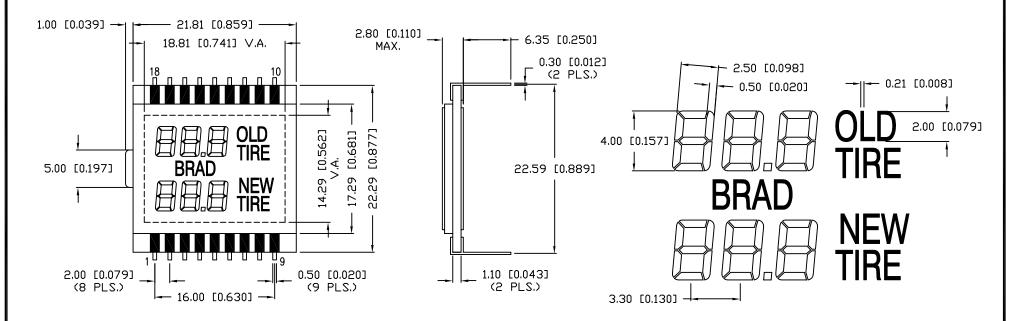

| CHARACTERISTICS | |
|--------------------|--------------------|
| FLUID TYPE: | TN |
| BACKGROUND COLOR: | GRAY |
| VIEWING DIRECTION: | 6:00 |
| DISPLAY MODE: | REFLECTIVE |
| OPERATING VOLTAGE: | 5.0V A.C. |
| OPERATING TEMP. | -30°C TO 80°C |
| STORAGE TEMP. | -40°C TO 85°C |
| DRIVING METHOD: | 1/4 DUTY, 1/3 BIAS |
| CONNECTION TYPE: | 18 PINS |

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD

REV.

PART NUMBER LCD-H302M16TR

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC.. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw CHECKED BY: APPROVED BY: DATE: DRAWN BY:

> PAGE: 1 OF 1 SCALE: N/A

10.16.03