
UNCONTROLLED DOCUMENT

PART NUMBER	LCD-H302M56TR-1 REV.	Α
DATE	E.C.N. NUMBER AND REVISION COMMENTS	REV.
02.06.07	E.C.N. #11148.	Α



CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	NEUTRAL
VIEWING DIRECTION:	12:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	5V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD:	1/4 DUTY, 1/3 BIAS.
CONNECTION TYPE:	18 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT

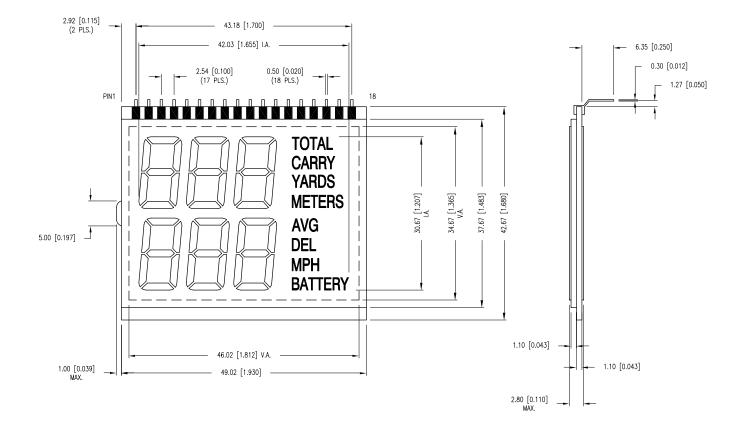

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM

6 DIGIT CUSTOM LCD PANEL, TN, REFL 12:00 VIEW, 1/4 DUTY, 1/3 BIAS.


THE

	THE OF ENTIRE WITH THE WITHOUT HOUSE DOE TO HER WITHOUT HOUSE OF THOUSENING THE WITHOUT HER WITHOUT HOUSE OF THE W	
	CONFIDENTIAL INFORMATION	
Ε	INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL	
	KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.	

OND/VCO/V//IOLLLD DOCO/WL/V/										
DATE:	05.10.05	DRAWN BY: JC								
PAGE:	1 OF 2	CHKD BY: SA								
SCALE:	N/A	APRVD BY: JD								
UNIT:	mm [INCH]	Po A								

UNCONTROLLED DOCUMENT

PART NUMBER	LCD-H302M56TR-1	REV.	Α
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
	SEE PAGE 1		

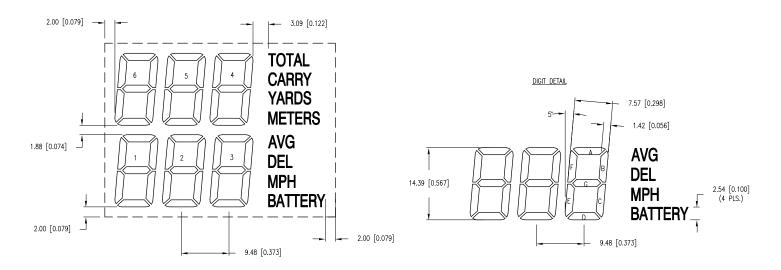

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1				СОМ1		6A		5A		4A	TOTAL	AVG	3A		2A		1A	
COM2			COM2		6F	6B	5F	5B	4F	4B	CARRY	DEL	3B	3F	2B	2F	1B	1F
сомз		сомз			6G	6C	5G	5C	4G	4C	YARDS	MPH	3C	3G	2C	2G	1C	1G
COM4	COM4				6E	6D	5E	5D	4E	4D	METERS	BATTERY	3D	3E	2D	2E	1D	1E

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION // VCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM 6 DIGIT CUSTOM LCD PANEL, TN, REFL 12:00 VIEW, 1/4 DUTY, 1/3 BIAS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL REFER ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

IJ	31011									
	DATE:	05.10.0	05	DRAWN BY:	JC					
	PAGE:	2 OF	2	CHKD BY:	SA					
	SCALE:	N/A		APRVD BY:	JD					
	UNIT:	mm [IN	CH]	P _P A						