

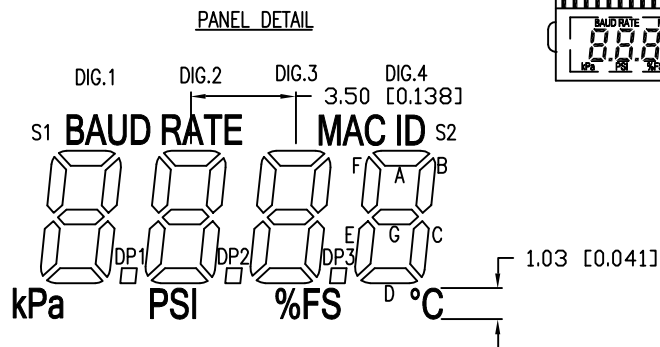


LCD-H401M14WF/A

PRELIMINARY IN P/N DIR

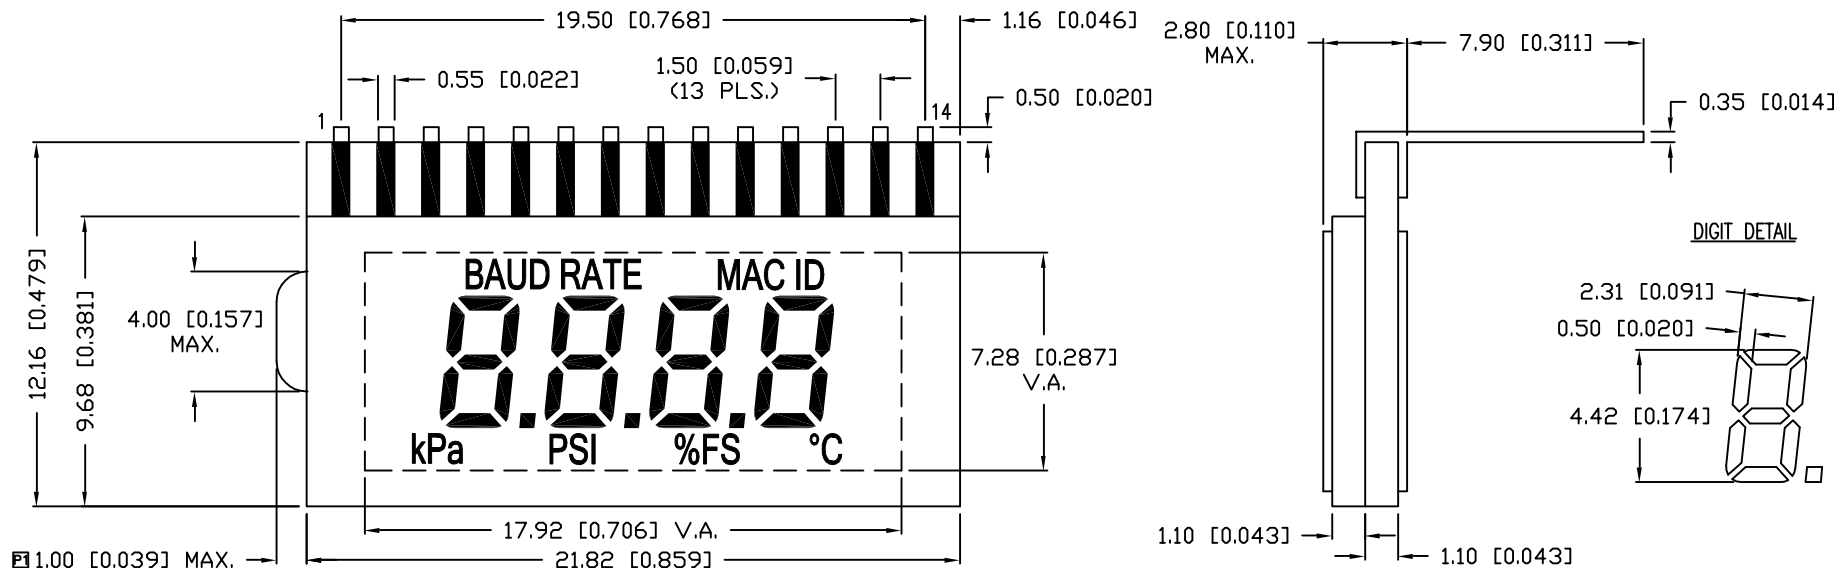

ACTUAL SIZE



CHARACTERISTICS	
FLUID TYPE	FSTN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	14 PINS

PIN	1	2	3	4	5	6	7
COM0	COM0	/	/	/	1D	DP1	2D
COM1	/	COM1	/	/	1E	1C	2E
COM2	/	/	COM2	/	1G	1B	2G
COM3	/	/	/	COM3	1F	1A	2F
PIN	8	9	10	11	12	13	14
COM0	DP2	3D	DP3	4D	/	kPa	S1
COM1	2C	3E	3C	4E	4C	PSI	S2
COM2	2B	3G	3B	4G	4B	%FS	/
COM3	2A	3F	3A	4F	4A	°C	/

NOTES:

- "BAUD RATE" IS ONE SEGMENT CALLED S1.
- "MAC ID" IS ONE SEGMENT CALLED S2.



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-H401M14WF/A

FOUR DIGIT 0.17" SEVEN SEGMENT, CUSTOM LCD PANEL,
FSTN, TRANSFLECTIVE, 0°C TO 50°C, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 03.11.08

PAGE: 1 OF 1

SCALE: N/A