

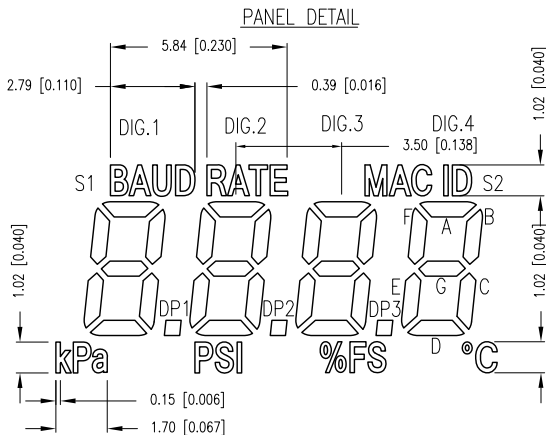



PART NUMBER	LCD-H401M14WM/A	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
09.18.14	E.C.N. #11926.		A

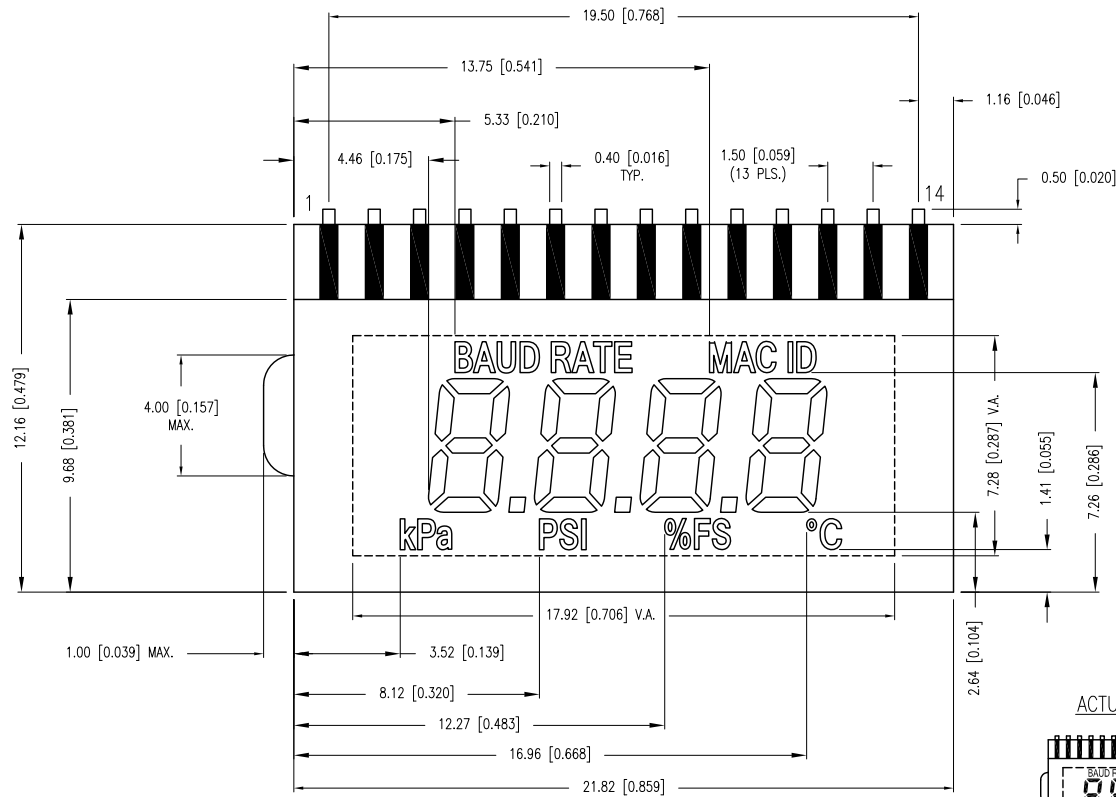

ACTUAL SIZE



CHARACTERISTICS	
FLUID TYPE	POSITIVE
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSMISSIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	14 PINS

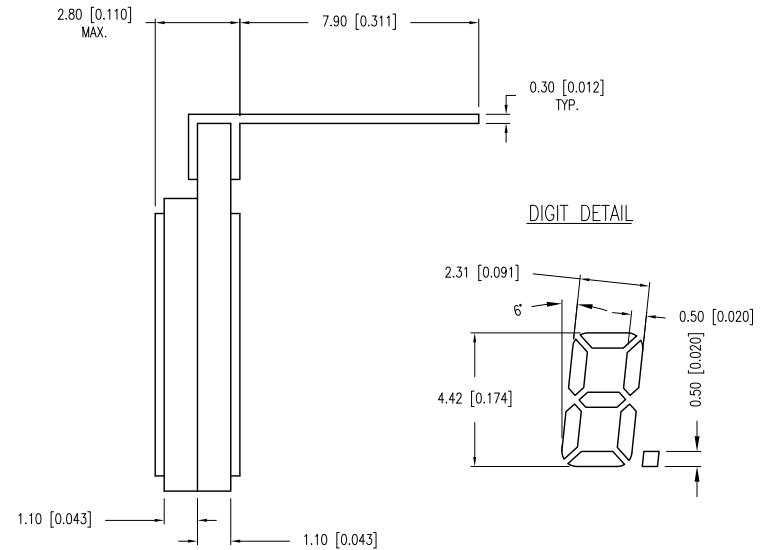

NOTES:

- "BAUD RATE" IS ONE SEGMENT CALLED S1.
- "MAC ID" IS ONE SEGMENT CALLED S2.

PIN	1	2	3	4	5	6	7
COM0	COM0	/	/	/	1D	DP1	2D
COM1	/	COM1	/	/	1E	1C	2E
COM2	/	/	COM2	/	1G	1B	2G
COM3	/	/	/	COM3	1F	1A	2F
PIN	8	9	10	11	12	13	14
COM0	DP2	3D	DP3	4D	/	kPa	S1
COM1	2C	3E	3C	4E	4C	PSI	S2
COM2	2B	3G	3B	4G	4B	%FS	/
COM3	2A	3F	3A	4F	4A	°C	/

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION