

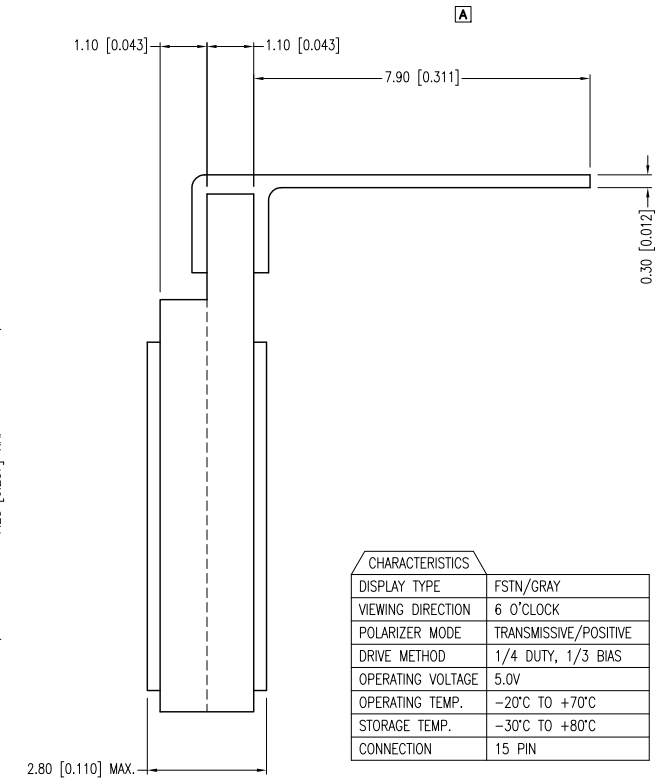
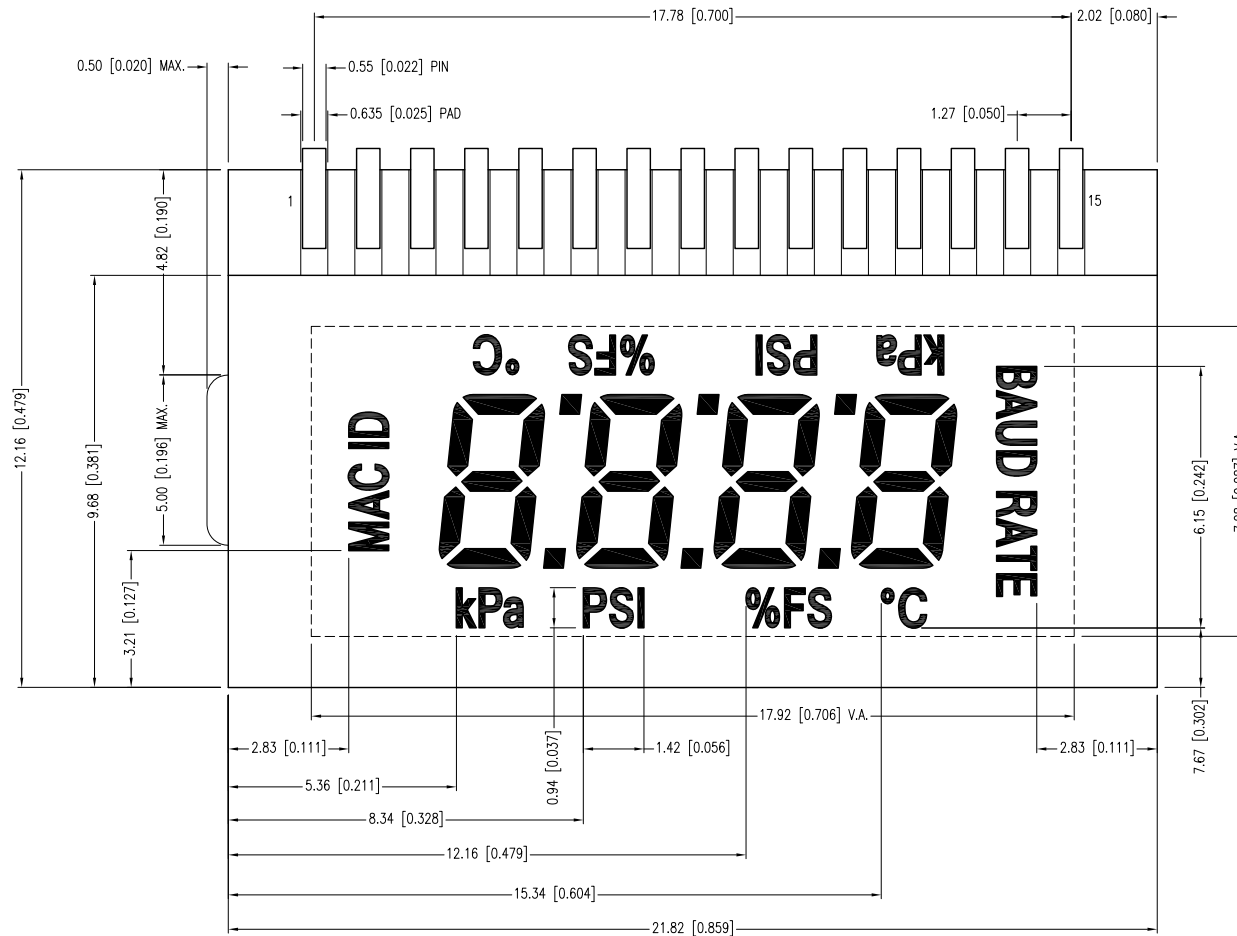
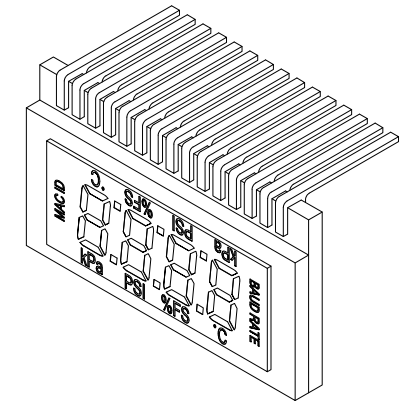


PART NUMBER	LCD-H401M14WM/E	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
09.11.14	E.C.N. #11926.		A



CHARACTERISTICS	
DISPLAY TYPE	FSTN/GRAY
VIEWING DIRECTION	6 O'CLOCK
POLARIZER MODE	TRANSMISSIVE/POSITIVE
DRIVE METHOD	1/4 DUTY, 1/3 BIAS
OPERATING VOLTAGE	5.0V
OPERATING TEMP.	-20°C TO +70°C
STORAGE TEMP.	-30°C TO +80°C
CONNECTION	15 PIN

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COM1				COM1	1A	X1	DP6	2A	X2	DP5	3A	X3	DP4	4A	X4
COM2			COM2		1F	1B	DP1	2F	2B	DP2	3F	3B	DP3	4F	4B
COM3	COM3				1E	1G	X5	2E	2G	X6	3E	3G	X8	4E	4G
COM4	COM4				1D	1C	S2	2D	2C	X7	3D	3C	S1	4D	4C

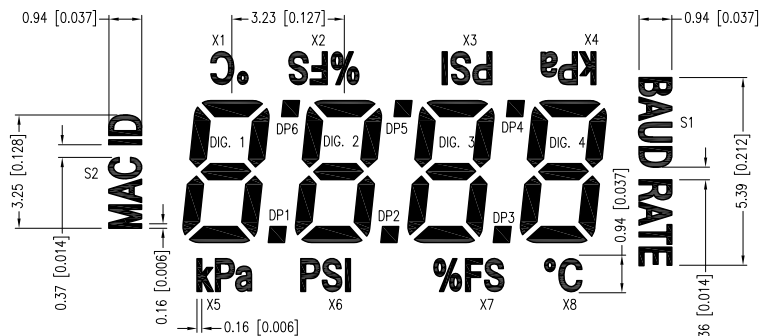

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= $\begin{matrix} +\text{DECIMAL PRECISION} \\ -0.00 \end{matrix}$ MAX= $\begin{matrix} +0.00 \\ -\text{DECIMAL PRECISION} \end{matrix}$

UNCONTROLLED DOCUMENT



425 N. GARY AVE.
CAROL STREAM, IL 60188-4900
PHONE: +1.800.278.5666
FAX: +1.630.315.2152
WEB: WWW.LUMEX.COM
MEMBER OF ITW PHOTONICS GROUP

4 DIGIT 7 SEGMENT DISPLAY, CUSTOM LCD PANEL FSTN, TRANSMISSIVE, 6:00 VIEW.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	07.27.11	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	SS
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Ⓟ