

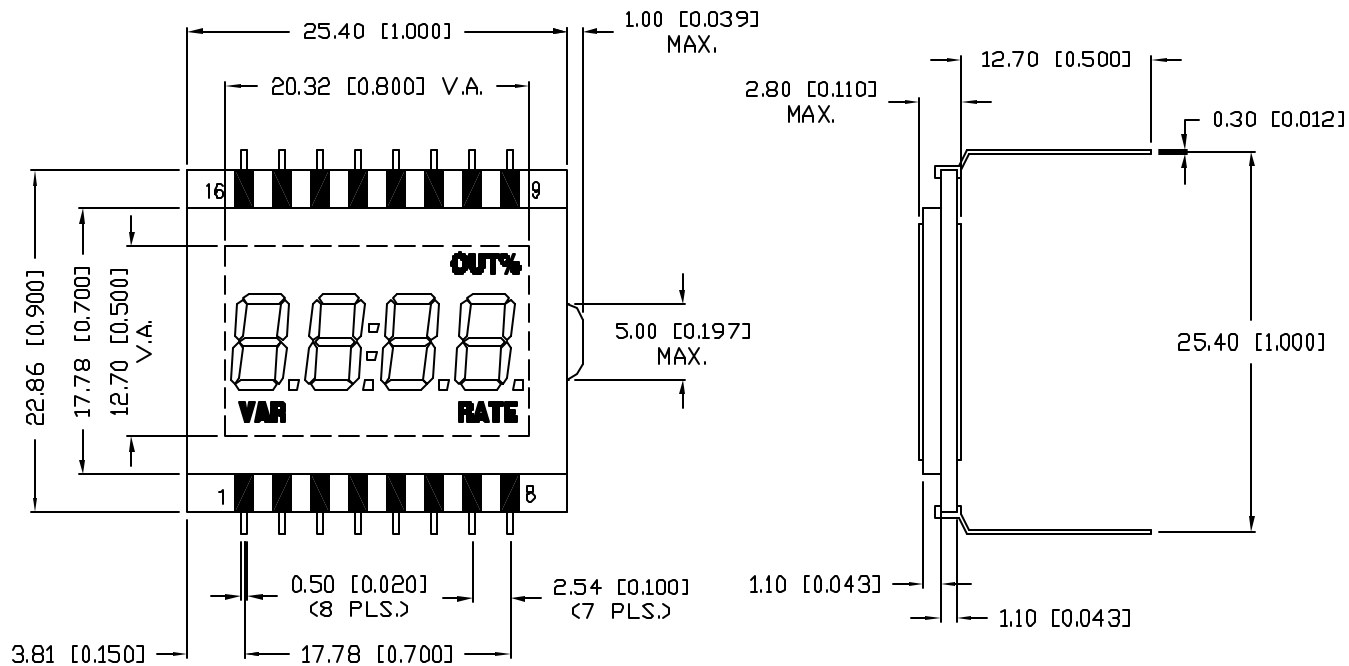




NOTES:

1. DIAGONAL MARK TO BE PLACED ON FRONT PROTECTIVE FILM.

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	12:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	3.0VAC
OPERATING TEMP.	-30°C TO +75°C
STORAGE TEMP.	-40°C TO +80°C
DRIVING METHODE:	1/3 DUTY, 1/3 BIAS
CONNECTION TYPE:	16 PINS

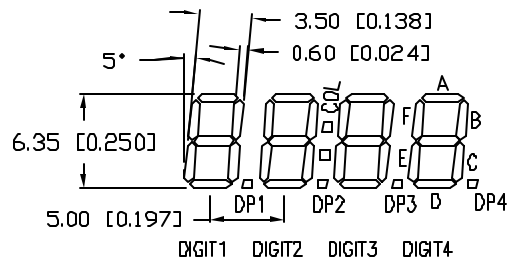

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM0	COM0	-	-	2F	2A	2B	4F	4A	-	4B	3B	3A	3F	1B	1A	1F
COM1	-	COM1	-	2E	2G	2C	4E	4G	-	4C	3C	3G	3E	1C	1G	1E
COM2	-	-	COM2	DP1	2D	DP2	RATE	4D	DP4	OUT%	DP3	3D	-	COLON	1D	VAR

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.

PART NUMBER

LCD-H401M25KR-1

0.25" 4 DIGIT CUSTOM LCD GLASS,
3.0VAC TN, REFLECTIVE, 16 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 7.24.07

PAGE: 1 OF 1

SCALE: N/A



UNCONTROLLED DOCUMENT