

UNCONTROLLED DOCUMENT

PART NUMBER

LCD-H401M26TMN-D

REV.


A

REV.	E.C.N. NUMBER AND REVISION COMMENTS
------	-------------------------------------


DATE _____

A	E.C.N. #11148.
---	----------------

02.07.07

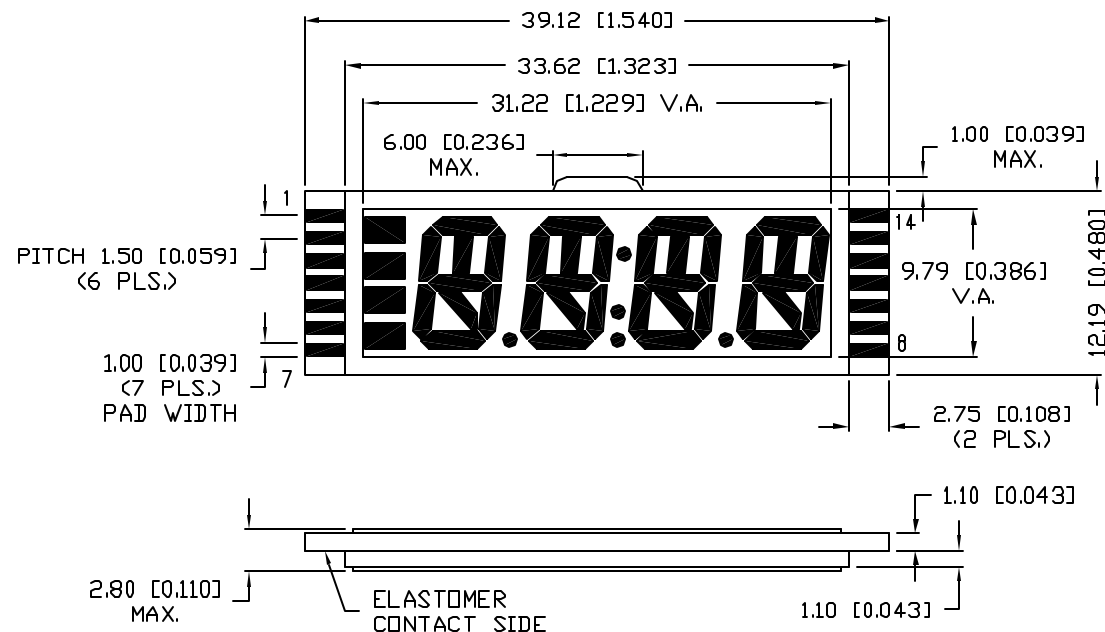

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	BLACK
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSMISSIVE NEGATIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-10°C TO +60°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/5 DUTY, 1/3.2 BIAS
CONNECTION TYPE	ELASTOMER

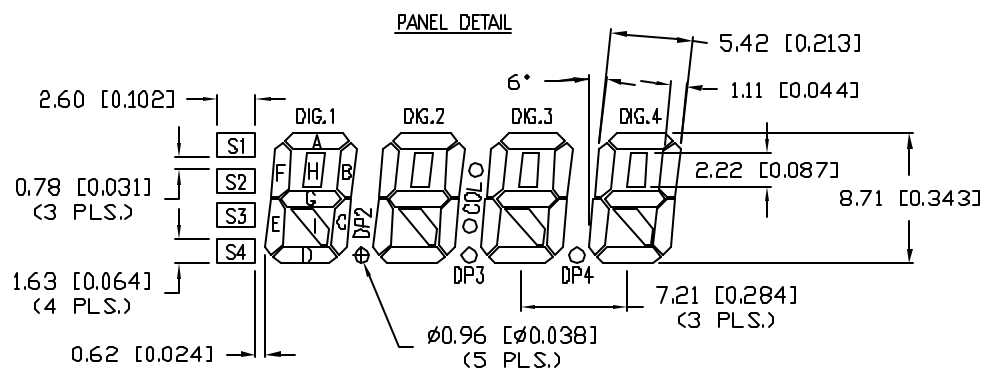

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
COM1	COM1	/	/	/	/	/	1H	1A	2H	2A	3H	3A	4H	4A
COM2	/	COM2	/	/	/	S1	1F	1B	2F	2B	3F	3B	4F	4B
COM3	/	/	COM3	/	/	S2	1G	1I	2G	2I	3G	3I	4G	4I
COM4	/	/	/	COM4	/	S3	1E	1C	2E	2C	3E	3C	4E	4C
COM5	/	/	/	/	COM5	S4	1D	DP2	2D	DP3	3D	DP4	4D	CP

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

A

LCD-H401M26TMN-D

0.34" CHARACTER HEIGHT, 4 DIGIT CUSTOM LCD PANEL,
TN, TRANSMISSIVE NEGATIVE IMAGE, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 11.14.00

JC

PAGE: 1 OF 1
SCALE: N/A