



UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H401M34TMN-1DREV.
P3

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

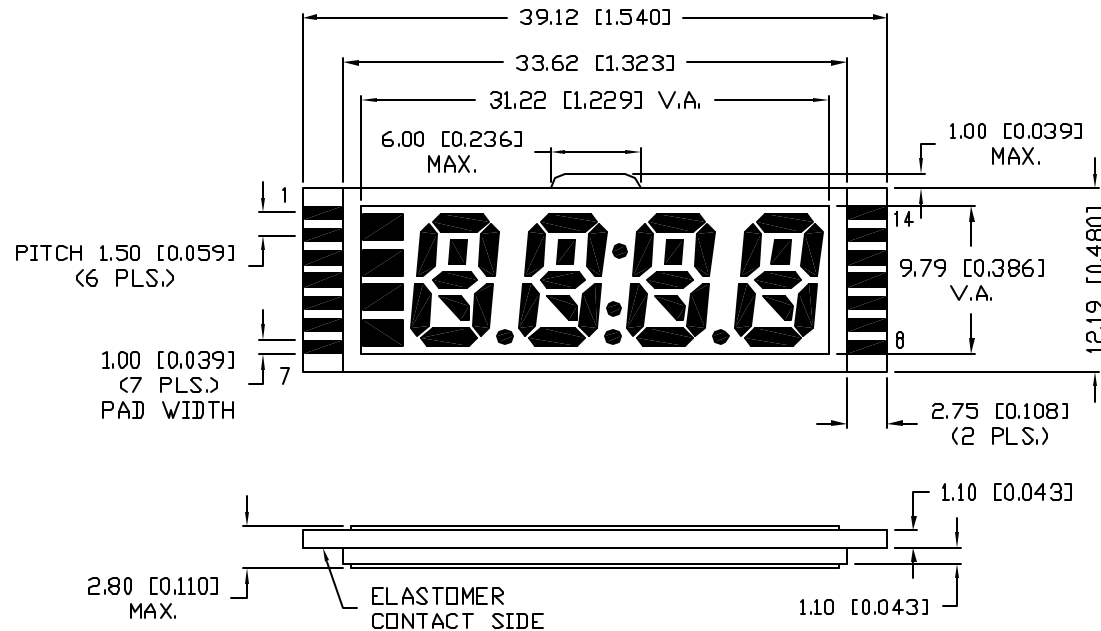

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	BLACK
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSMISSIVE NEGATIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-10°C TO +60°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/6 DUTY, 1/3.4 BIAS
CONNECTION TYPE	ELASTOMER

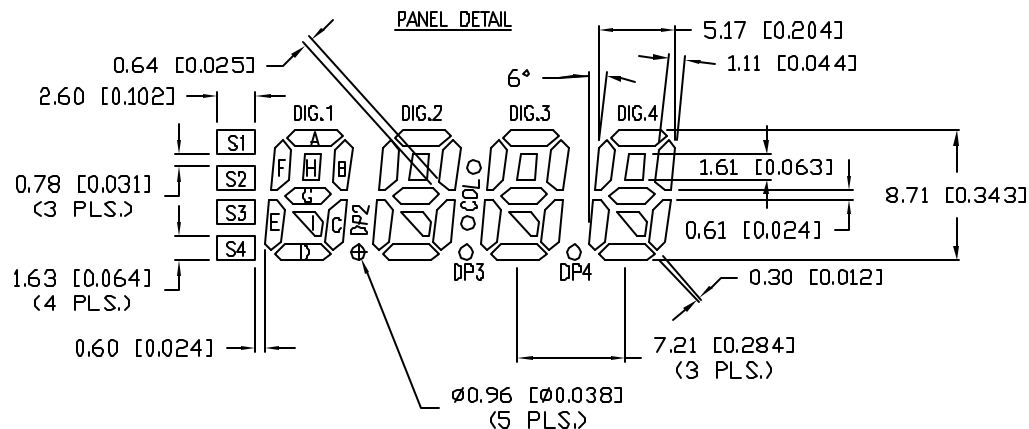

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
COM1	COM1	/	/	/	/	/	DP2	1D	1E	1C	1G	1B	1F	1A
COM2	/	COM2	/	/	/	/	DP3	2D	2E	2C	2G	2B	2F	2A
COM3	/	/	COM3	/	/	/	DP4	3D	3E	3C	3G	3B	3F	3A
COM4	/	/	/	COM4	/	/	COL	4D	4E	4C	4G	4B	4F	4A
COM5	/	/	/	/	COM5	/	4I	2I	3H	2H	4H	1I	3I	1H
COM6	/	/	/	/	/	COM6	/	S1	/	S2	/	S3	/	S4

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.
P3PART NUMBER
LCD-H401M34TMN-1D

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

0.34" CHARACTER HEIGHT, 4 DIGIT CUSTOM LCD PANEL,
TN, TRANSMISSIVE NEGATIVE IMAGE, 12:00 VIEW.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 11.22.00 PAGE: 1 OF 1 SCALE: N/A
-----------------	-------------	--------------	--

16

UNCONTROLLED DOCUMENT