
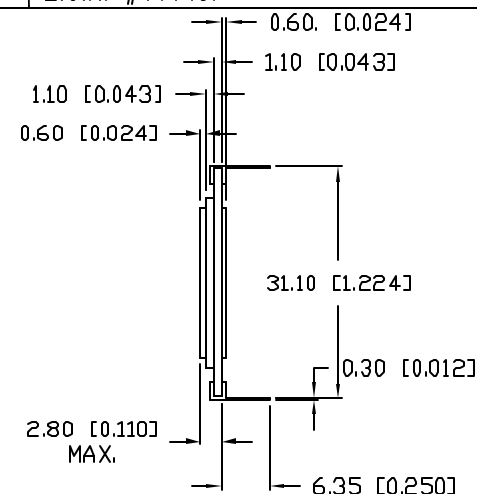


UNCONTROLLED DOCUMENT



PART NUMBER		REV.
LCD-H401M40TR/A-1		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

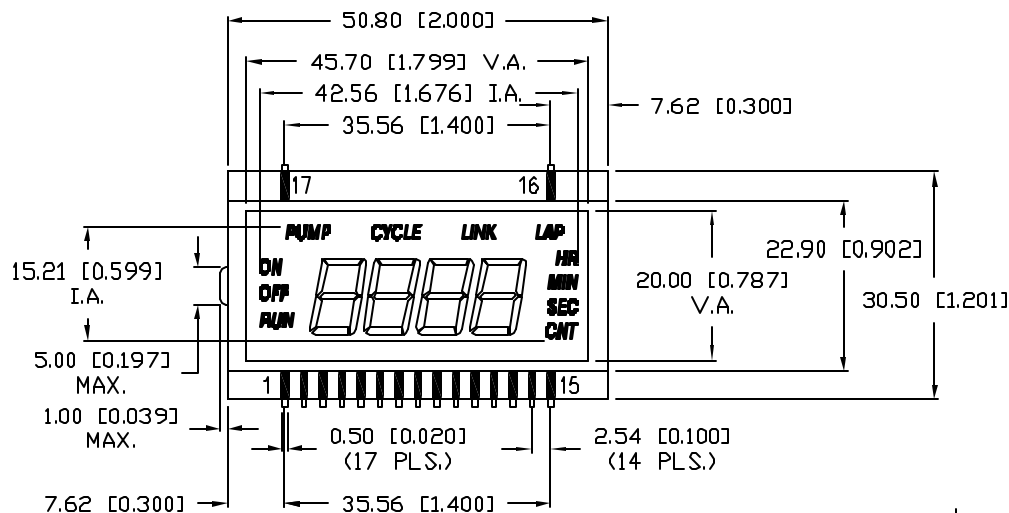

CHARACTERISTICS

FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	12:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	5.0V AC.
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 80°C
DRIVING METHODE:	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE:	17 PINS

PIN	1	2	3	4	5	6	7	8	9
COM1	ON	PUMP	1A	CYCLE	2A	LINK	3A	LAP	4A
COM2	OFF	1F	1B	2F	2B	3F	3B	4F	4B
COM3	RUN	1E	1C	2E	2C	3E	3C	4E	4C
COM4		1D	1C	2D	2C	3D	3C	4D	4C
PIN	1D	11	12	13	14	15	16	17	
COM1	HR	-	-	-	COM1	-	-	-	-
COM2	MIN	-	-	-	COM2	-	-	-	-
COM3	SEC	-	COM3	-	-	-	-	-	-
COM4	CNT	COM4	-	-	-	-	-	-	-

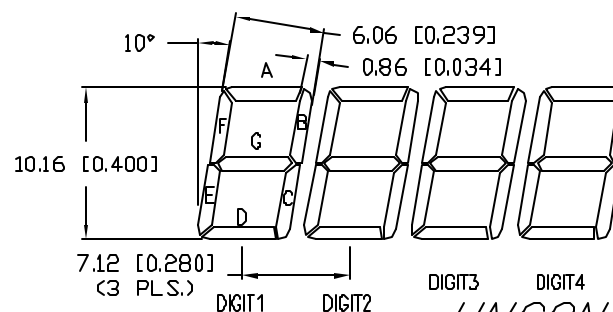

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-H401M40TR/A-1

4 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE, 1/4 DUTY,
HIGH OPERATING TEMPERATURE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 10.31.02

PAGE: 1 OF 1

SCALE: N/A