



UNCONTROLLED DOCUMENT

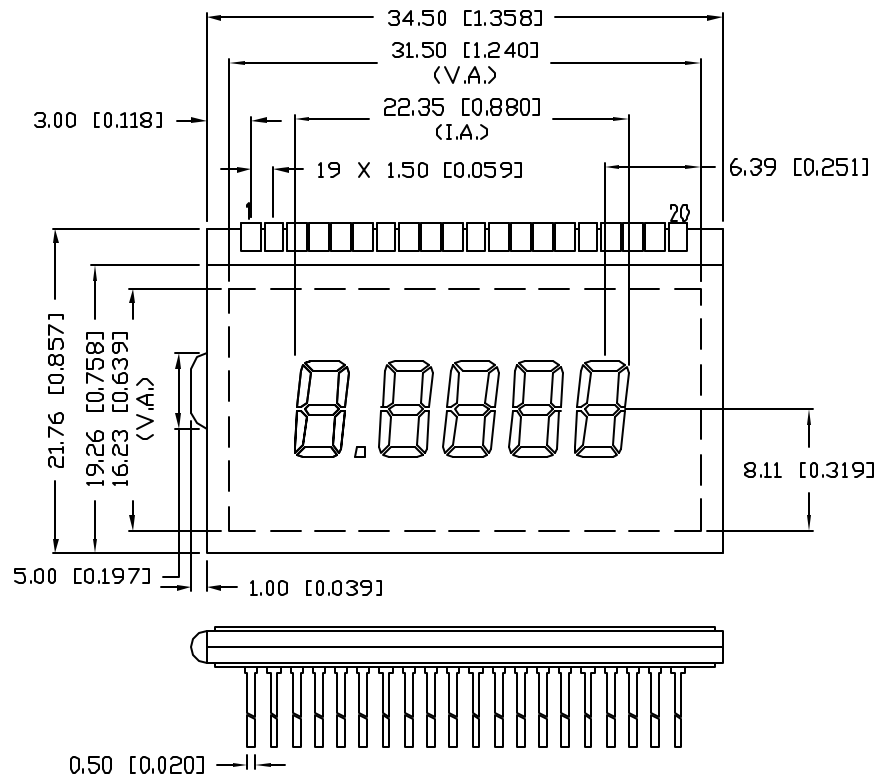


DIGIT DETAIL

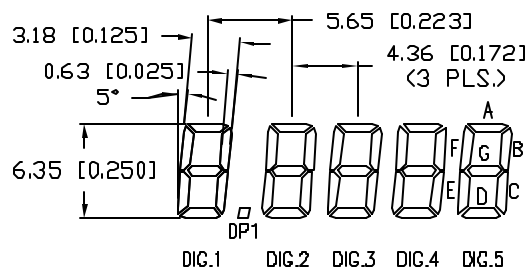

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	8:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 80°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	20 PINS

PART NUMBER		REV.
LCD-H501M24TR		P2
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE

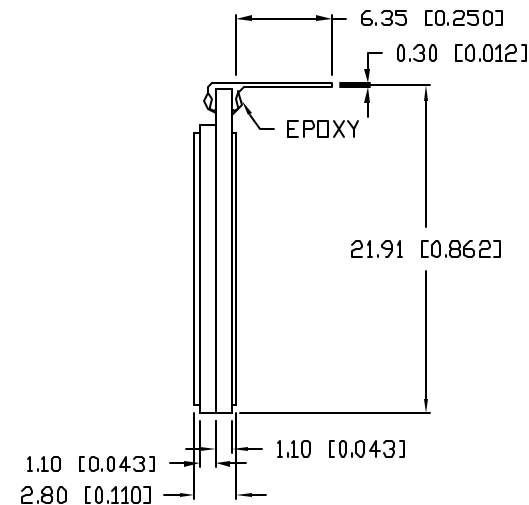

PIN	1	2	3	4	5	6	7	8	9	10
COM1		COM1	1F	1A	1B	2F	2A	2B	3F	3A
COM2	COM2		1E	1G	1C	2E	2G	2C	3E	3G
PIN	11	12	13	14	15	16	17	18	19	20
COM1	3B	4F	4A	4B	5F	5A	5B	5D	3D	DP
COM2	3C	4E	4G	4C	5E	5G	5C	4D	2D	1D

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+0.00/-0.00 DECIMAL PRECISION MAX.=+0.00/-0.00 DECIMAL PRECISION

REV.

P2

PART NUMBER

LCD-H501M24TR

5 DIGIT CUSTOM LCD PANEL, TN REFLECTIVE, 1/2 DUTY
1/2 BIAS, HIGH OPERATING TEMP.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



UNCONTROLLED DOCUMENT



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 8.15.05
JC			PAGE: 1 OF 1
			SCALE: N/A