


NOTE:

FRONT POLARIZER TO BE EXTENDED ALL THE WAY TO THE EDGE OF THE GLASS TO PROTECT THE BLACK PAINT FROM SCRATCHING.

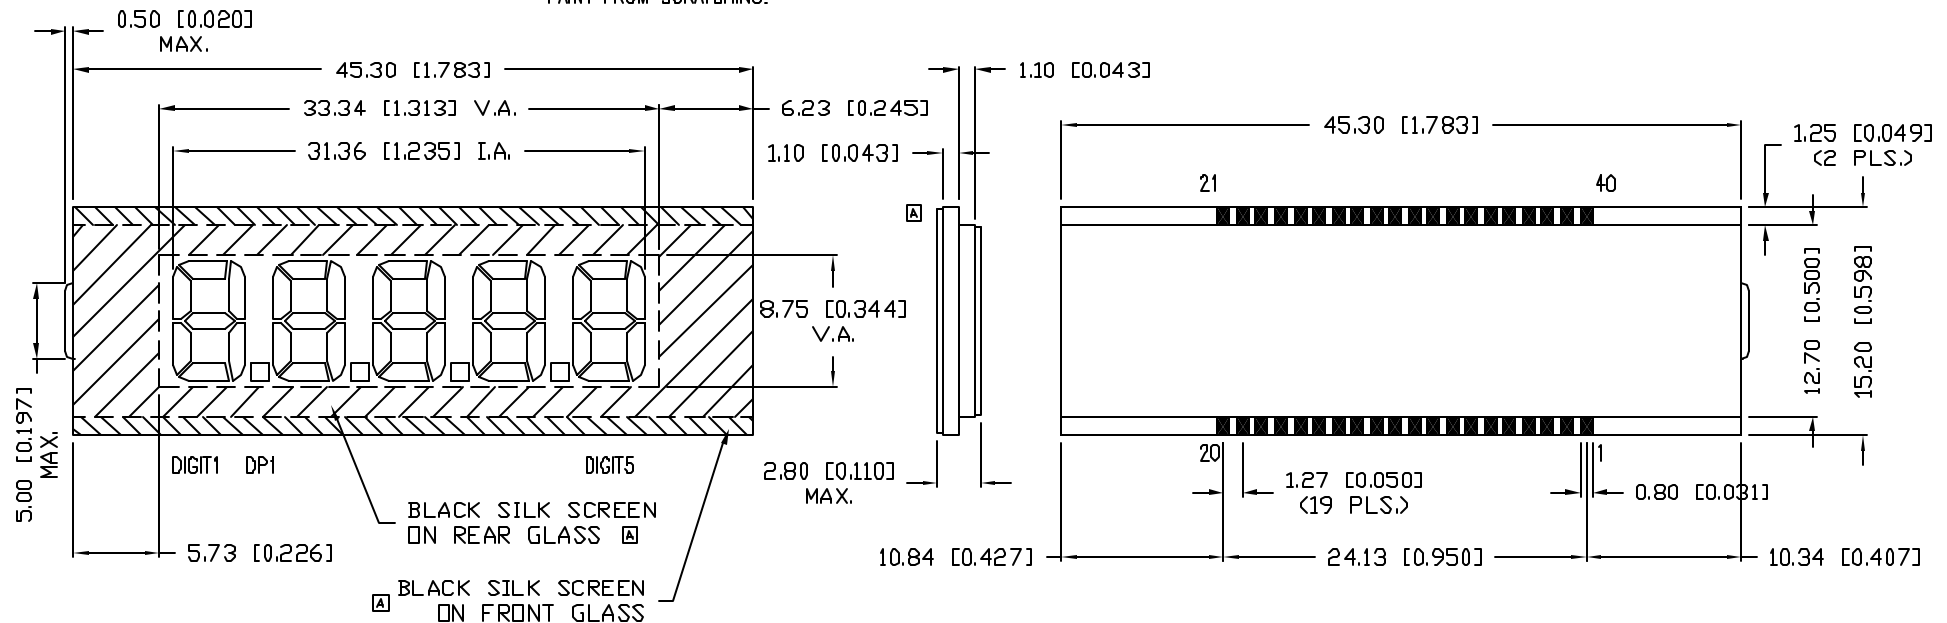


DIGIT DETAIL

CHARACTERISTICS

FLUID TYPE:	TN
BACKGROUND COLOR:	NEGATIVE IMAGE
VIEWING DIRECTION:	3:00/9:00 OPTIMIZATION
DISPLAY MODE:	TRANSMISSIVE
OPERATING VOLTAGE:	5.0V A.C.
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 80°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	40 PADS (ELASTOMER)

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT	COM	1E	1D	1C	DP1	2E	2D	2C	DP2	3E
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEGMENT	3E	3C	DP3	4E	4D	4C	DP4	5E	5D	5C
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT	5B	5A	5F	5G	4B	4A	4F	4G	3B	3A
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT	3F	3G	2B	2A	2F	2G	1B	1A	1F	1G



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+0.00 (0.00) DECIMAL PRECISION MAX.=+0.00 (0.00) DECIMAL PRECISION

REV.

B

PART NUMBER

LCD-H501M30TN-D

5 DIGIT CUSTOM LCD PANEL, TN,
TRANSMISSIVE, NEGATIVE IMAGE WITH SILK SCREEN.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JG

CHECKED BY:

APPROVED BY:

DATE: 5.15.03

PAGE: 1 OF 1

SCALE: N/A