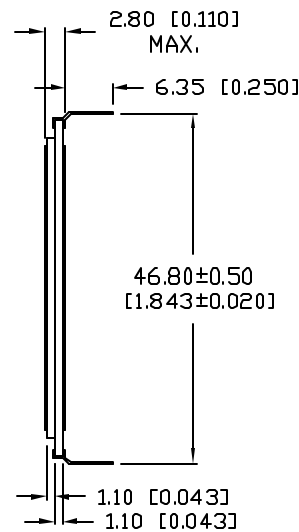
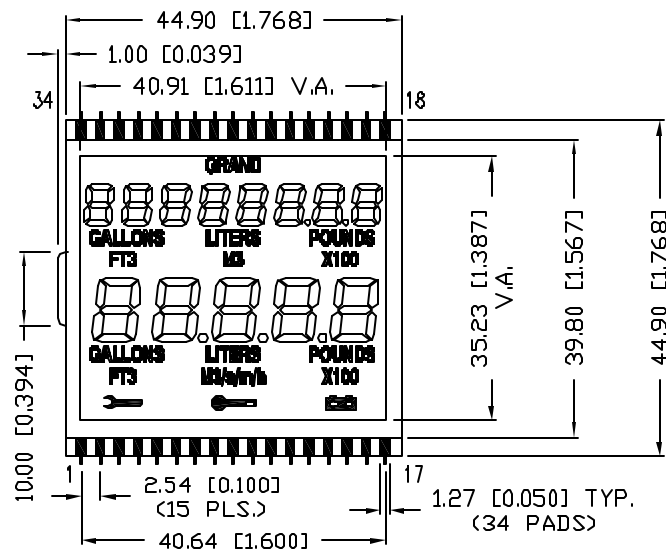


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H501M34TF-1

REV.

A

REV. E.C.N. NUMBER AND REVISION COMMENTS
A E.C.N. #11148.DATE
02.07.072.00 [0.079]
ALL TEXT
GRAND

5.00 [0.197]

6.00 [0.236]




2.00 [0.079]
4.00 [0.158]

NOTES:

- 'X10' AND '0' ARE SEPARATE SEGMENTS.
- 'M3', '/s', '/m', '/h' ARE SEPARATE SEGMENTS.

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	12:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	3~3.3V
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD:	1/4 DUTY
CONNECTION TYPE:	34 PINS

PIN	COM1	COM2	COM3	COM4	PIN	COM1	COM2	COM3	COM4
1	9F	9G	9E	9D	18	8A	8B	8C	0 (1)
2	9A	9B	9C	GALLONS (2)	19	8F	8G	8E	8D
3	10F	10G	10E	10D	20	7A	7B	7C	DP7
4	10A	10B	10C	DP10	21	7F	7G	7E	7D
5	key	h	LITERS (2)	FT3 (2)	22	6A	6B	6C	DP6
6	h	h	M3 (2)	key	23	6F	6G	6E	6D
7	11F	11G	11E	11D	24	5A	5B	5C	POUNDS (1)
8	11A	11B	11C	DP11	25	5F	5G	5E	5D
9	12F	12G	12E	12D	26	GRAND			
10	12A	12B	12C	DP12	27	4A	4B	4C	LITERS (1)
11	13F	13G	13E	13D	28	4F	4G	4E	4D
12	13A	13B	13C	X10 (1)	29	3A	3B	3C	M3 (1)
13	key	0 (2)	X10 (2)	POUNDS (2)	30	3F	3G	3E	3D
14				COM4	31	2A	2B	2C	GALLONS (1)
15				COM3	32	2F	2G	2E	2D
16		COM2			33	1A	1B	1C	FT3 (1)
17	COM1				34	1F	1G	1E	1D

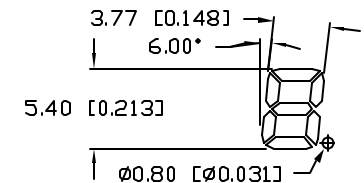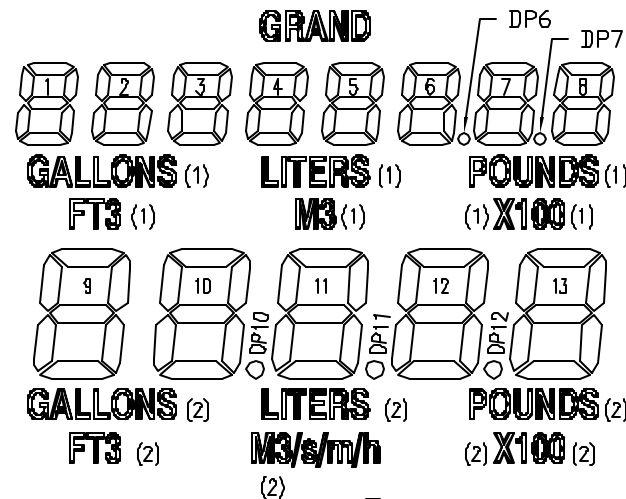

UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-H501M34TF-1

CUSTOM LCD PANEL, TN, TRANSFLECTIVE, 12:00 VIEW,
1/4 DUTY, 34 PINS, EXTENDED OPERATING TEMP.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 4.9.99

PAGE: 1 OF 1

SCALE: N/A