


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H501M40TR-1REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

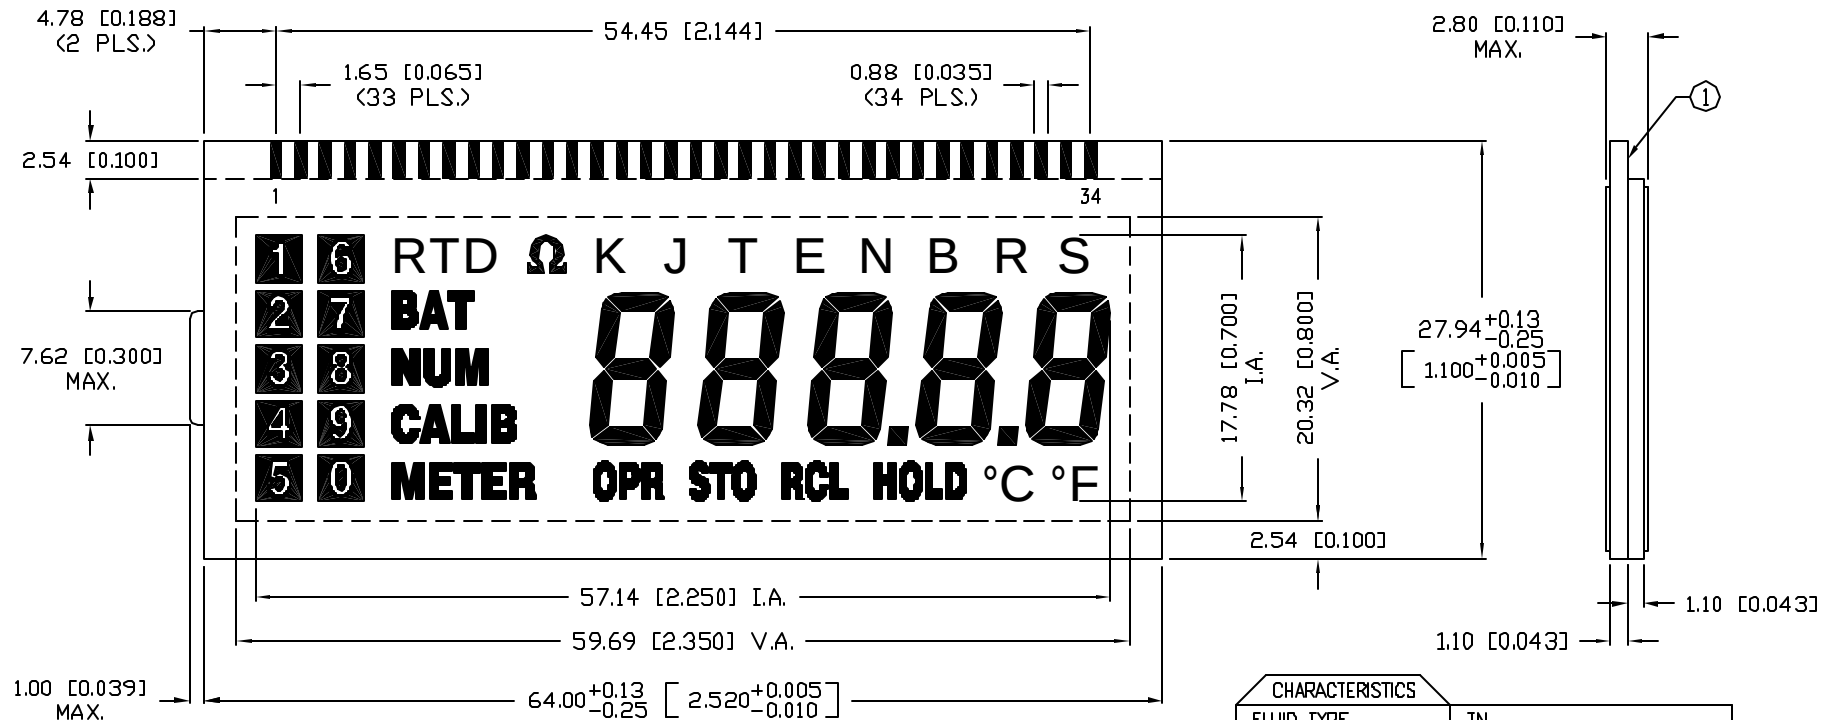

NOTES:

1. CONTACT PADS ARE ON THE BOTTOM SIDE OF GLASS.

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.75V $V_{RMS(ON)}=2.38V$ $V_{RMS(OFF)}=1.24V$
OPERATING TEMP.	-30°C TO 80°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/3 DUTY, 1/3 BIAS
CONNECTION TYPE	ELASTOMER

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+DECIMAL PRECISION}/_{-0.00} MAX.=^{+0.00}/_{-DECIMAL PRECISION}

REV.

A

PART NUMBER

LCD-H501M40TR-1

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

5 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
-30°C TO +80°C OPERATING TEMPERATURE, NO PINS.

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 4.4.02
JC'			PAGE: 1 OF 2
			SCALE: N/A


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H501M40TR-1REV.
A


REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

A SEE PAGE #1

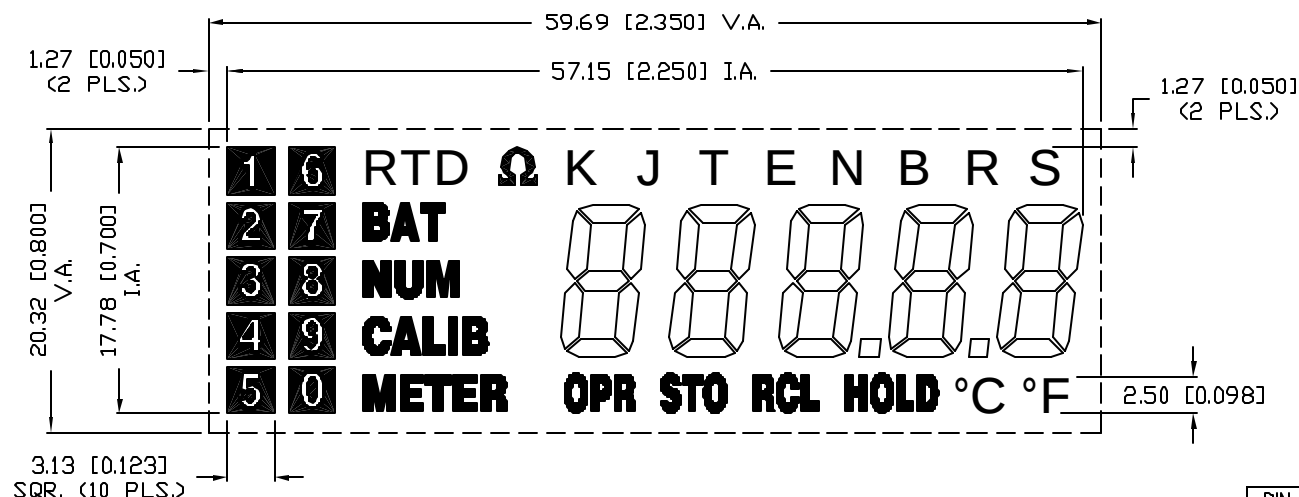

CHARACTER DETAIL

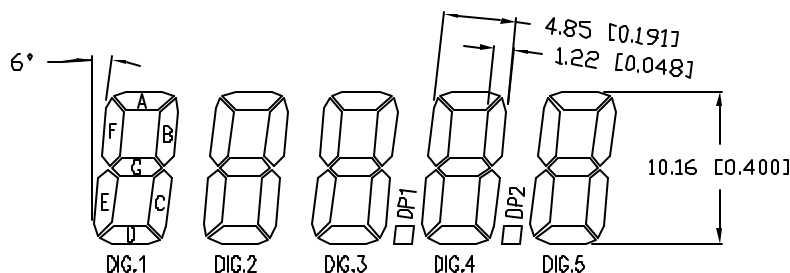

PIN NO.	1	2	3	4	5	6	7	8	9	10
COM 1	8	3	/	1	6	COM1	COM1	RTD	Ω	NUM
COM 2	9	4	COM2	2	7	/	/	BAT	/	CALIB
COM 3	0	5	/	/	/	/	/	/	/	METER
PIN NO.	11	12	13	14	15	16	17	18	19	20
COM 1	1F	K	1A	1B	J	2F	2A	T	2B	3F
COM 2	1E	/	1G	1C	/	2E	2G	/	2C	3E
COM 3	/	/	1D	OPR	/	STO	2D	/	/	RCL
PIN NO.	21	22	23	24	25	26	27	28	29	30
COM 1	E	3A	N	3B	4F	B	4A	4B	R	5F
COM 2	/	3G	/	3C	4E	/	4G	4C	/	5E
COM 3	/	3D	/	DP1	HOLD	/	4D	DP2	/	°C
PIN NO.	31	32	33	34						
COM 1	5A	S	5B	/						
COM 2	5G	/	5C	/						
COM 3	5D	/	°F	COM3						

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+0.00/-0.00, MAX.=+0.00/-0.00

REV.

PART NUMBER

A

LCD-H501M40TR-1

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 4.4.02

PAGE: 2 OF 2

SCALE: N/A

5 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,

-30°C TO +80°C OPERATING TEMPERATURE, NO PINS.