


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H501M49TRREV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

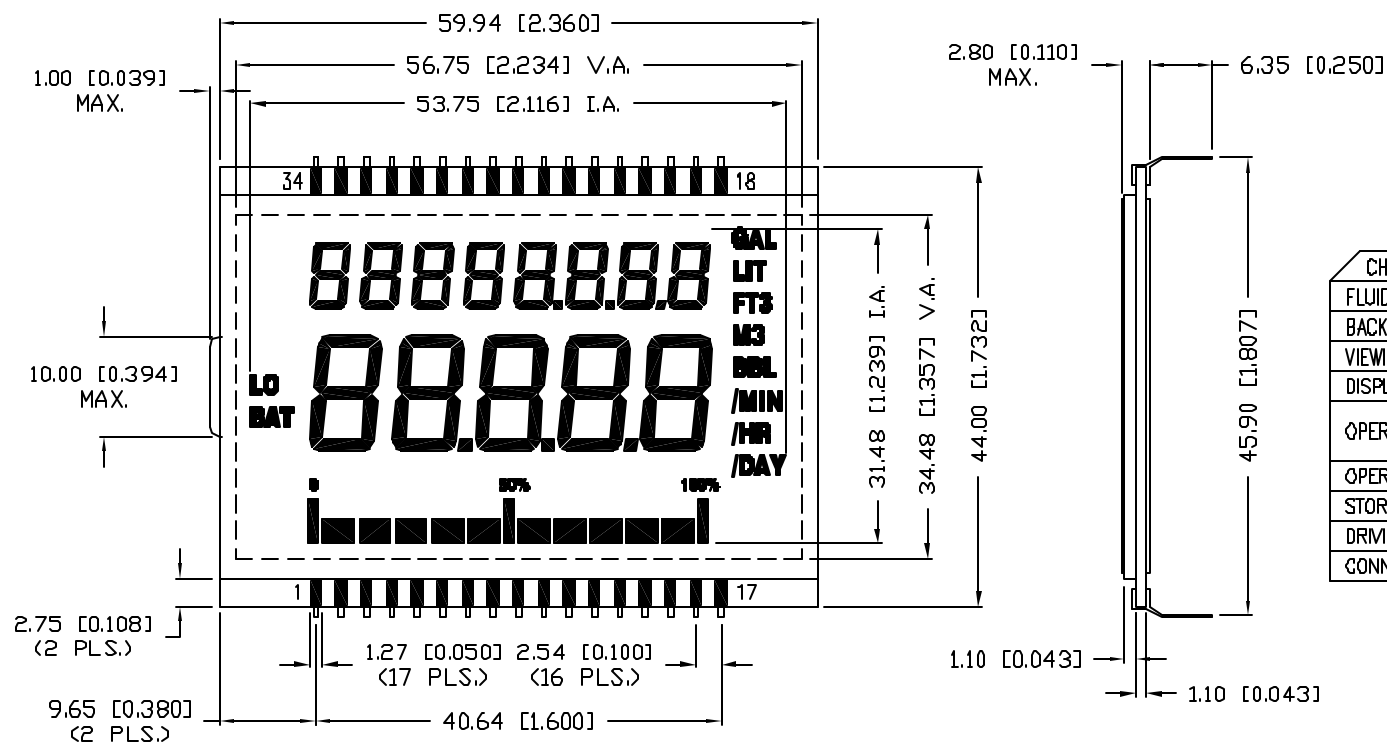

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.3V A.C. $V_{RMS(ON)}=1.74V$ $V_{RMS(OFF)}=1.1V$
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 75°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	34 PINS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.
APART NUMBER
LCD-H501M49TR

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.




290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

CUSTOM LCD PANEL, TN, REFLECTIVE,
6:00 VIEW, -20°C TO +70°C OPERATING TEMPERATURE.



RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 4.19.01 PAGE: 1 OF 2 SCALE: N/A
-----------------	-------------	--------------	---

UNCONTROLLED DOCUMENT

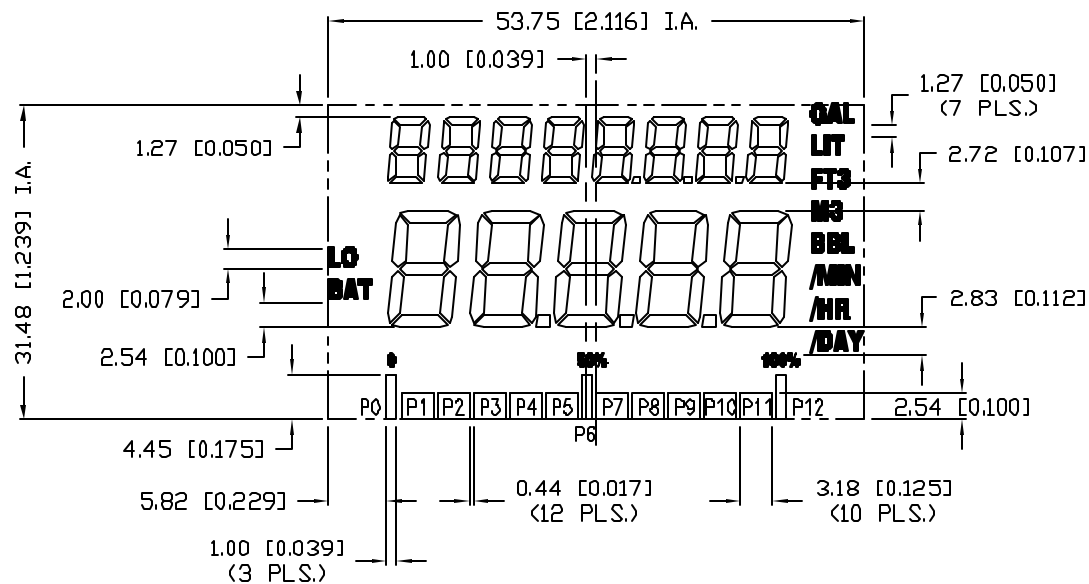

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
COM1	1F	1A	2F	2A	3F	3A	COM1	/	P3	P4	P8	4F	4A	5F	5A	CAL	/
COM2	1G	1B	2G	2B	3G	3B	/	COM2	P2	P5	P9	4G	4B	5G	5B	LIT	/
COM3	1E	1C	2E	2C	3E	3C	/	/	P1	P6	P10	4E	4C	5E	5C	FT3	/
COM4	1D	LOBAT	2D	DP2	3D	DP3	/	/	P0	P7	P11	4D	DP4	5D	P12	M3	COM4
PIN NO.	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
COM1	/	6A	6F	7A	7F	8A	8F	9A	9F	10A	10F	11A	11F	12A	12F	13A	13F
COM2	/	6B	6G	7B	7G	8B	8G	9B	9G	10B	10G	11B	11G	12B	12G	13B	13G
COM3	COM3	6C	6E	7C	7E	8C	8E	9C	9E	10C	10E	11C	11E	12C	12E	13C	13E
COM4	/	BBL	6D	DP7	7D	DP8	8D	DP9	9D	/MIN	10D	/HR	11D	/DAY	12D	/	13D

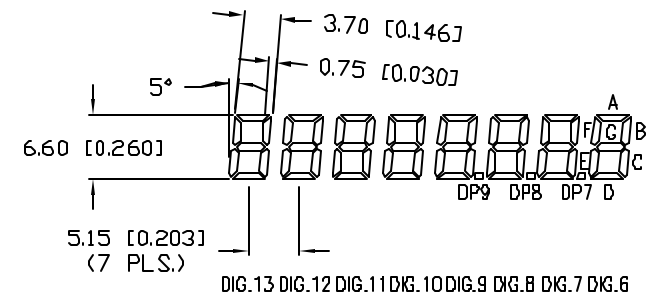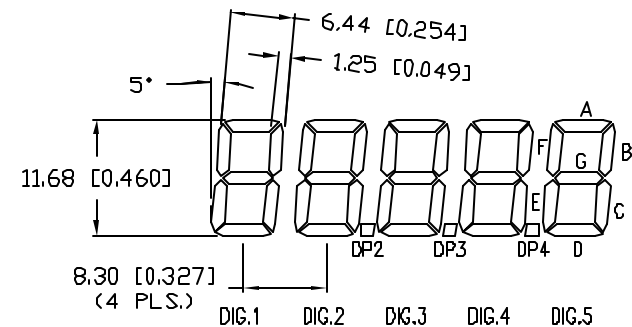

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-H501M49TR

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

A

CUSTOM LCD PANEL, TN, REFLECTIVE,

6:00 VIEW, -20°C TO +70°C OPERATING TEMPERATURE.

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 4.19.01

PAGE: 2 OF 2

SCALE: N/A