


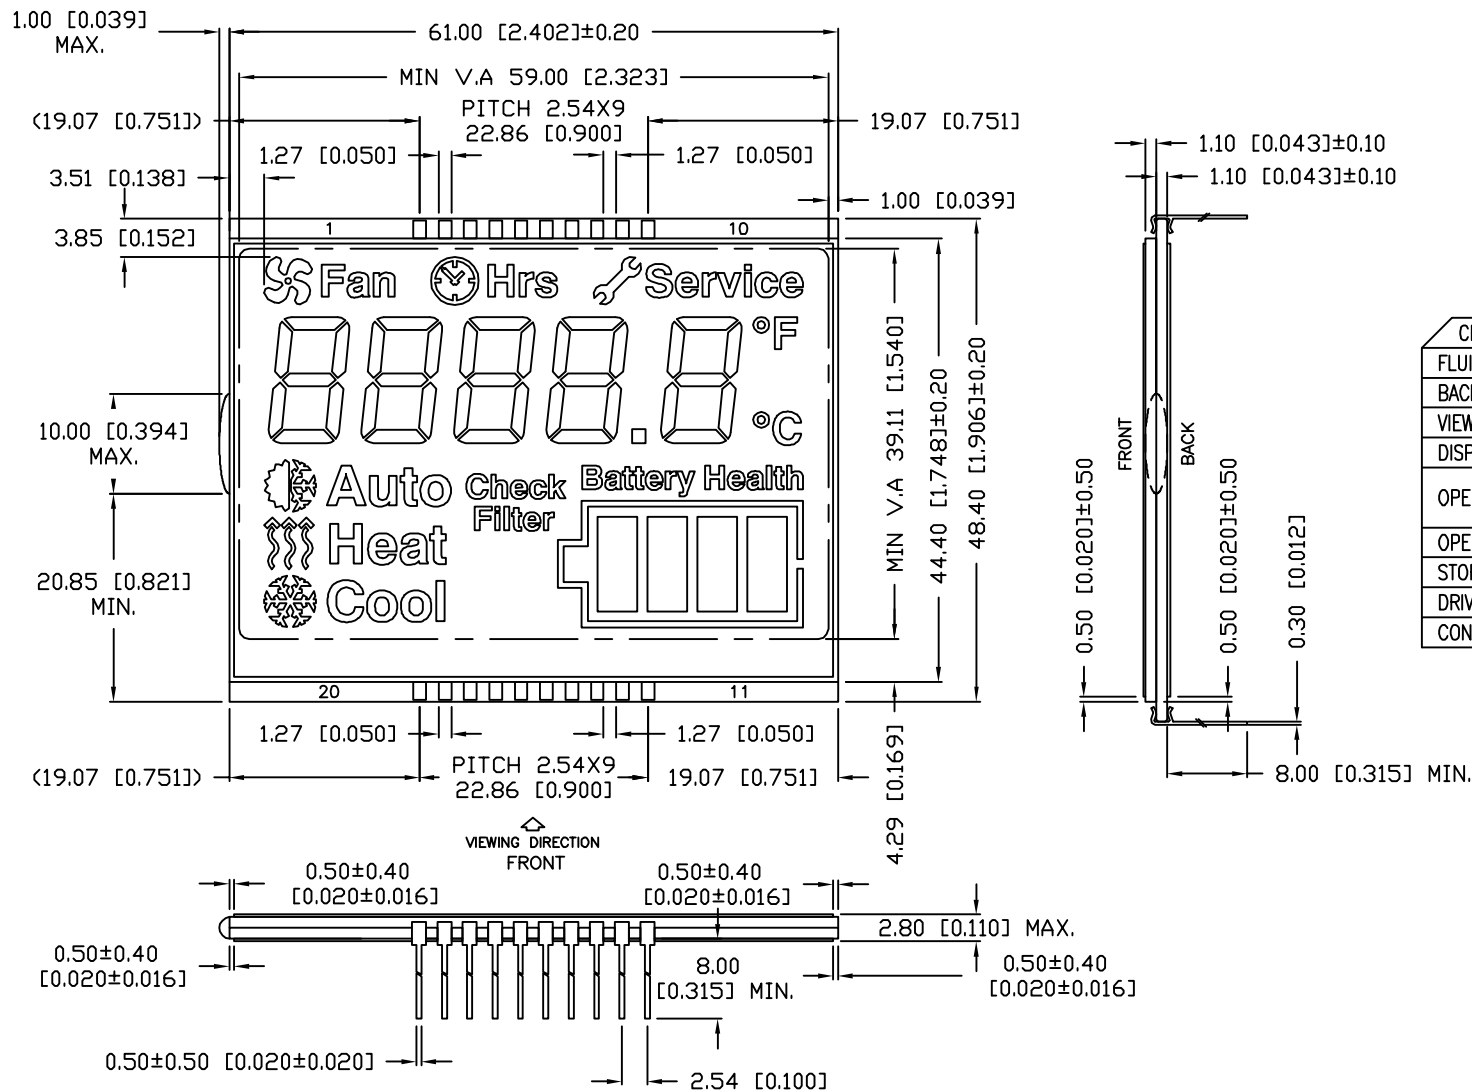

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER
LCD-H501M50TF

CUSTOM LCD PANEL, TN, TRANSFLECTIVE, POSITIVE, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 09.21.09

PAGE: 1 OF 2

SCALE: N/A

PART NUMBER
LCD-H501M50TF


Technical drawing of a control panel with dimensions and labels. The panel features a display area with icons and text, and a row of five buttons labeled 1 through 5. Dimensions are provided in inches and millimeters.

Labels and icons on the panel include:

- Top Row:** Fan (X1), Hrs (X2), Service (X3).
- Buttons:** 1, 2, 3, 4, 5.
- Bottom Row:** Auto (X6), Check Filter (X9), Battery Health (X10), Heat (X7), Cool (X8).
- Other Labels:** P, T1, T2, T3, T4, T5.

Dimensions:

- Overall width: 54.00 [2.126]
- Overall height: 37.11 [1.461]
- Top margin: 1.00 [0.039]
- Bottom margin: 1.00 [0.039]
- Left margin: 1.00 [0.039]
- Right margin: 1.00 [0.039]
- Display area width: 9.28 [0.365]
- Display area height: 11.45 [0.451]

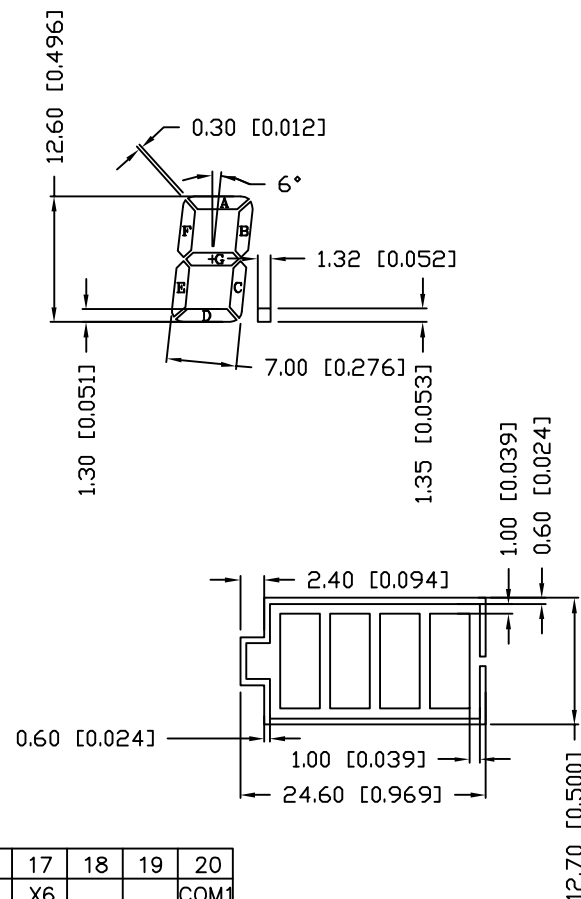

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	X1	1A	2A	X2	3A	4A	P	X3	5A	X4	T5	T2	X10	X9	X8	X7	X6			COM
COM2	1F	1G	2G	3F	3G	4G	4B	5F	5G	5B	T4	T3	4F	3B	2B	2F	1B		COM2	
COM3	1E	1D	2D	3E	3D	4D	4C	5E	5D	5C	X5	T1	4E	3C	2C	2E	1C	COM3		

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+0.00
-DECIMAL PRECISION MAX.=+0.00
-DECIMAL PRECISION

PART NUMBER
LCD-H501M50TF

CUSTOM LCD PANEL, TN, TRANSFLECTIVE, POSITIVE, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: JN	CHECKED BY:	APPROVED BY:	DATE: 09.21.09 PAGE: 2 OF 2 SCALE: N/A
-----------------	-------------	--------------	--