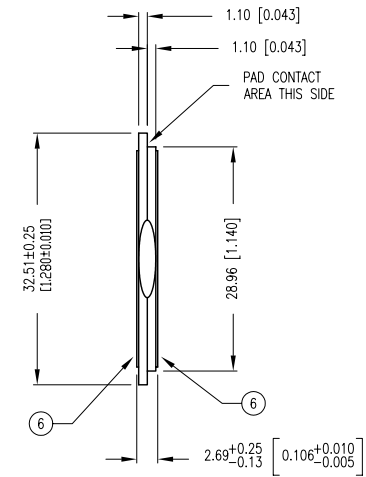



UNCONTROLLED DOCUMENT

DATE: 04.13.11	DRAWN BY: AB
PAGE: 1 OF 2	CHKD BY: SS
SCALE: NTS	APRVD BY: SS
UNIT: mm [INCH]	


CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

PART NUMBER	LCD-H502M44TF-1D	REV.	E
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
04.06.00	E.C.N. #10611.		A
06.29.00	E.C.N. #10635.		B
02.07.01	E.C.N. #11148.		C
04.13.11	E.C.N. #10BRDR.		D
08.16.11	E.C.N. #11742.		E

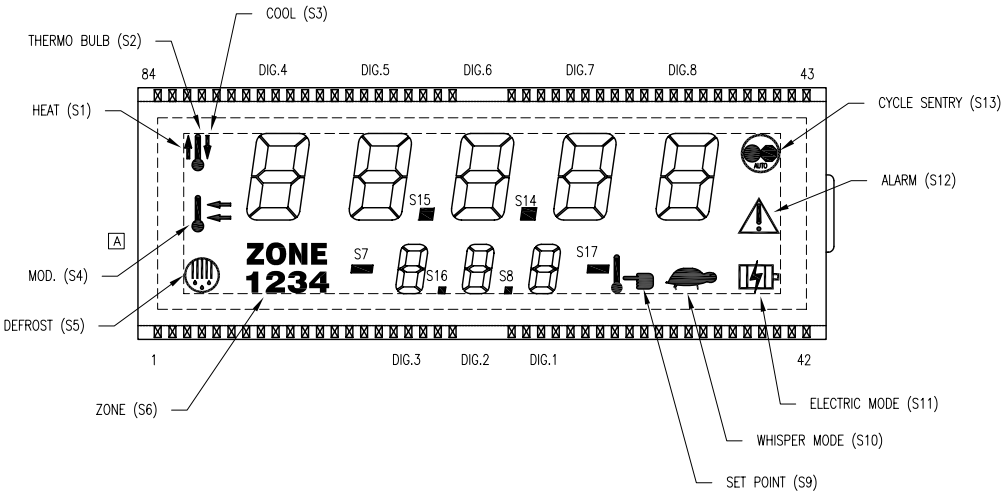

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	NEUTRAL
VIEWING DIRECTION:	12:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	5.0V
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD:	STATIC
CONNECTION TYPE:	ELASTOMER

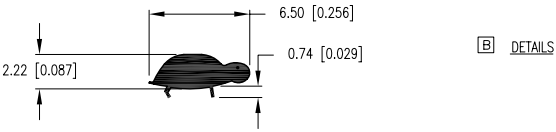


PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG
1	S6	10	S7	19	2A	28	1F	37	S9	46	COM	55	7B	64	6F	73	5E	82	S2								
2	1	11	3A	20	2F	29	1E	38	S10	47	S13	56	7A	65	6G	74	4C	83	S4								
3	COM	12	3F	21	2E	30	1D	39	NC	48	8C	57	7F	66	6E	75	4B	84	S5								
4	2	13	3E	22	2D	31	1C	40	S12	49	8B	58	7G	67	S15	76	4A										
5	3	14	3D	23	2C	32	1G	41	S11	50	8A	59	7E	68	5C	77	4F										
6	4	15	3C	24	2G	33	1B	42	COM	51	8F	60	S14	69	5B	78	4G										
7	4D	16	3G	25	2B	34	7D	43	NC	52	8G	61	6C	70	5A	79	4E										
8	5D	17	3B	26	S8	35	8D	44	NC	53	8E	62	6B	71	5F	80	S3										
9	6D	18	S16	27	1A	36	S17	45	NC	54	7C	63	6A	72	5G	81	S1										

ICONS

- S1 -HEAT
- S2 -THERMO BULB
- S3 -COOL
- S4 -MOD.
- S5 -DEFROST
- S6 -ZONE
- S7 -MINUS SIGN
- S8 -DECIMAL
- S9 -SETPOINT
- S10-WHISPER MODE
- S11-ELECTRIC MODE
- S12-ALARM
- S13-CYCLE SENTRY
- S14-DECIMAL POINT
- S15-DECIMAL POINT
- S16-DECIMAL POINT
- S17-MINUS SIGN

NOTES:

1. LINE THICKNESS FOR S5, S11, S12, AND S13 IS 0.30mm.
2. INCREASE SEGMENT THICKNESS OF DIG 4, 5, 6, 7, 8 FROM 1.27mm TO 1.60mm. KEEPING THE HEIGHT OF 11.18mm AND WIDTH OF 6.80mm.
3. DECREASE SEGMENT THICKNESS OF DIG. 1, 2, 3 FROM 1.00mm TO 0.85mm. KEEPING HEIGHT OF 6.35mm AND WIDTH OF 3.46mm.
4. INCREASE THICKNESS OF ZONE/1234. SEE DETAILS.
5. INCREASE SIZE OF TURTLE (S10). SEE DETAILS.
6. PROTECTIVE FILM WITH BLUE TAB ON FRONT AND BACK OF LCD GLASS.



CUSTOMER PART #: 0842-0149-0000