



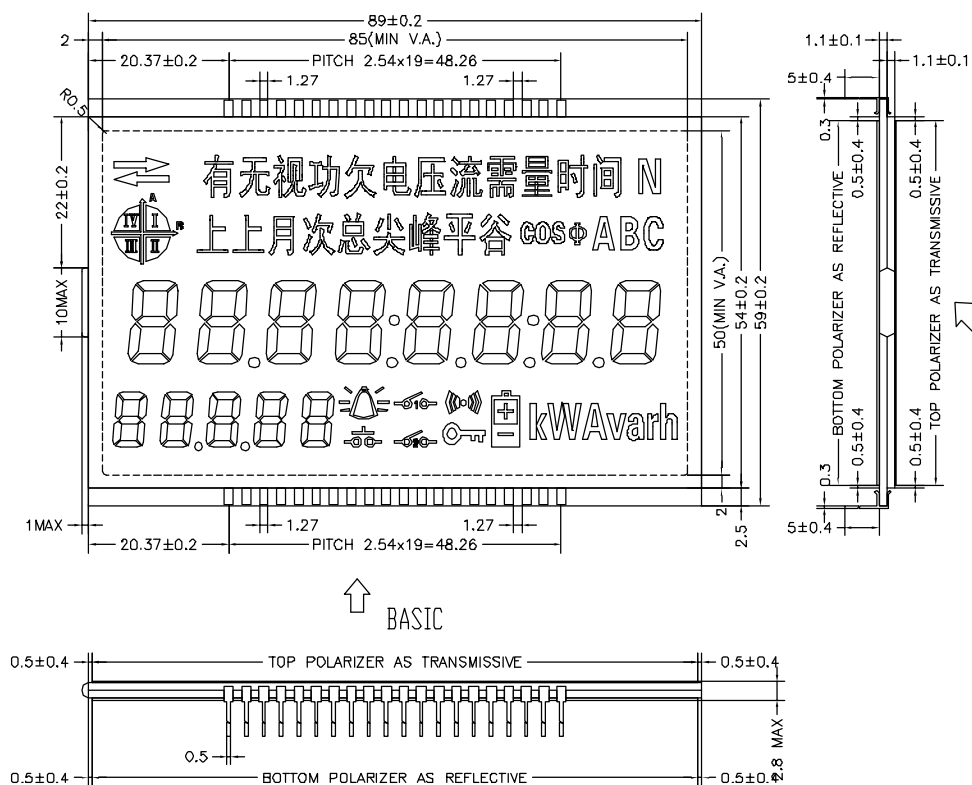

SPECIFICATION:

- DISPLAY TYPE:
FSTN, NEGATIVE
- VIEWING ANGLE:
6H
- DRIVING VOLTAGE:
3.4V
- DRIVE METHOD:
1/4DUTY, 1/3BIAS
- FRONT POLARIZER:
TRANSMISSIVE
- BACK POLARIZER:
TRANSFLECTIVE
- OPERATING TEMP:
-20~70°C
- STORAGE TEMP:
-30~80°C
- CONNECTORS:
Pin
- SCREEN PRINTING:
WITHOUT

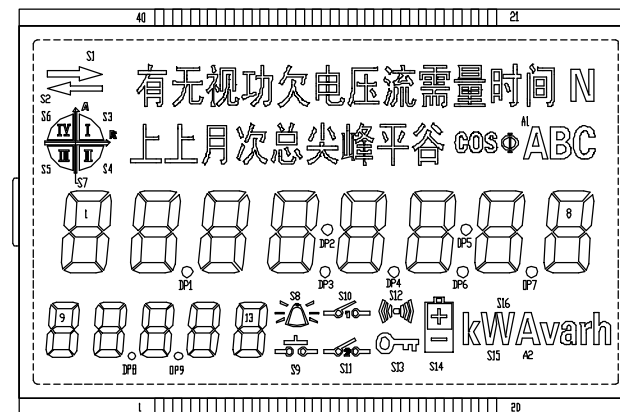

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	1F	1A	2F	2A	9F	9A	10F	10A	11F	11A	12F	12A	13F	13A	S10	S14	COM1			
COM2	1G	1B	2G	2B	9G	9B	10G	10B	11G	11B	12G	12B	13G	13B	S12	K		COM2		
COM3	1E	1C	2E	2C	9E	9C	10E	10C	11E	11C	12E	12C	13E	13C	S11	S15			COM3	
COM4	S7	1D	S4	2D	DP1	9D	S8	10D	DP8	11D	DP9	12D	S9	13D	S13	DP2				COM4
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM1	h	8A	8F	7A	7F	COM2	COM3	COM4	COM5	COM6	COM7	COM8	COM9	COM10	COM11	COM12	COM13	COM14	COM15	COM16
COM2	var	8B	8G	7B	7G	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14	A15
COM3	A2	8C	8E	7C	7E	B	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14
COM4	S16	8D	DP7	7D	DP6	C	N	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	N13

