



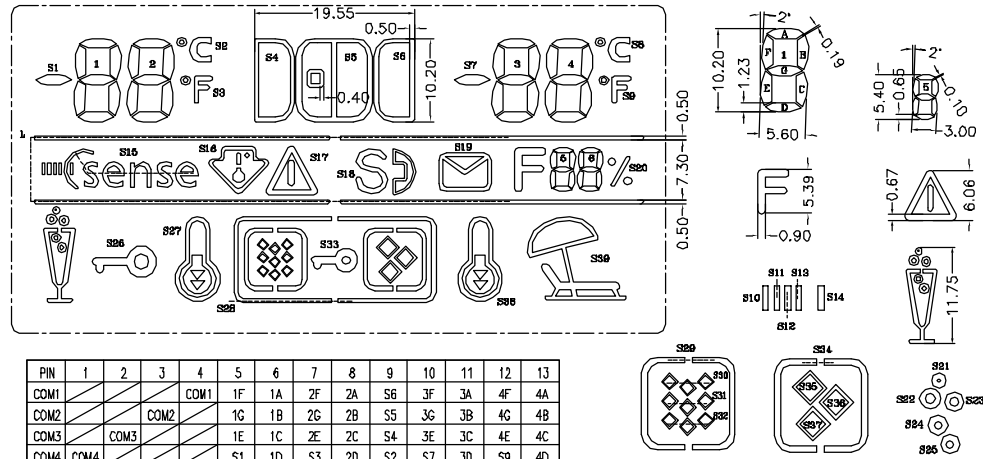

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1				COM1	1F	1A	2F	2A	S6	3F	3A	4F	4A
COM2			COM2		1G	1B	2G	2B	S5	3G	3B	4G	4B
COM3		COM3			1E	1C	2E	2C	S4	3E	3C	4E	4C
COM4	COM4				S1	1D	S3	2D	S2	S7	3D	S9	4D

PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM1	S8	S16	SF	5A	6F	6A	S39	S36	S32	S11	S24	S25	
COM2	S14	S17	5G	5B	6G	6B	S38	S35	S31	S12	S23		
COM3	S15	S18	5E	5C	6E	6C	S28	S34	S29	S13	S22	S26	
COM4	L	S19	F	5D	S20	6D	S33	S37	S30	S10	S21	S27	

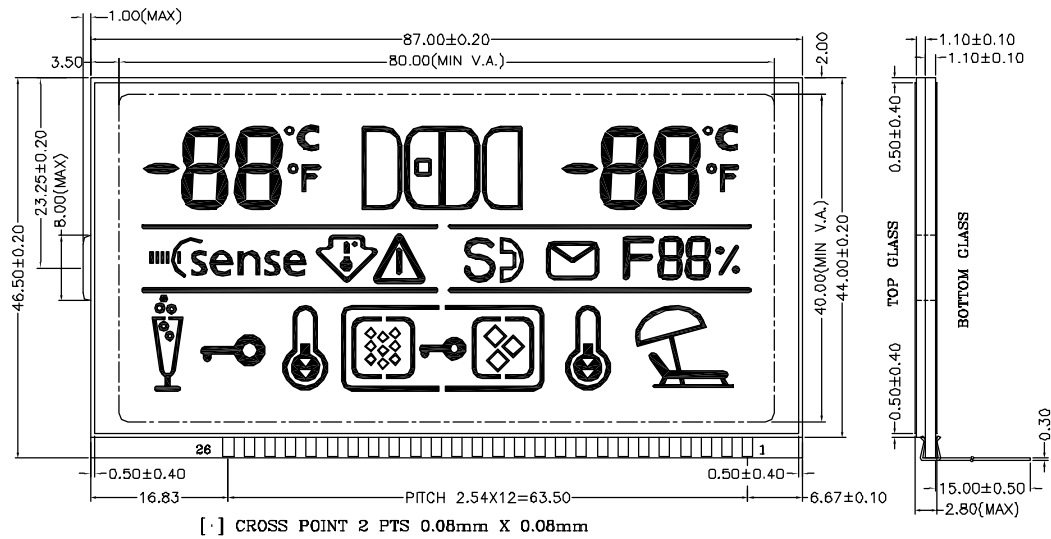

- NOTES:
1. DISPLAY TYPE: TN
 2. OPERATING VOLTAGE: 5.0V
 3. OPERATING TEMPERATURE: -20°C~70°C
 4. STORAGE TEMPERATURE: -30°C~80°C
 5. DRIVE MODE: 1/4DUTY,1/3BIAS
 6. VIEWING DIRECTION: 12:00
 7. POLARIZER TYPE: TRANFLECTIVE,POSITIVE
 8. CONNECTOR: PIN

