

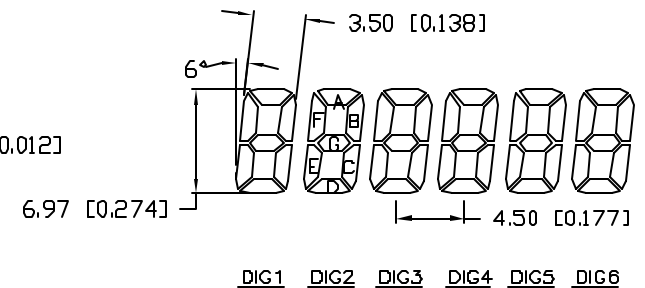


PART NUMBER		REV.
LCD-H601M31TR-13		P1
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

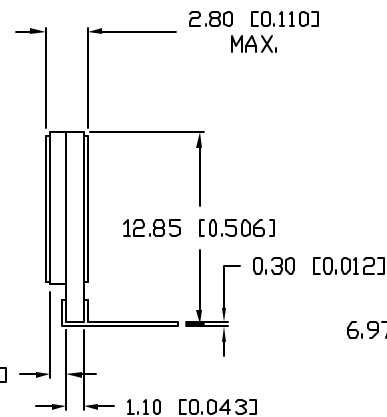

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1	COM1						1D	1E	1C	1G	1B	1F	1A
COM2		COM2					2D	2E	2C	2G	2B	2F	2A
COM3			COM3				3D	3E	3C	3G	3B	3F	3A
COM4				COM4			4D	4E	4C	4G	4B	4F	4A
COM5					COM5		5D	5E	5C	5G	5B	5F	5A
COM6						COM6	6D	6E	6C	6G	6B	6F	6A

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	2.8V A.C.
OPERATING TEMP.	-20°C TO 70°C
STORAGE TEMP.	-30°C TO 80°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	13 PINS

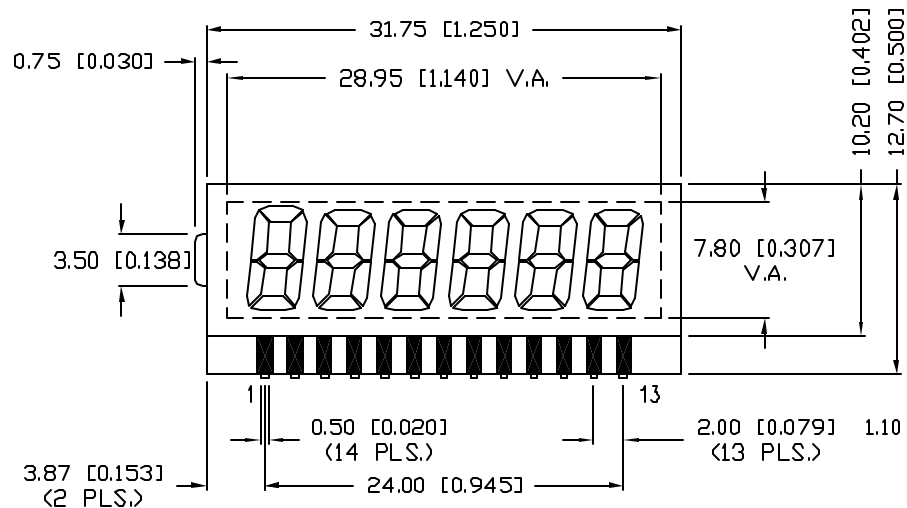

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION
-0.00 MAX.=+0.00
-DECIMAL PRECISION

REV. P1	PART NUMBER LCD-H601M31TR-13	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw			
0.27" CHARACTER HEIGHT, SIX DIGIT LCD GLASS, TN, REFLECTIVE, 13 PINS.			DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 9.8.03 PAGE: 1 OF 1 SCALE: N/A	