

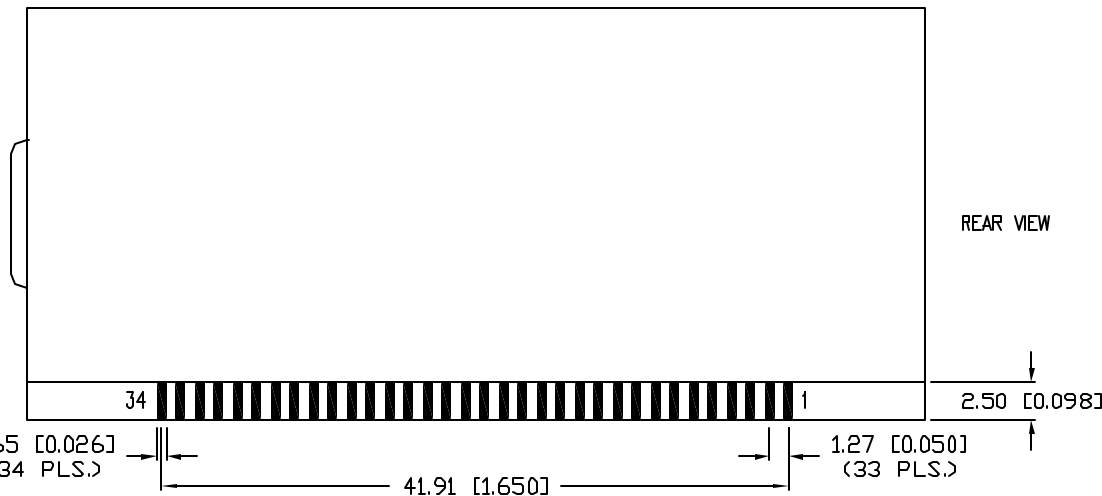


UNCONTROLLED DOCUMENT

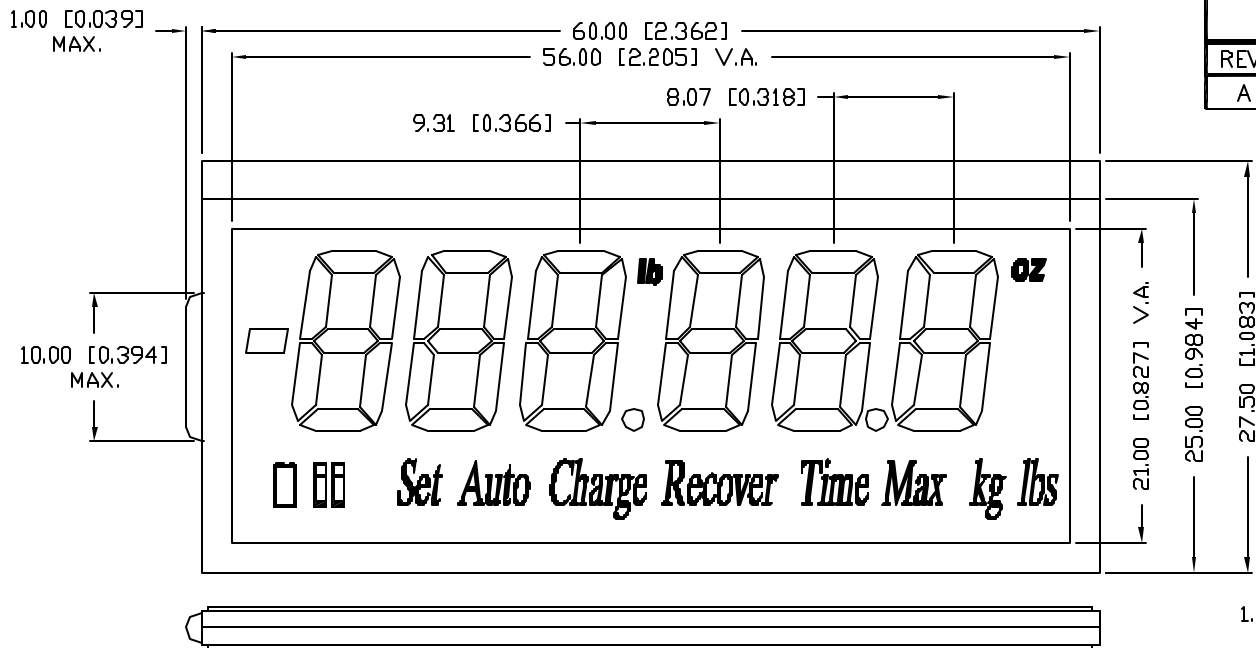

PART NUMBER		REV.
LCD-H601M47TF-D		P1
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

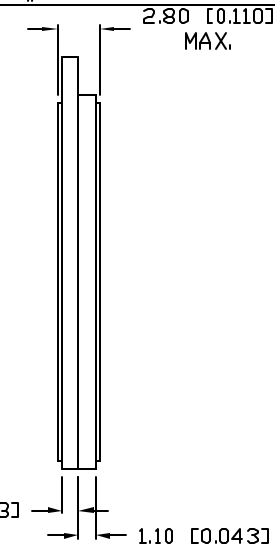

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-10°C TO 40°C
STORAGE TEMP.	-30°C TO 70°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	ELASTOMER



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.	PART NUMBER
P1	LCD-H601M47TF-D

0.47" CHARACTER HEIGHT, CUSTOM LCD PANEL,
TN, TRANSFLECTIVE, 6:00 VIEW.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.




RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw


DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 11.1.00
JC			PAGE: 1 OF 1
			SCALE: N/A

UNCONTROLLED DOCUMENT

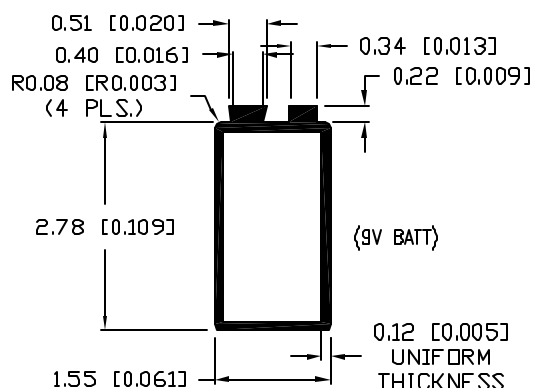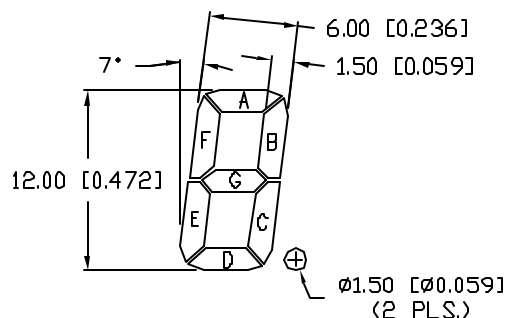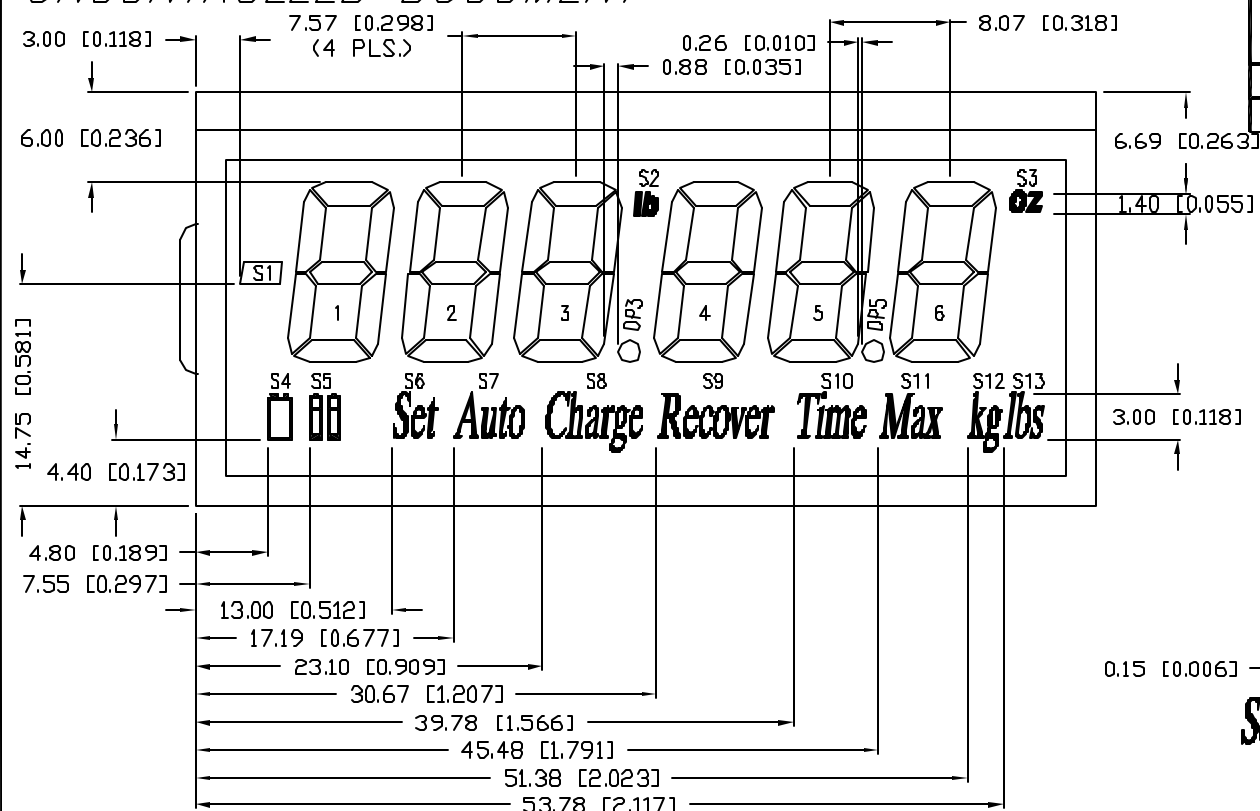

PART NUMBER		REV.
LCD-H601M47TF-D		P1
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	SEE PAGE #1	

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
COM 1	COM1	/	/	/	S13	6A	6F	6E	S12	5A	5F	5E
COM 2	/	/	/	/	S3	6B	6C	6D	6C	5B	5C	5D
PIN NO.	13	14	15	16	17	18	19	20	21	22	23	
COM 1	DP5	S11	4A	4F	4E	S9	/	3A	3F	3E	DP3	
COM 2	5C	S10	4B	4C	4D	4C	S2	3B	3C	3D	3C	
PIN NO.	24	25	26	27	28	29	30	31	32	33	34	
COM 1	S7	2A	2F	2E	S6	1A	1F	1E	S5	S1	/	
COM 2	S8	2B	2C	2D	2C	1B	1C	1D	1C	S4	COM2	

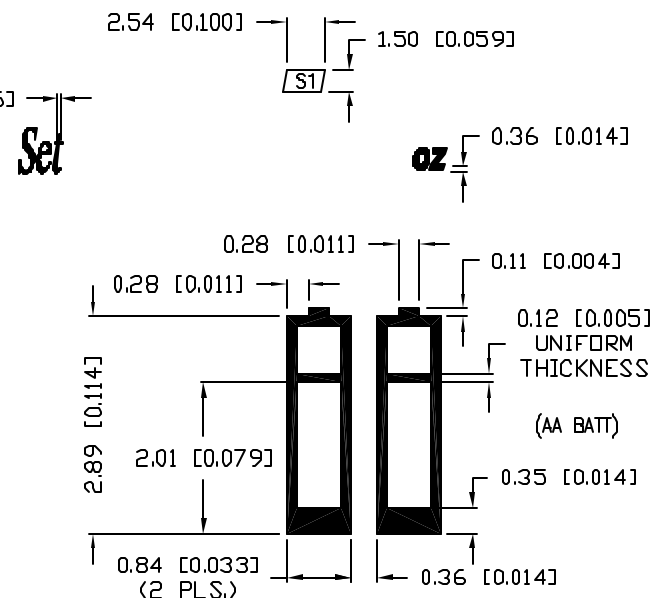

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+0.00 DECIMAL PRECISION MAX=+0.00 DECIMAL PRECISION

REV.	PART NUMBER
P1	LCD-H601M47TF-D
0.47" CHARACTER HEIGHT, CUSTOM LCD PANEL, TN, TRANSFLECTIVE, 6:00 VIEW.	

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX EYE TO THE FUTURE TO WORK FOR YOU		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw	
DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 11.1.00
JG			PAGE: 1 OF 2 SCALE: N/A