

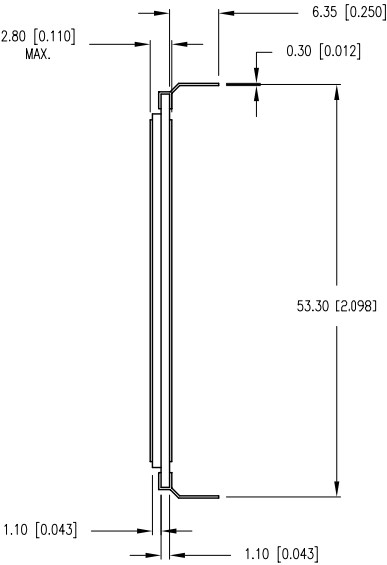
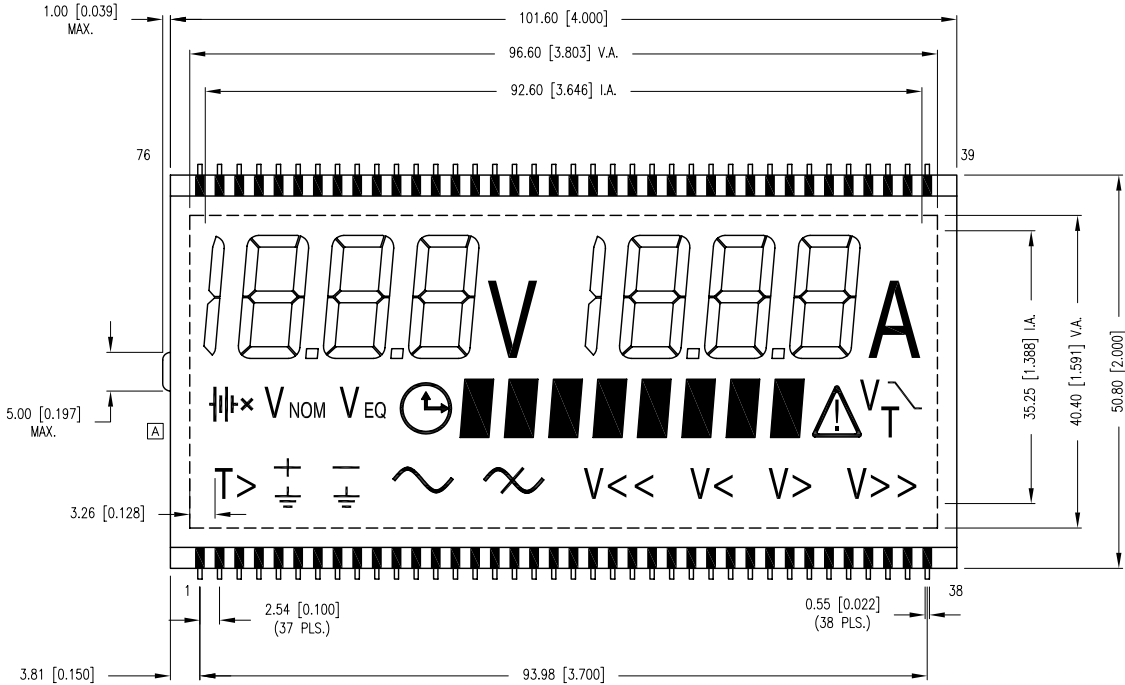
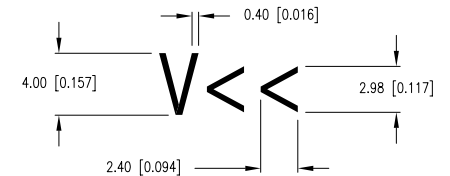
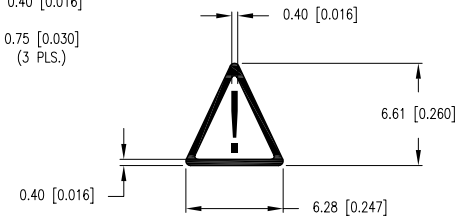
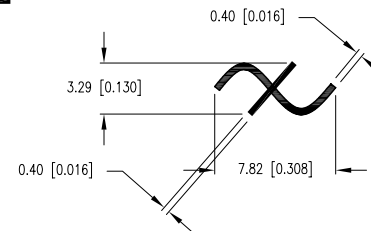
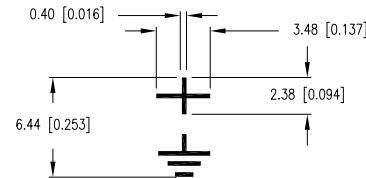

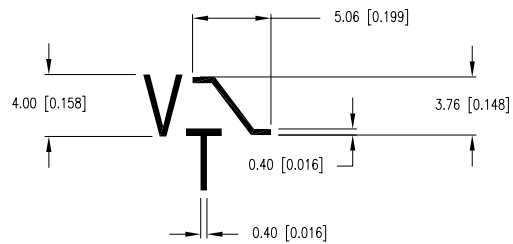
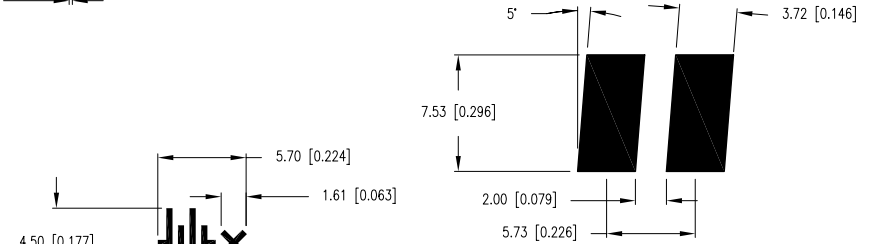
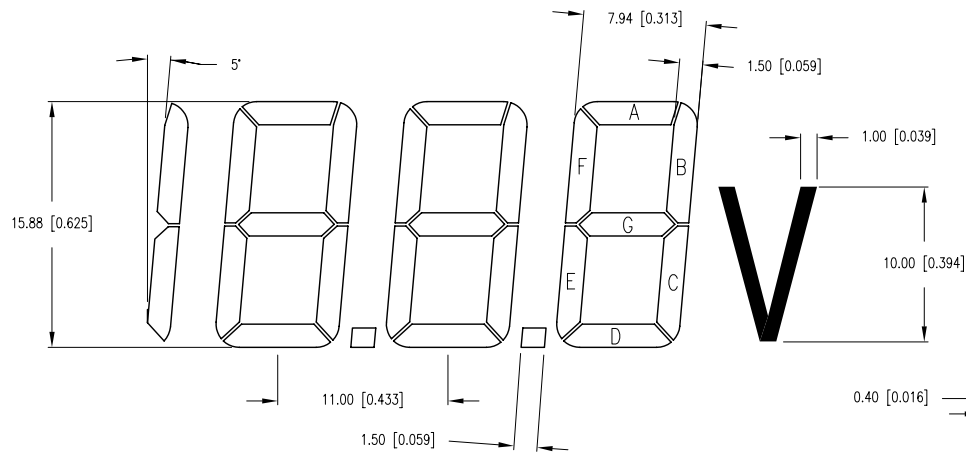
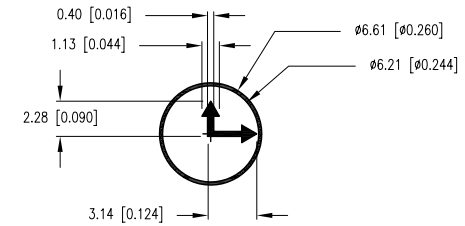


PART NUMBER	LCD-H6X2M70TF-1	REV.	D
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
06.06.03	E.C.N. #10998.		A
07.14.03	E.C.N. #11015.		B
03.13.07	E.C.N. #11148.		C
04.13.12	E.C.N. #10BRDR. & REDRAWN.		D



PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
COMA	2E	2D	2C	DP3	3E	3D	3C	DP4	4E	4D	4C	V														
COMB																										
COMC													T22	T21	T20	T19	T18	T17	T16	T15	T14	T13	T12	T11	T10	T9
PIN NO.	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52
COMA																										
COMB	6E	6D	6C	DP7	7E	7D	7C	DP8	8E	8D	8C	A	8G	8B	8A	8F	7G	7B	7A	7F	6G	6B	6A	6F	5BC	
COMC																										T8
PIN NO.	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76		
COMA								4G	4B	4A	4F	3G	3B	3A	3F	2G	2B	2A	2F	1BC	COMA					
COMB																						COMB				
COMC	T7	T6	T5	T4	T3	T2	T1														T23		COMC			

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0VAC
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	STATIC
CONNECTION TYPE	76 PINS

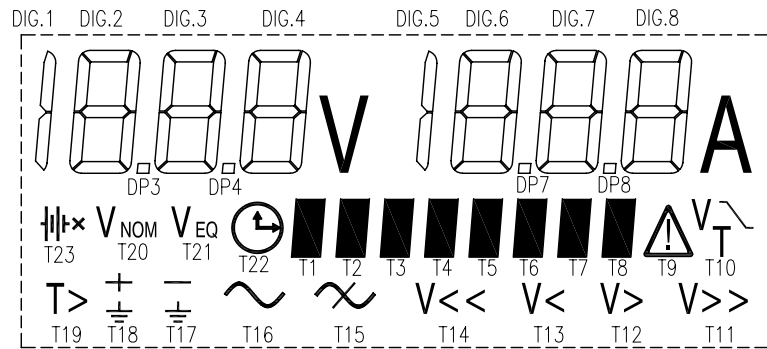

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT