


CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V
OPERATING TEMP.	-30°C TO 75°C
STORAGE TEMP.	-40°C TO 80°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	60 PINS

UNCONTROLLED DOCUMENT

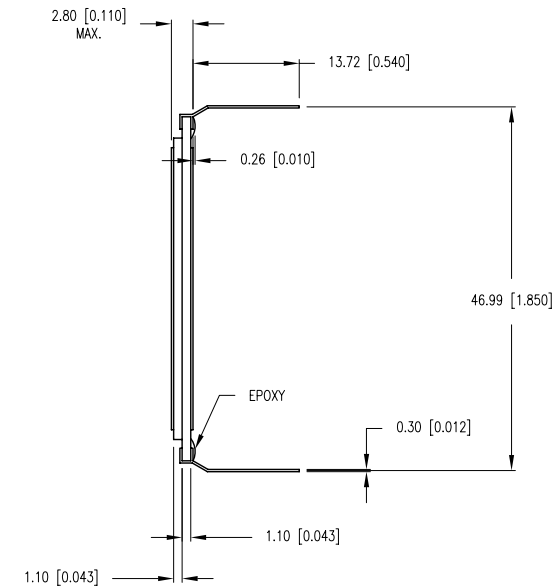

11 DIGIT CUSTOM LCD PANEL, TN, TRANSFLECTIVE, TOP VIEW, 1/2 DUTY, 1/2 BIAS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.





CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 05.22.02	DRAWN BY: AB
PAGE: 1 OF 2	CHKD BY: JD
SCALE: NTS	APRVD BY: SS
UNIT: mm [INCH]	(Pb)

PART NUMBER	LCD-H701M30TF-1	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
02.07.07	E.C.N. #11148.		A
01.17.12	E.C.N. #10BRDR. & REDRAWN.		B

PIN#	BP 1	BP 2	PIN#	BP 1	BP 2	PIN#	BP 1	BP 2	PIN#	BP 1	BP 2
1	BACKPLANE1	-	16	9A	9B	31	-	BACKPLANE2	46	4F	4G
2	MINUS 1	*	17	9F	9G	32	K Å	7C	47	4E	4D
3	DENS	Z-FACT	18	9E	9D	33	7A	7B	48	Å/S	3C
4	N/C	N/C	19	COLON	9C	34	7F	7G	49	3A	3B
5	N/C	N/C	20	10F	10G	35	7E	7D	50	3F	3G
6	SHUTTER	XTAL FAIL	21	10E	10D	36	DECIMAL 5	6C	51	3E	3D
7	MINUS 2	%	22	-	10C	37	6A	6B	52	DECIMAL 2	2C
8	SP THK	END THK	23	10A	10B	38	6F	6G	53	2A	2B
9	N/C	N/C	24	11F	11G	39	6E	6D	54	2F	2G
10	SP THICK	SP TIME	25	11E	11D	40	DECIMAL 4	5C	55	2E	2D
11	TOOL	SP TMR	26	-	11C	41	5A	5B	56	DECIMAL 1	1C
12	8A	8B	27	11A	11B	42	5F	5G	57	1A	1B
13	8F	8G	28	PGM	COM	43	5E	5D	58	1F	1G
14	8E	8D	29	gm/cc	MHz	44	DECIMAL 3	4C	59	1E	1D
15	-	8C	30	-	BACKPLANE2	45	4A	4B	60	BACKPLANE1	-

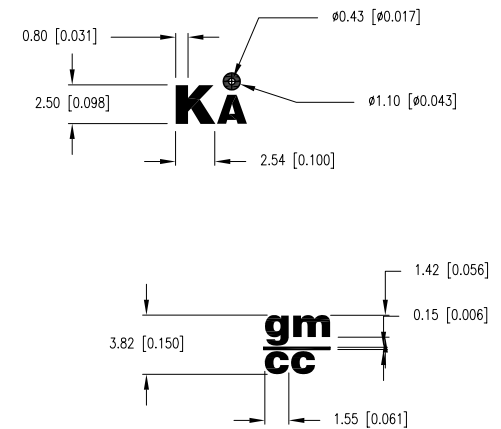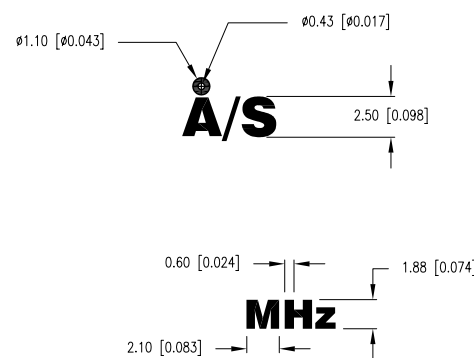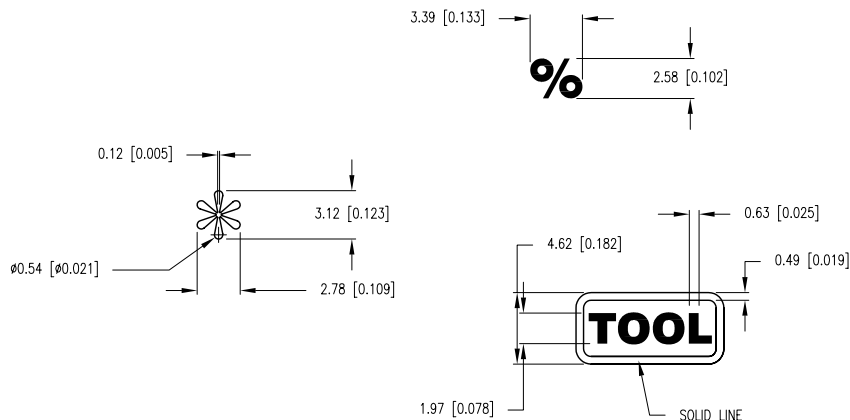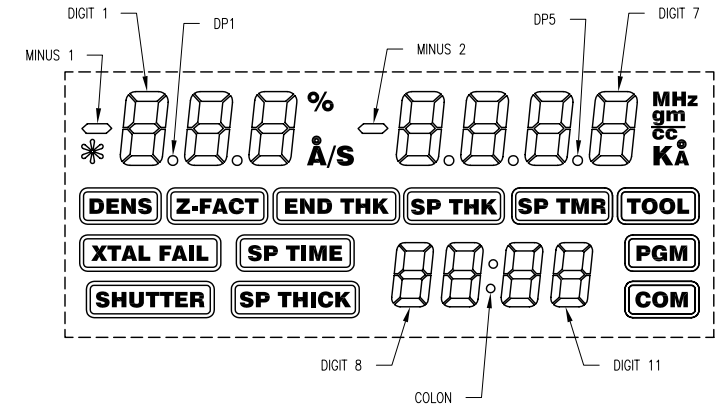

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

11 DIGIT CUSTOM LCD PANEL, TN, TRANSLUCTIVE, TOP VIEW, 1/2 DUTY, 1/2 BIAS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	05.22.02	DRAWN BY:	AB
PAGE:	2 OF 2	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	SS
UNIT:	mm [INCH]		Ⓟ