
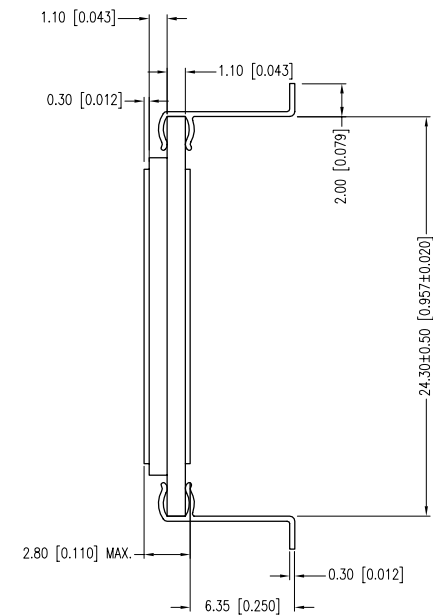





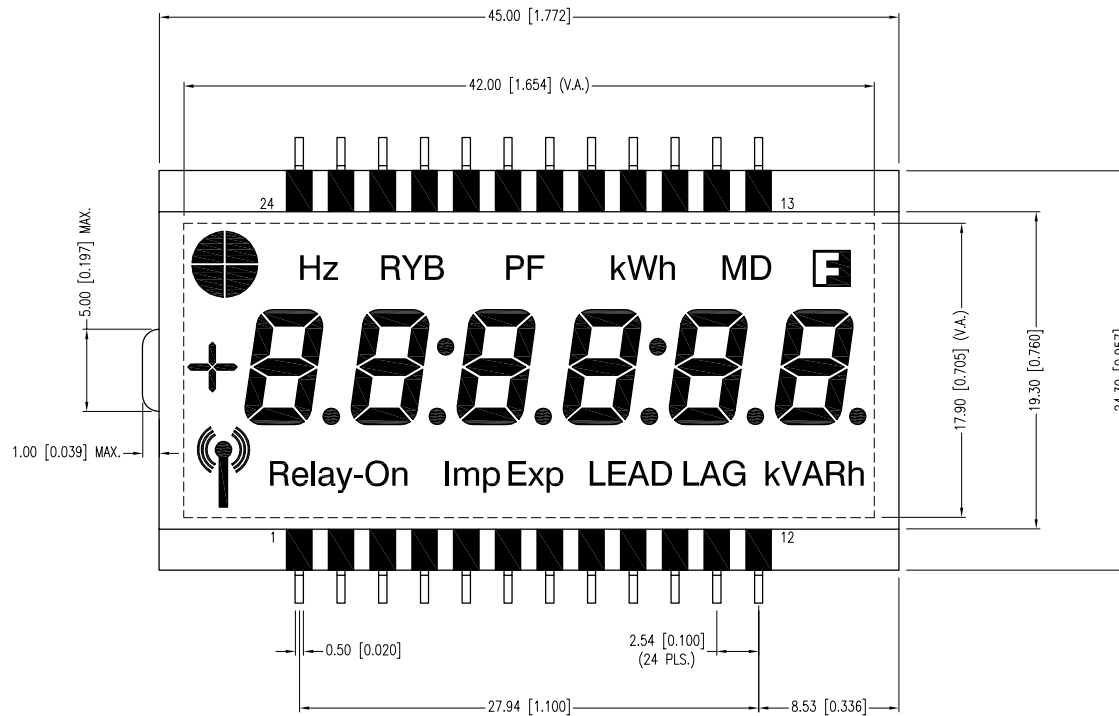


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1	COM1				X23	X22	X15	6B	6A	5B	5A	X12	4B	4A	3B	3A	X11	X7	2B	2A	1B	1A	X3	X1
COM2		COM2			X24	X21	X16	6C	6F	5G	5F	X13	4G	4F	3G	3F	X10	X8	2G	2F	1G	1F	X4	X2
COM3			COM3			X20	X17	6C	6E	5C	5E	X14	4C	4E	3C	3E	X27	X9	2C	2E	1C	1E	X5	X26
COM4				COM4		X19	X18	P6	6D	P5	5D	P7	P4	4D	P3	3D		P8	P2	2D	P1	1D	X6	X25

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-40°C TO +85°C
STORAGE TEMP.	-40°C TO +85°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	24 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}

UNCONTROLLED DOCUMENT

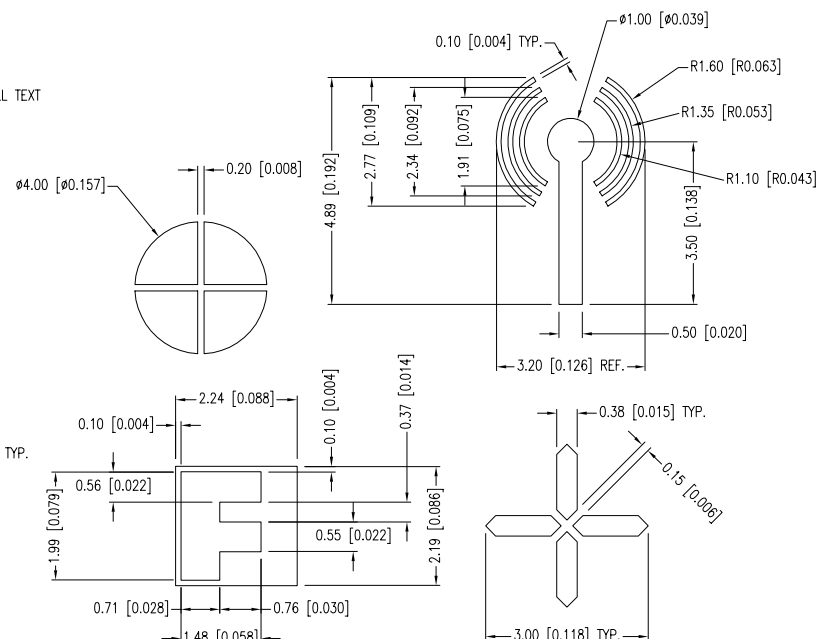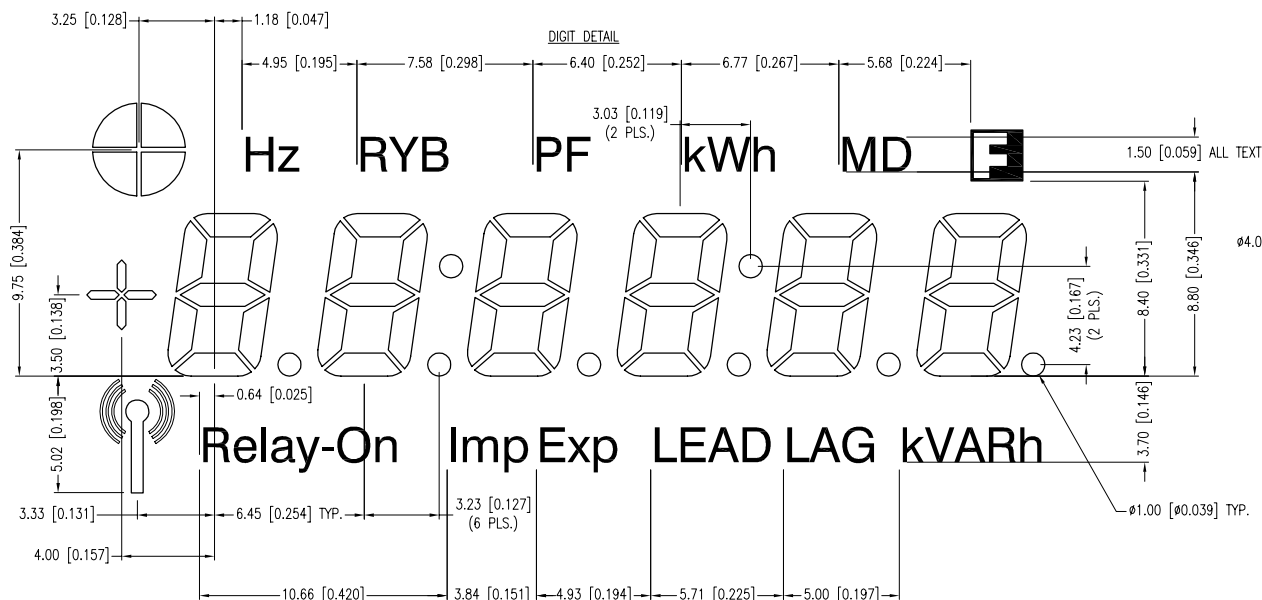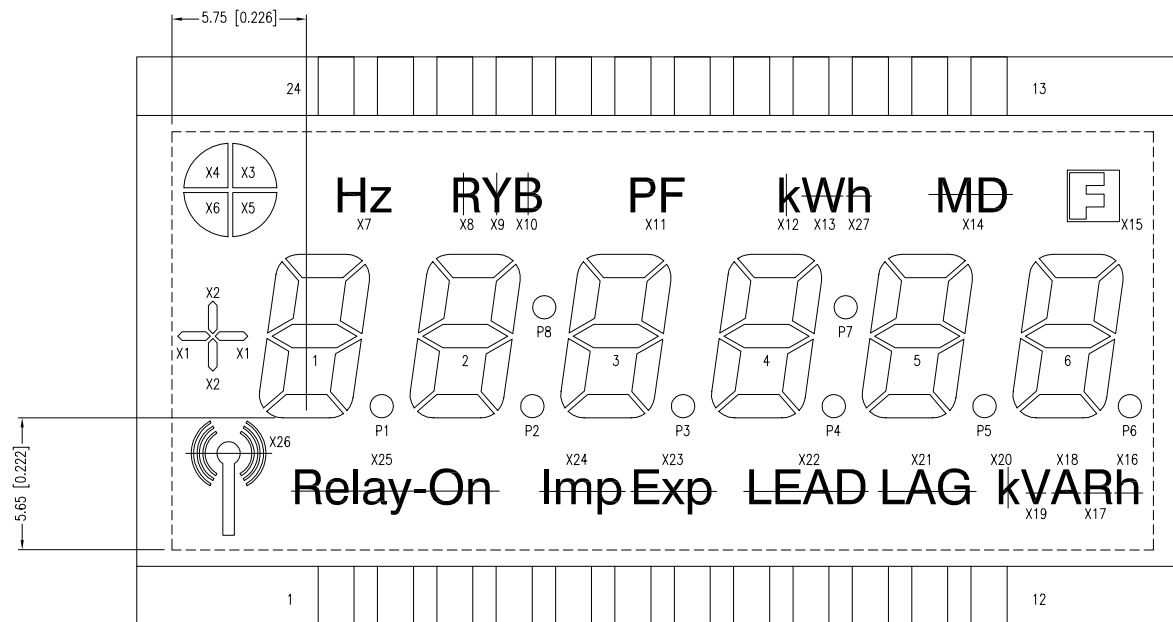

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+0.00}/_{-0.00} DECIMAL PRECISION MAX.=^{+0.00}/_{-0.00} DECIMAL PRECISION

UNCONTROLLED DOCUMENT