
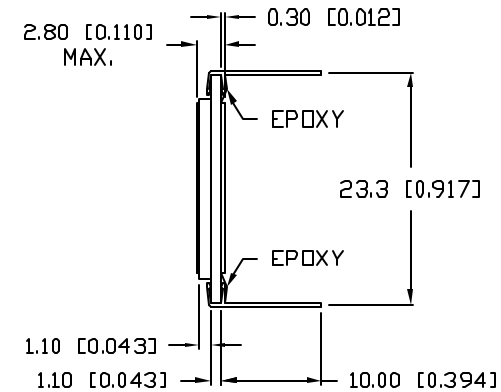


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H801M39TRREV.
B

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11168.	9.16.04
B	E.C.N. #11148.	02.07.07

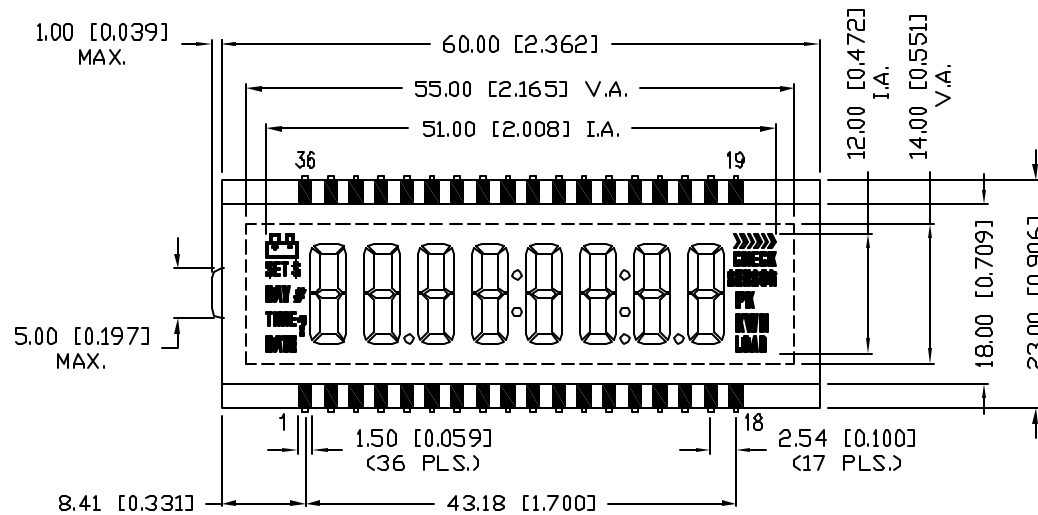

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-30°C TO 80°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	36 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -0.00 -DECIMAL PRECISION

REV.
BPART NUMBER
LCD-H801M39TR

8 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
6:00 VIEW, 1/4 DUTY, 36 PINS, WIDE OPERATING TEMP.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 12.17.03 PAGE: 1 OF 2 SCALE: N/A
-----------------	-------------	--------------	--



UNCONTROLLED DOCUMENT


UNCONTROLLED DOCUMENT

REV.

B

DATE _____

8	SEE PAGE 1
---	------------

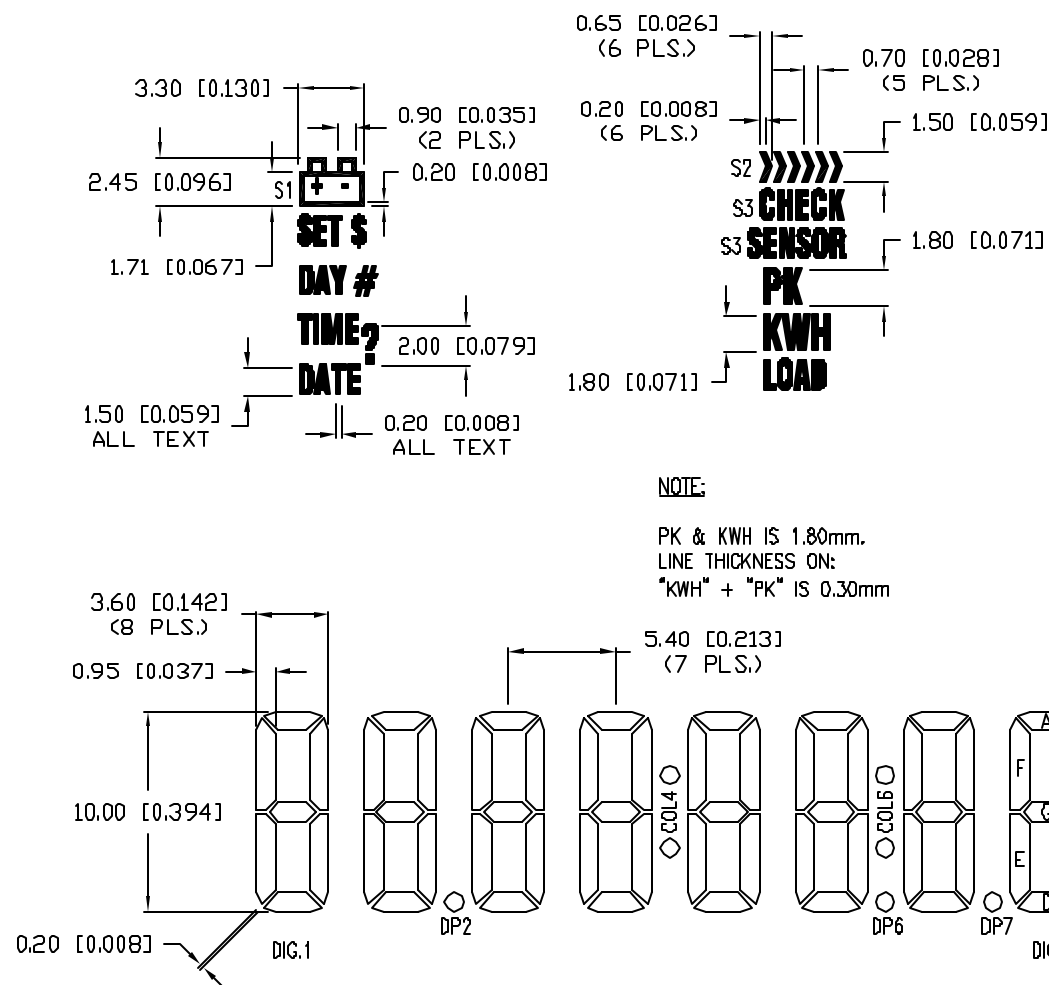

NOTE:

PK & KWH IS 1.80mm.
LINE THICKNESS ON:
"KWH" + "PK" IS 0.30mm

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
COM1	SET	1A	2A	3A	4A	-	5A	-	6A	-	7A	-
COM2	DAY	1B	2B	3B	4B	-	5B	-	6B	-	7B	-
COM3	TIME	1C	2C	3C	4C	-	5C	-	6C	-	7C	-
COM4	DATE	-	DP2	-	-	-	COL4	-	-	DP6	COL6	DP8
PIN NO.	13	14	15	16	17	18	19	20	21	22	23	24
COM1	8A	-	-	-	-	-	-	COM1	-	S2	-	8F
COM2	8B	-	-	-	-	-	COM2	-	-	S3	-	8G
COM3	8C	-	PK	H	-	COM3	-	-	-	KW	-	8H
COM4	-	-	-	-	COM4	-	-	-	-	LOAD	-	8I
PIN NO.	25	26	27	28	29	30	31	32	33	34	35	36
COM1	-	7F	-	6F	-	5F	-	4F	3F	2F	1F	\$
COM2	-	7G	-	6G	-	5G	-	4G	3G	2G	1G	#
COM3	-	7E	-	6E	-	5E	-	4E	3E	2E	1E	?
COM4	-	7D	-	6D	-	5D	-	4D	3D	2D	1D	\$

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

PART NUMBER

LCD-H801M39TR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DATE: 12.17.03

PAGE: 2 OF 2
SCALE: N/A

8 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
6:00 VIEW, 1/4 DUTY, 36 PINS. WIDE OPERATING TEMP.