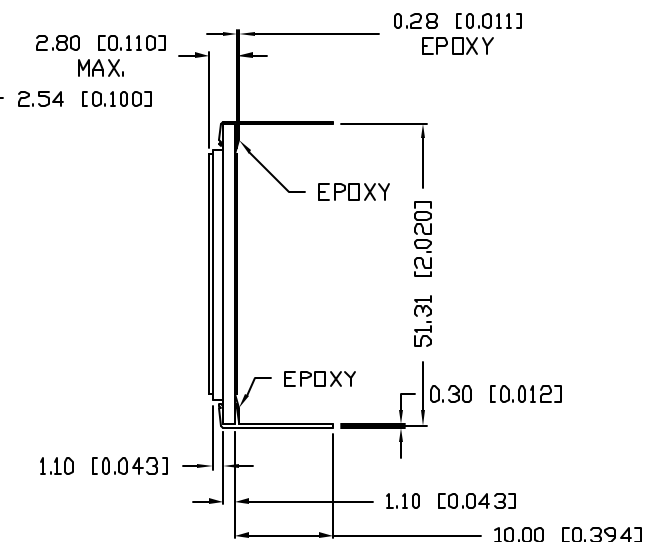
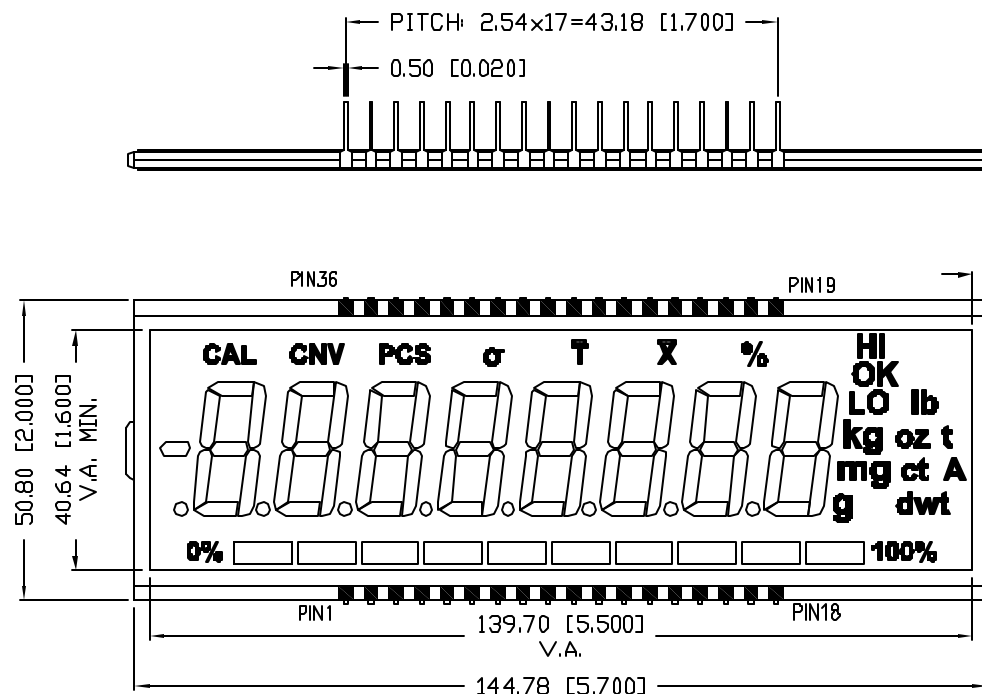


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-H801M65TRREV.
AREV. E.C.N. NUMBER AND REVISION COMMENTS
A E.C.N. #11148.DATE
02.07.07

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-30°C TO 80°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	36 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.
APART NUMBER
LCD-H801M65TR

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:
JC

CHECKED BY:


APPROVED BY:

DATE: 3.7.05
PAGE: 1 OF 1
SCALE: N/A


8 DIGIT CUSTOM LCD PANEL TN REFLECTIVE,
1/4 DUTY, 1/3 BIAS, WIDE OPERATING TEMP, 36 PINS.



UNCONTROLLED DOCUMENT

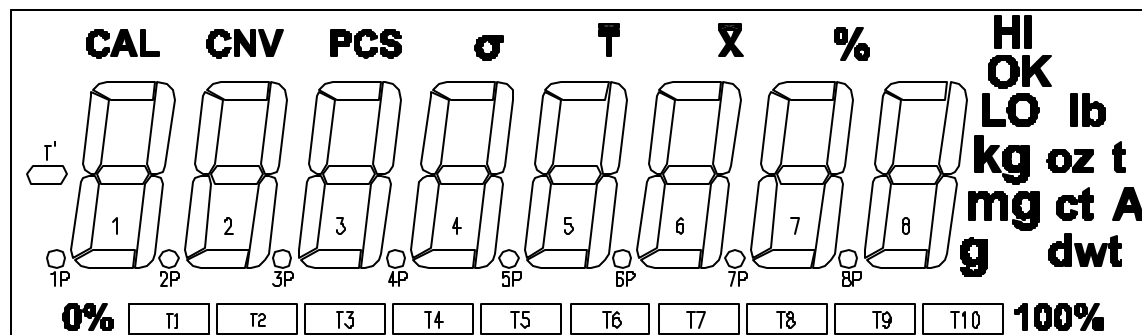

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	COM1	--	--	--	COM1	--	--	--	--	--	--	CAL	T5	T6	g	mg	kg	OK
COM2	--	COM2	--	--	--	COM2	--	--	--	--	--	T'	T4	T7	DWT	ct	LO	%
COM3	--	--	COM3	--	--	--	COM3	--	--	--	--	0%	T3	T8	100%	A	lb	HI
COM4	--	--	--	COM4	--	--	--	COM4	--	--	--	T1	T2	T9	T10	oz	t	--
PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1	T	8A	8F	7A	7F	6A	6F	5A	5F	4A	4F	3A	3F	2A	2F	1A	1F	σ
COM2	--	8B	8C	7B	7G	6B	6G	5B	5G	4B	4G	3B	3G	2B	2G	1B	1G	--
COM3	--	8C	8E	7C	7E	6C	6E	5C	5E	4C	4E	3C	3E	2C	2E	1C	1E	PCS
COM4	X	8D	8P	7D	7P	6D	6P	5D	5P	4D	4P	3D	3P	2D	2P	1D	1P	CNV

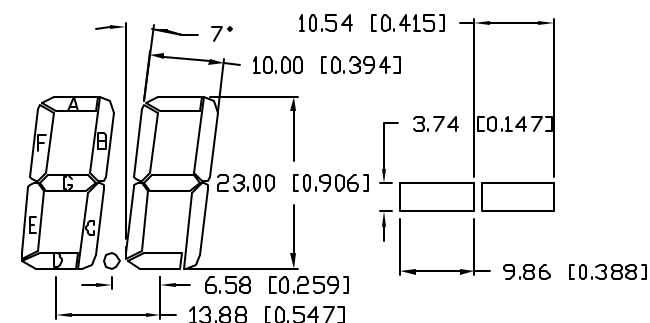

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX= +0.00 -DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-H801M65TR

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JG

CHECKED BY:

APPROVED BY:

DATE: 3.7.05

PAGE: 1 OF 1

SCALE: N/A

8 DIGIT CUSTOM LCD PANEL TN REFLECTIVE,

1/4 DUTY, 1/3 BIAS, WIDE OPERATING TEMP, 36 PINS.

UNCONTROLLED DOCUMENT


PART NUMBER
LCD-H801M65TRREV.
A

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

A

SEE PAGE #1

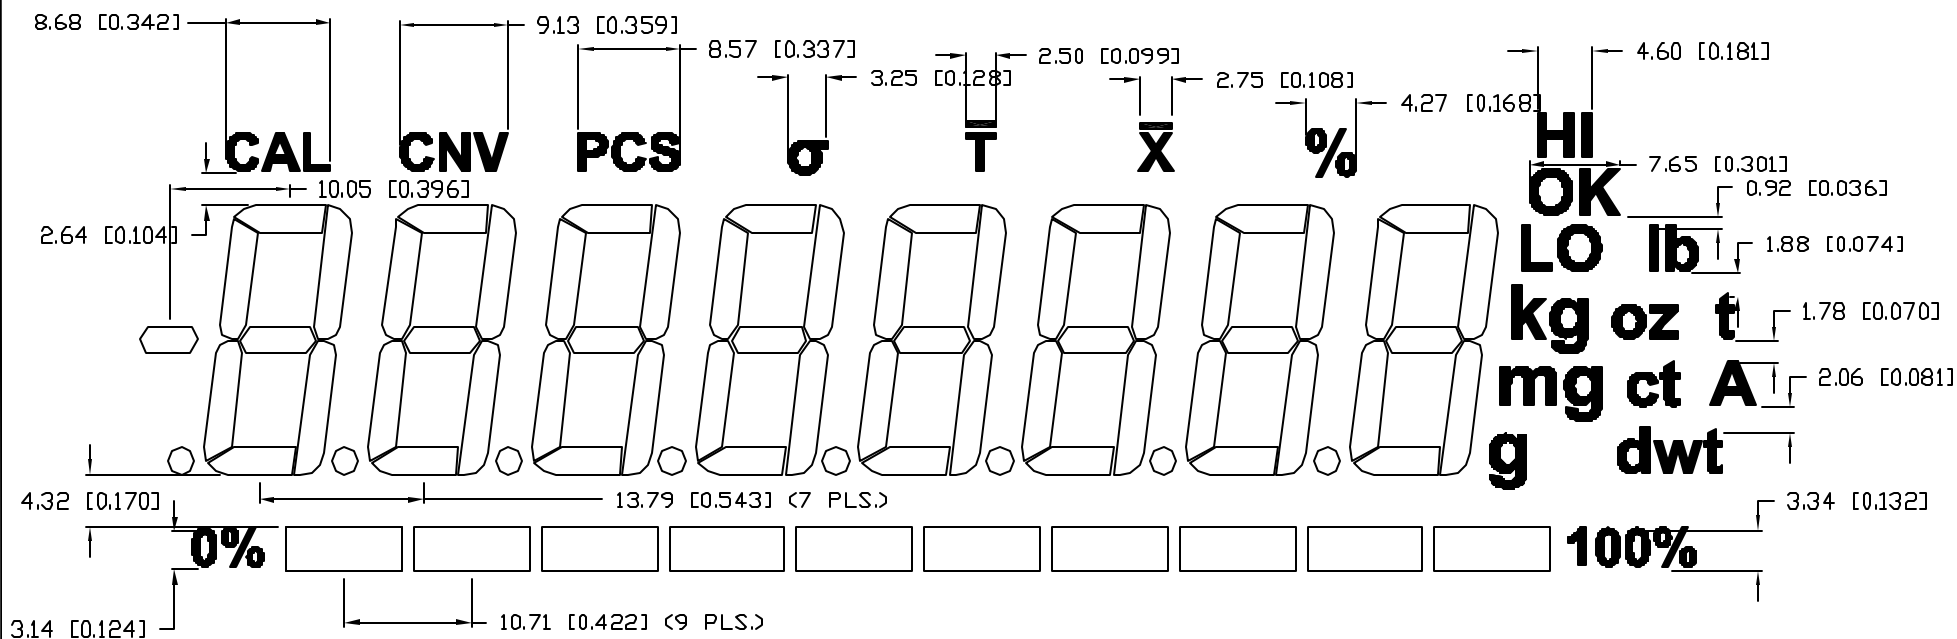

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX= +0.00 -DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-H801M65TR

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JG

CHECKED BY:

APPROVED BY:

DATE: 3.7.05

PAGE: 1 OF 1

SCALE: N/A

8 DIGIT CUSTOM LCD PANEL TN REFLECTIVE,

1/4 DUTY, 1/3 BIAS, WIDE OPERATING TEMP, 36 PINS.