


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-S2002M15TN

REV.
P3

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

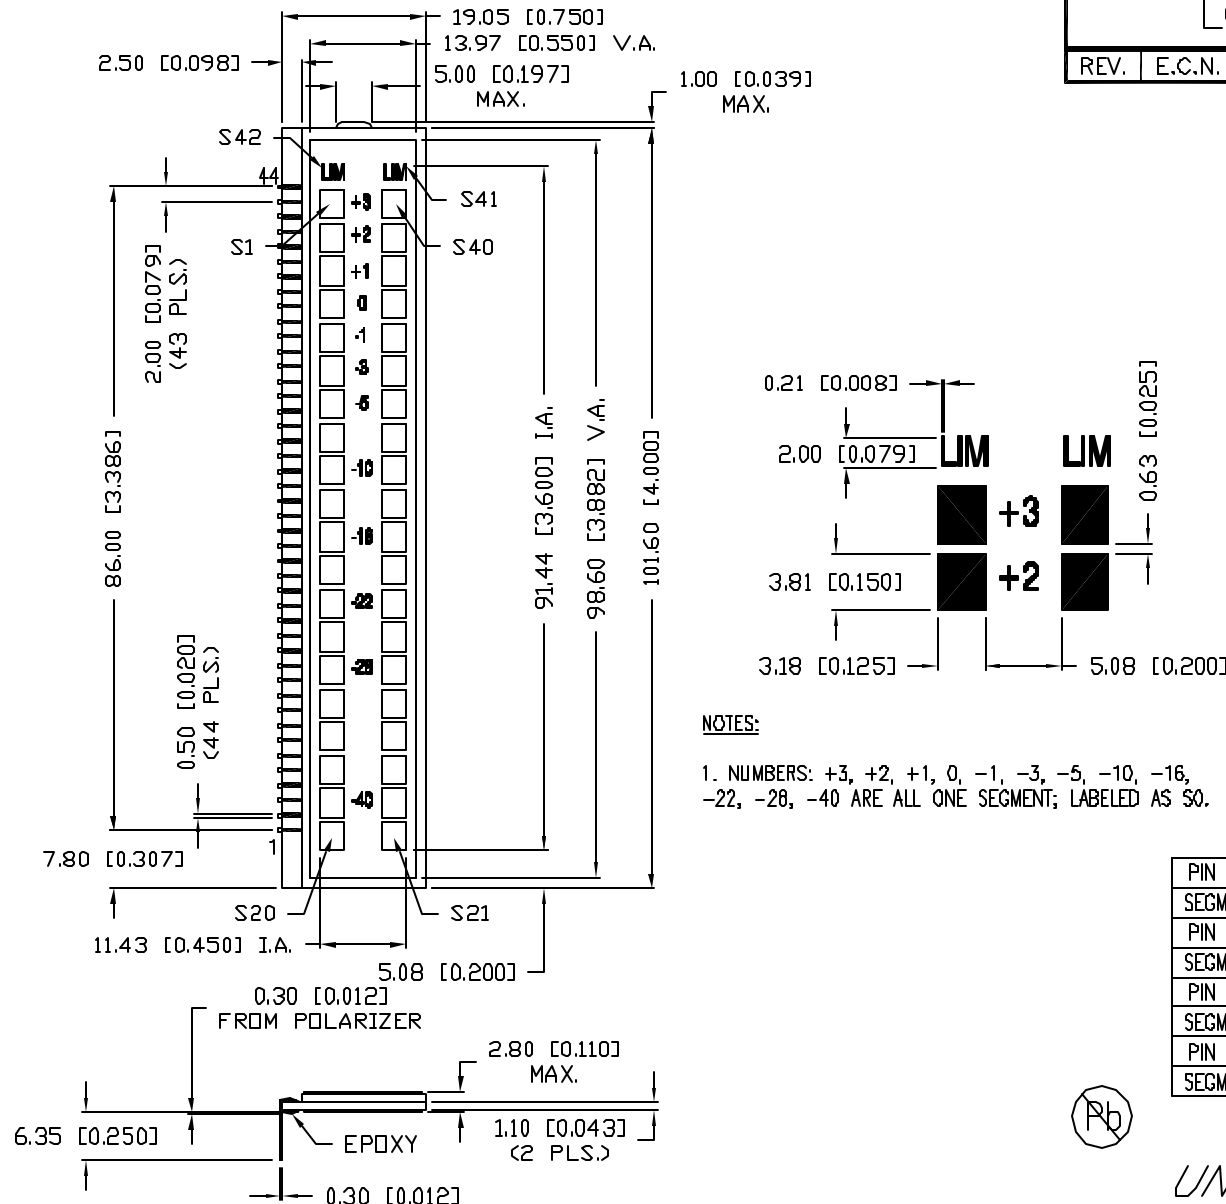

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	NEGATIVE IMAGE, BLACK
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSMISSIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	STATIC
CONNECTION TYPE	44 PINS

NOTES:

1. NUMBERS: +3, +2, +1, 0, -1, -3, -5, -10, -16, -22, -28, -40 ARE ALL ONE SEGMENT; LABELED AS S0.

PIN NO.	1	2	3	4	5	6	7	8	9	10	11
SEGMENT	COM	S20	S21	S19	S22	S18	S23	S17	S24	S16	S25
PIN NO.	12	13	14	15	16	17	18	19	20	21	22
SEGMENT	S15	S26	S14	S27	S13	S28	S12	S29	S11	S30	S10
PIN NO.	23	24	25	26	27	28	29	30	31	32	33
SEGMENT	S31	S9	S32	S8	S33	S7	S34	S6	S35	S5	S36
PIN NO.	34	35	36	37	38	39	40	41	42	43	44
SEGMENT	S4	S37	S3	S38	S2	S39	S1	S40	S0	S41	S42

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.
P3

PART NUMBER
LCD-S2002M15TN

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

CUSTOM LCD PANEL, TN, TRANSMISSIVE,
NEGATIVE IMAGE BLACK, 6:00 VIEW.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:

jc

CHECKED BY:

APPROVED BY:

DATE: 3.8.04

PAGE: 1 OF 1

SCALE: N/A